



Journal of Applied Research and Technology

ISSN: 1665-6423

[jart@aleph.cinstrum.unam.mx](mailto:jart@aleph.cinstrum.unam.mx)

Centro de Ciencias Aplicadas y Desarrollo

Tecnológico

México

Peña Eguluz, Rosendo; García Hernández, José Manuel; Ramírez Jiménez, Francisco Javier

A continuous radon monitoring system based on a solid-state silicon detector

Journal of Applied Research and Technology, vol. 5, núm. 1, april, 2007, pp. 3-9

Centro de Ciencias Aplicadas y Desarrollo Tecnológico

Distrito Federal, México

Available in: <http://www.redalyc.org/articulo.oa?id=47450101>

- How to cite
- Complete issue
- More information about this article
- Journal's homepage in [redalyc.org](http://redalyc.org)

[redalyc.org](http://redalyc.org)

Scientific Information System

Network of Scientific Journals from Latin America, the Caribbean, Spain and Portugal

Non-profit academic project, developed under the open access initiative

---

# A CONTINUOUS RADON MONITORING SYSTEM BASED ON A SOLID-STATE SILICON DETECTOR

---

R. Peña-Eguiluz<sup>1</sup>, J. M. García-Hernández<sup>2</sup> & F. J. Ramírez-Jiménez<sup>3</sup>

Instituto Nacional de Investigaciones Nucleares

AP 18-1027, 11801 México D.F., México

<sup>1</sup> Laboratorio de Física de Plasmas

<sup>2</sup> Departamento de Sistemas Electrónicos

<sup>3</sup> Laboratorio de Detectores de Radiación

Email: rpe@nuclear.inin.mx

## ABSTRACT

This paper describes the design of a programmable stay-alone continuous radon monitoring system able to detect, count and store the amount of alpha particles with an energy of 5.49 MeV produced by the radioactive decay of environmental radon-222. It is included the electronic circuit design, the software development as well as the user interface and the hardware ensemble of all the system components.

KEYWORDS: radon monitoring, microcontroller, alpha detector.

---

## 1. INTRODUCTION

Radon is a natural radioactive gas, resulting from the alpha decay of radium-226, which occurs naturally in all rocks and soils and it is given off at ground level. Therefore, we all breathe it throughout our lives. As it immediately disperses in the air, its concentration is very low. Yet, radon seeps in enclosed spaces like mines, houses, schools, and working places where it accumulates due to inappropriate ventilation systems. Its 3.82 day middle life-time enables all its isotopes formed in building materials, or in the earth at approximately one meter from the surface, to reach indoors. In fact, the most important natural radioactive exposition for humans is the radon inhalation, which represents almost the 50% of the average radiation dose. Nowadays, it is well known that the risk of developing lung cancer rises with the level of radon and the exposition time. International survey efforts have been carried out in several countries in order to establish some indoors radon level charts. The average radon level indoors varies considerably among countries, because of the soil characteristics, building materials, climate, etc. Some reported average radon levels are: UK 20 Bq/m<sup>3</sup>, USA is 46 Bq/m<sup>3</sup>, Germany 50 Bq/m<sup>3</sup>, Finland 123 Bq/m<sup>3</sup>, Sweden 108 Bq/m<sup>3</sup>, Ireland 60 Bq/m<sup>3</sup>, and Czech Republic 140 Bq/m<sup>3</sup> [1].


Radon detection by means of a real-time, portable and remote sensing instrument is a genuine necessity in several research fields such as environmental radon air monitoring [2], volcanic activity monitoring [3], uranium ore deposits or geothermal fields' research [4], and earthquake-radon correlation [5]. Thus, the monitoring system presented in this work aims to fulfill the following requirements for adverse environmental conditions: a) remote system capability, b) low power consumption and c) low sensitivity to temperature variations.

## 2. SYSTEM DESIGN

The system is composed of two elements: the main hardware electronics and the software implementation necessary to coordinate the overall architecture and to allow the data mining. The characteristics of the system are detailed in the next paragraphs along with its hardware system construction.


### 2.1. Electronic Design

The electronic diagram shown in Figure 1 represents the radon detection system. The proposed system is built from a Discriminating Industrial Alpha Detector (DIAD). Its operation can be described as follows: when any alpha particle interacts with the surface of the DIAD, an output voltage pulse of 5 V and 300 ns is generated only if the energy of the particle is within a selectable energy window. As the minimum detectable pulse width for a CHMOS 8-bit Microcontroller ( $\mu$ C) 87C51 interruption request is 1500 ns, a pulse-conditioning circuit between the DIAD single channel analyzer (SCA) output pin and the  $\mu$ C INT0 input pin is needed. Thus, a monostable circuit has been configured applying a retriggerable multivibrator 74HC123 in order to generate a 2000 ns pulse. Immediately after the interruption request is recognized, the  $\mu$ C becomes active, increasing the counting. After that, the  $\mu$ C goes to the idle mode operation, so to save power. Moreover, the real-time clock (RTC) 146818A, used as the absolute time base, produces an interrupt request every minute. Until the integrating time is achieved, the counting is stored into two bytes of 8 KB static random access memory (SRAM) 6264LP-10. All counting data are preceded by the main two time parameters, namely, the date and the integrating time. Thus, a reserved memory space is saved daily in order to establish a temporal relationship with the measures to be realized. After the counting is stored, the internal  $\mu$ C counting register is cleared, and the system goes to the idle mode again. Besides, other interruption source is established by the RS-232 drivers/receivers MAX232, when the user establishes communication with a portable computer. In order to maintain a minimum energy consumption, three voltage saving regulators have been applied, considering as an input voltage source a rechargeable battery of 12 VDC/6.5 AH. A CMOS Programmable micropower positive voltage regulator ICL7663S has been implemented in order to supply all the IC's with +5 VDC. Meanwhile, a combination of an ICL7663S and a CMOS voltage converter ICL7662 provides -9 VDC to the DIAD. The overall average system consumption is 27.5 mA at room temperature and it increases to 33.5 mA only during a communication with a PC. The system can operate, at least, 194 hours continuously with the proposed arrangement. In order to increase the energy autonomy of the system, a photovoltaic module of 10 W, MSX-10, connected through a photovoltaic battery charge regulator has been added to the power supply system.

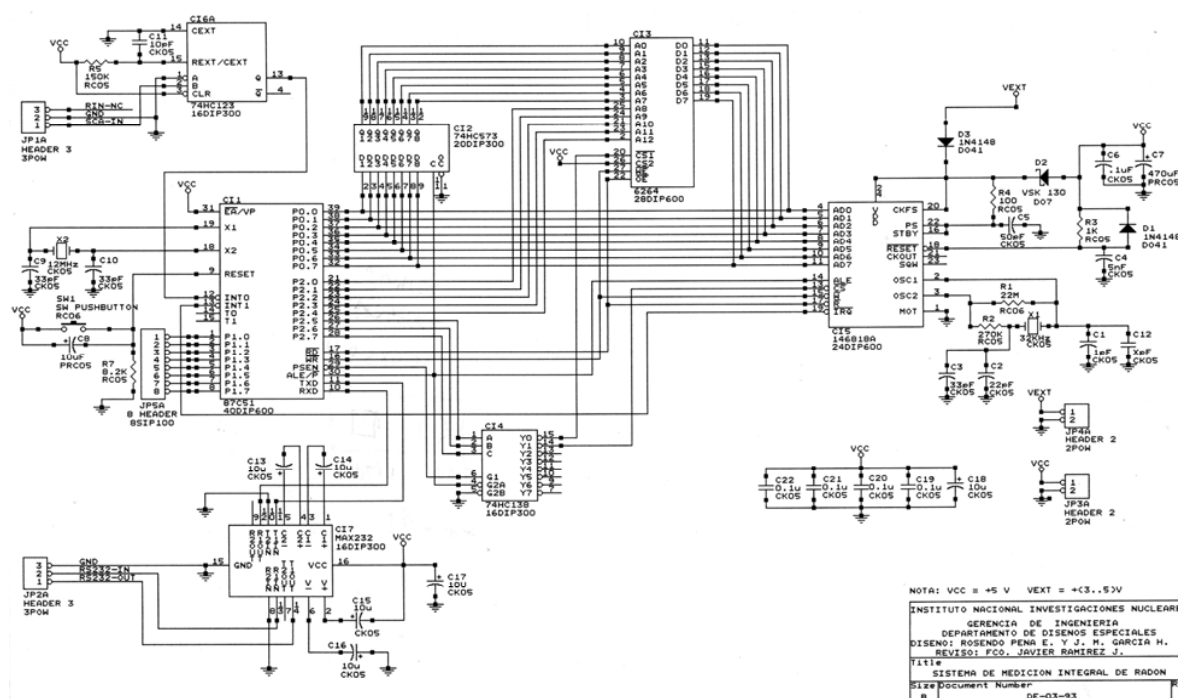

## 2.2. Software implementation


### 2.3. Construction

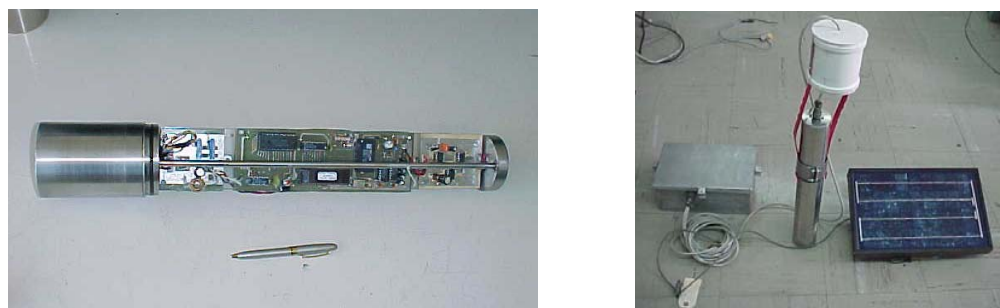

*Figure 2. a) The continuous monitoring radon electronic cards and 2.b) the system hardware.*

### 3. RESULTS AND DISCUSSION

The electronic part of the system has been tested by applying sequential pulses to the  $\mu\text{C}$  INT0 input pin, to find that the maximum frequency response is 32 kHz. In order to calibrate the behaviour of the whole system, an americium 241 alpha radioactive source was used, provided that the energy level of its emitted alpha particles is close to that of radon. Moreover, the detection system was exposed during several days to a controlled radon chamber; the results are shown in the figure 3 [6].

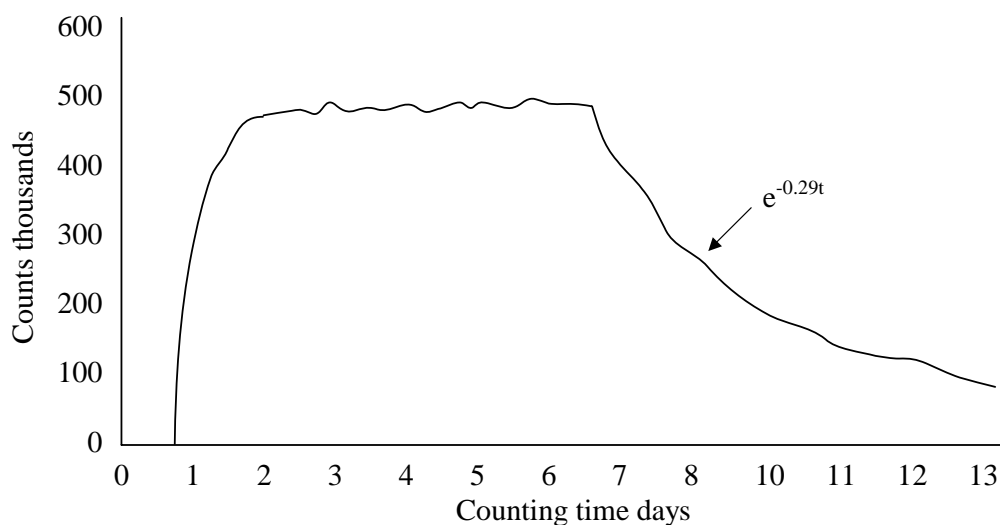

*Figure 3. Experimental detection characteristic obtained from controlled radon chamber exposure.*

The experimental outcome can be summarized as follows: after the radon concentration reaches equilibrium, the system presents a saturation counting region. After that, an exponential decay in the counting is observed once the system has been isolated from the chamber. The experimental time constant obtained from the data equals 3.44 days. This value is clearly smaller than the expected 3.82 days of the radon half life. The difference can be produced by the not fully hermetic interconnection between the radon chamber and the detector. In order to probe this hypothesis a commercial detector was connected in parallel with the constructed one. Under the same experimental conditions, the time constant obtained from the commercial system reaches 3.225 days. So, the response of the proposed system is higher than the commercial one.

The continuous radon monitoring system has been designed and tested successfully in a uranium chamber under controlled conditions in the laboratory, as well as in working conditions in a normal

environment. These tests took place also during several days. Thanks to the proposed design, the system initialisation, operation and exploitation became a simple task.

The applications of the monitoring system could be extended or oriented to the measurement of another sources of alpha nuclear particle emission.

#### 4. REFERENCES

- [1] World Health Organization, [www.who.int/entity/phe/radiation/en/2004Radon.pdf](http://www.who.int/entity/phe/radiation/en/2004Radon.pdf)
- [2] Nazaroff, W. W. and Nero, A. V. "Radon and its decay products in indoor air," John Wiley & Sons, New York, 1988.
- [3] Segovia, N., et al., *Rad. Meas.*, **34** (2001) 433-436.
- [4] Evans, R. D., *Health. Phys.*, **17** (1969) 229-252.
- [5] Liu, K. K., et al., *Pageoph*, **122** (1984) 231-244.
- [6] Balcazar, M., et al., *Nucl. Instr. and Meth. in Phys. Res. A*, **422** (1999) 809-811.

#### **Acknowledgements**

The authors wish to thank to M. J. Juárez N., G. H. Sánchez R., R. Hernández-Mendoza, G. Angeles-Parra, V. Hernández-Magadan and M. T. Torres for the technical aid.

#### Authors Biography



*Rosendo Peña-Eguiluz*

Received the B.Sc. and M.Sc. degrees in electronic engineering from the Instituto Tecnológico de Toluca (ITT), in 1992 and 1998 respectively, and the Ph.D. degree in electrical engineering from the Institut National Polytechnique de Toulouse (INPT), France, in 2002.

In 1992 he joined the Instituto Nacional de Investigaciones Nucleares (ININ) where he is currently a researcher, working on power electronics and instrumentation applied to generating and control plasma discharges. He has participated in several investigation projects and developments. His research interests include: modeling and control of power converters, electronic instrumentation, plasma technology, multi-converter multi-machine systems, motor drives and sensorless control.

Since 2005 he lectures graduate courses in mechanical engineering at the Universidad Autónoma del Estado de México (UAEM).



*José Manuel García-Hernández*

Received the B.Sc. and M.Sc. degrees in electronic engineering from the Instituto Tecnológico de Toluca (ITT) in 1994 and 1999 respectively.

He is now working towards the Ph.D. degree in electronic engineering; his current research interest is in the field of power quality phenomena oriented to electronic sensitive devices and the application of digital methods to electrical measurements. He is presently professor of digital electronic of the ITT.



*Francisco Javier Ramírez-Jiménez*

Electronic engineer, studied at the Superior School of Mechanical and Electric Engineering (ESIME) of the National Polytechnic Institute (IPN) of Mexico in 1976. He got the PH.D. in electronic engineering in 2005 at the Technological Institute of Toluca (ITT).

He started working in the National Institute of Nuclear Research (ININ) in 1980, where their main activity has been the design of Nuclear Electronic Instrumentation. He has participated in several research projects and developments. At the moment he is responsible of the Laboratory of Radiation Detectors that is headquarters of the Regional Center for Training in Repair of Radiation Detectors and Analog Electronics of Cooperative Regional Arrangements for the Promotion of the Science and the Nuclear Technology in Latin America.

He patented the invention of a "System to Detect Capacitively the displacement and the Speed in Axial Movements". He has teaching experience for more than 15 years imparting different subjects on electronics and more than 20 specialized courses in the nuclear field, including international courses organized by the OIEA.