



Dyna

ISSN: 0012-7353

dyna@unalmed.edu.co

Universidad Nacional de Colombia
Colombia

Celis-Montero, Jorge Enrique; Fernando-Navas, Diego; Castro-Aranda, Ferley
Implementation of a non-conventional method to characterize voltage sags and swells
Dyna, vol. 83, núm. 195, febrero, 2016, pp. 69-76
Universidad Nacional de Colombia
Medellín, Colombia

Available in: <http://www.redalyc.org/articulo.oa?id=49644128009>

- How to cite
- Complete issue
- More information about this article
- Journal's homepage in redalyc.org

redalyc.org

Scientific Information System
Network of Scientific Journals from Latin America, the Caribbean, Spain and Portugal
Non-profit academic project, developed under the open access initiative

Implementation of a non-conventional method to characterize voltage sags and swells

Jorge Enrique Celis-Montero ^a, Diego Fernando-Navas ^b & Ferley Castro-Aranda ^b

^a Facultad de Ingeniería, EIEE, GRALTA, Universidad del Valle, Cali, Colombia. jorge.celis@correounivalle.edu.co

^b Facultad de Ingeniería, EIEE, GRALTA, Universidad del Valle, Cali, Colombia. diego.navas@correounivalle.edu.co

^c Facultad de Ingeniería, EIEE, GRALTA, Universidad del Valle, Cali, Colombia. ferley.castro@correounivalle.edu.co

Received: July 21th, 2014. Received in revised form: March 14th, 2015. Accepted: December 15th, 2015.

Abstract

Voltage sags and swells are among the power quality disturbances that represent the biggest economic losses for affected users. It is therefore necessary to undertake a suitable characterization of those events to conduct studies that permit the causes and possible mitigation techniques to be identified. This work describes the development of monitoring modules to characterize voltage sags and swells that could be used in Electromagnetic Transients Programs - EMTP (for example the ATP – Alternative Transients Program). The implemented module uses a novel method to characterize these disturbances. The results of the implementation show that the voltage sags and swells are appropriately characterized; furthermore, less sampled data is required from a voltage signal with respect to the conventional RMS voltage method. This could optimize the capture and analysis process of information in power quality monitoring.

Keywords: Electromagnetic transient analysis, parameter estimation, power distribution faults, power quality, power system modeling, simulation, simulation software, time-domain analysis.

Implementación de un método no convencional para caracterizar hundimientos y elevaciones de tensión

Resumen

Dentro de los problemas de calidad de potencia que acarrear mayores pérdidas económicas sobre los usuarios afectados se encuentran los hundimientos y elevaciones de tensión. Debido a ello, se hace necesario caracterizarlos adecuadamente para emprender estudios que permitan identificar sus causas y posible formas de mitigación. En el presente trabajo se describe el desarrollo de un módulo de monitoreo para caracterizar hundimientos y elevaciones de tensión, el cual se puede usar en el Programa de Transitorios Electromagnéticos - EMTP (como ATP – Programa Alternativo de Transitorios). El módulo implementado usa un novedoso método para la caracterización de estos disturbios. Los resultados de la implementación muestran que los hundimientos y elevaciones son caracterizados adecuadamente, además, que el método requiere menos muestras de la señal de tensión respecto al método convencional de tensión RMS, lo cual podría optimizar el proceso de captura y análisis de la información durante el monitoreo de calidad de potencia.

Palabras clave: Análisis de transitorios electromagnéticos, análisis en el dominio del tiempo, calidad de potencia, estimación de parámetros, fallas en sistemas de distribución, modelado de sistema de potencia, simulaciones, software de simulación.

1. Introduction

For the development of smart grids, efficiency in detecting events of power quality is an important task in monitoring the power system.

The power quality disturbances that currently cause the greatest damage to industrial and commercial users are voltage

sags [1-3]. A voltage sag is the sudden reduction of voltage at a particular point in an electricity supply system below a specified threshold, followed by its recovery after a brief interval between half cycle and 1 min [3].

When these disturbances are manifested, many industrial processes are halted because of inadequate operation of electronic equipment [4] like programmable logic controllers

(PLC), computers and variable speed drives [6], as well electric induction motors [7]. Furthermore, controlled bridge rectifiers, generally used in DC motor speed controls, as well as in HVDC links, are also affected by voltage sags [8].

Sags are usually accompanied by voltage swells, which are sudden voltage increases above a threshold, between 110% and 180% of nominal voltage [3]. Both are caused by faults in electrical supply lines and are produced either by short circuits or by insulation faults due to lightning strokes [9], the starting up of large induction motors [10], operation of arc furnaces, or the load transfer between power supplies [11].

Current standards of power quality are quite precise in defining the necessary parameters to characterize voltage sags and swells [12]. The IEC 61000-4-30 standard [13] defines magnitude and duration as the sole parameters to characterize these disturbances.

Nevertheless, magnitude and duration are not the only parameters of voltage sags and/or swells that influence equipment behavior. The imbalance of sag and/or swell based on the type of fault (single-phase, phase-to-phase, or three-phase), the missing voltage, phase angle or point-on-wave, and phase shift are other parameters that also differentiate one event from another and that have a distinct impact on susceptible equipment [13,14].

Therefore, there is a need to employ additional methods that characterize non-standard parameters of voltage sags and swells in order to evaluate other effects. There are other non-conventional methods that have been used to characterize some voltage sags and swells parameters.

The fundamental voltage component uses the Sliding Discrete Fourier Transform (SDFT) method to analyze non-stationary signals including voltage sags and swells [15,16].

The DQ transformation, also known as Park's transformation, is commonly used when modeling synchronous and induction motors. This transform has been used to study several power quality disturbances [17,18]. It is possible given that the three-phase AC voltages can be represented as DC voltages when applying the DQ transformation through which any disturbance in AC voltage is reflected as a disturbance in DQ values.

The Waveform Envelope method [19], is an approximate alternative that seeks to determine the initial and final times of a voltage sag, as of the waveform of the instantaneous voltage. However, other characteristics such as magnitude or phase shift cannot be obtained by this method.

The Kalman Filter is a method based on models that has been used in power systems to trace harmonics in real time [20], to estimate voltage and current parameters in protection systems and to estimate transient parameters [21]. There are at least two models to analyze voltage sags and swells with this method [22]: the linear model, which considers the magnitudes and angles of each harmonic component as state variables, and the extended model, which considers the frequency and the state variables of the linear model as its state variables.

The Wavelet Transform (WT) is a useful mathematical tool to analyze non-stationary signals [23]. It has been used to analyze electrical signals in power systems [24]. To study the voltage sags and swells, the multi-resolution analysis

(MRA) is quite useful. The detail components provide information about the beginning and end of the said disturbances while the magnitude can be determined by two methods: the Discrete Wavelet Transform (DWT) coefficients method and the phasor method [22].

The Numerical Matrix method is generally used as a voltage sag detection technique for a Dynamic Voltage Restorer (DVR) [25]; however, the method is so adaptable and easy to apply that it could be used to characterize voltage sags and swells parameters.

This paper presents the implementation of Numerical Matrix method to characterize voltage sags and swells in EMTP.

This document is organized as follows. In Section II, the Numerical Matrix method is explained. In Section III, standard voltage sag signals are used to compare the performance of some characterization methods, including the Numerical Matrix method. Section IV describes the method implementation in EMTP and its performance in analyzing some events that were simulated in the IEEE 13-node test feeder. Finally, Section V presents this paper's conclusions.

2. Numerical Matrix

This method has been used as part of the DVR's control system [25]. It has small response times and yields results that can be directly interpreted. As such, the method is applied to each phase independently and it, monitors the start and end of the voltage sag, the remaining voltage and the phase shift.

The method involves sampling the voltage signal and storing it in matrix format. Whenever the dominant frequency components from the source are known, the following equations may be used:

$$V_{p1} = |V_1| \cos(\omega_1 t + \phi_1) + |V_5| \cos(\omega_5 t + \phi_5) \quad (1)$$

$$V_{p2} = |V_1| \cos(\omega_1 t - \omega_1 T_s + \phi_1) + |V_5| \cos(\omega_5 t - \omega_5 T_s + \phi_5) \quad (2)$$

$$V_{p3} = |V_1| \cos(\omega_1 t - 2\omega_1 T_s + \phi_1) + |V_5| \cos(\omega_5 t - 2\omega_5 T_s + \phi_5) \quad (3)$$

$$V_{p4} = |V_1| \cos(\omega_1 t - 3\omega_1 T_s + \phi_1) + |V_5| \cos(\omega_5 t - 3\omega_5 T_s + \phi_5) \quad (4)$$

where V_{p1} is the current sample of the voltage; V_{p2} , V_{p3} , and V_{p4} are the samples of the voltage in prior sampling periods, $|V_1|$ and $|V_5|$ are the magnitudes of the fundamental and 5th harmonic, ϕ_1 and ϕ_5 are the corresponding phase angles, ω_1 and ω_5 are the angular frequencies of the fundamental and 5th harmonic, and T_s is the signal's sampling period.

Depending on the number of harmonics detected in the voltage signal, the number of equations to be solved can decrease or increase so that the number of simultaneous equations required to find a solution is always double the total number of frequencies considered.

If the dominant harmonics are not included in the equations, or if they are unknown, the solution can contain errors. This

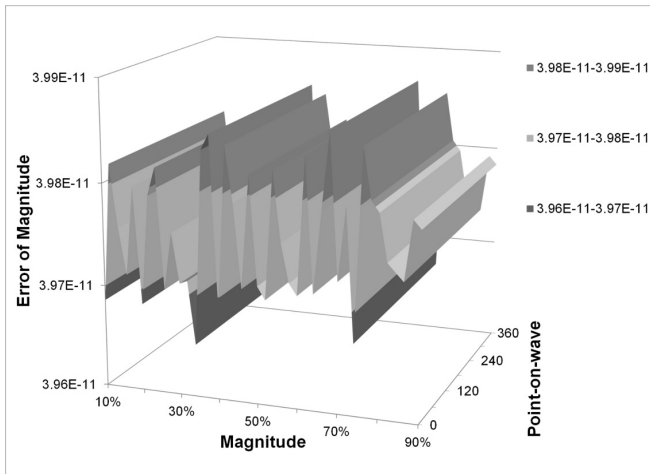


Figure 3. The Numerical Matrix method's error of magnitude when analyzing standard signals.
Source: The authors.

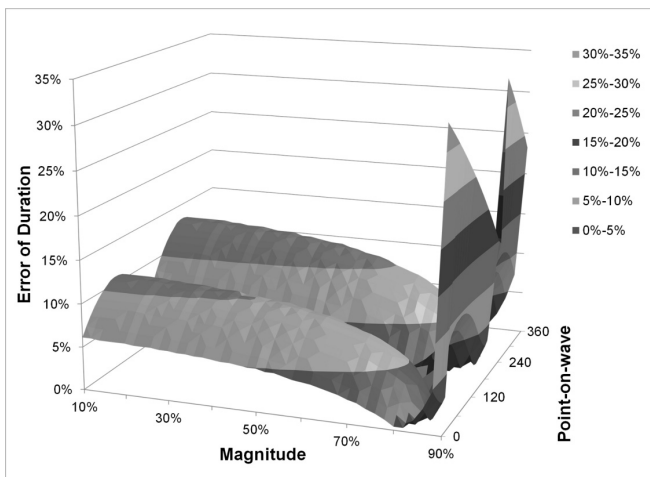


Figure 4. The RMS Voltage method's error of duration of when analyzing standard signals.
Source: The authors.

The relative error of duration obtained with the fundamental voltage component method (SDFT) is shown in Fig. 5. It can be seen that the error is higher than with the RMS voltage method; this is because the SDFT needs to analyze a whole period of the signal to deliver a result.

Finally, Fig. 6 shows the lowest error in estimating duration, which is obtained with the Numerical Matrix method.

When comparing results the Numerical Matrix method is suitable to characterize voltage sags and swells because it has the lowest error in estimating magnitude and duration of these disturbances. As such, this method has been selected to be used in the electromagnetic transient analysis software EMTP.

4 Implementation of numerical matrix method in EMTP

By comparing the results yielded by existing voltage sag and swell characterization methods, it was possible to determine

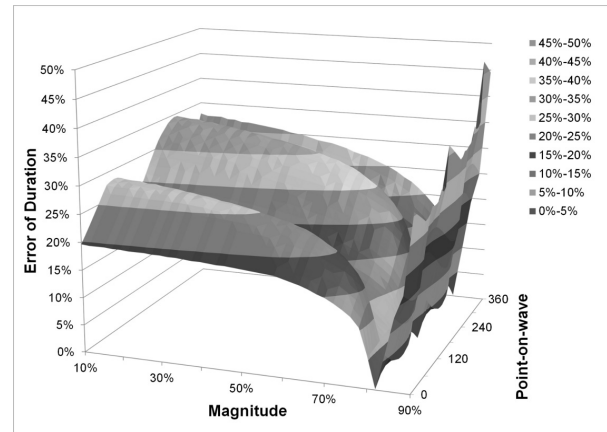


Figure 5. The Voltage Fundamental Component method's (SDFT) error of duration of when analyzing standard signals.
Source: The authors.

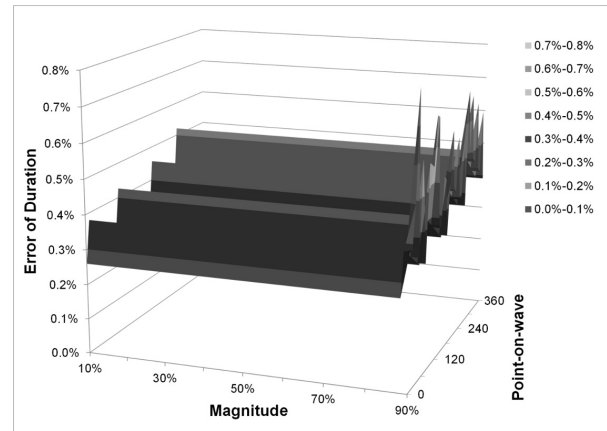


Figure 6. The Numerical Matrix method's error of duration when analyzing standard signals.
Source: The authors.

that the Numerical Matrix method delivers the least errors in estimating the magnitude and duration of these disturbances. Therefore, this method will be adapted to create a monitoring module to characterize voltage sags and swells.

The monitoring module must be able to analyze a sinusoidal-type signal, of any magnitude, frequency, and phase angle; a signal that must be delivered by the simulation tool employed. The results obtained by this module must be the sum of events occurring during the time of signal analysis indicating the type of disturbance, the magnitude and duration, the graphic of the magnitude of the fundamental component and additionally, the graphic of the phase shift during the period analyzed.

The algorithm developed for the monitoring module must include the execution of the Numerical Matrix method over simulation time. As was previously explained, this method delivers the magnitude of the fundamental voltage of the signal analyzed. Thereafter, the algorithm must carry out, in each simulation step, the comparison of the voltage magnitude with the detection threshold; it must register the instants during which that threshold is surpassed and, thus,

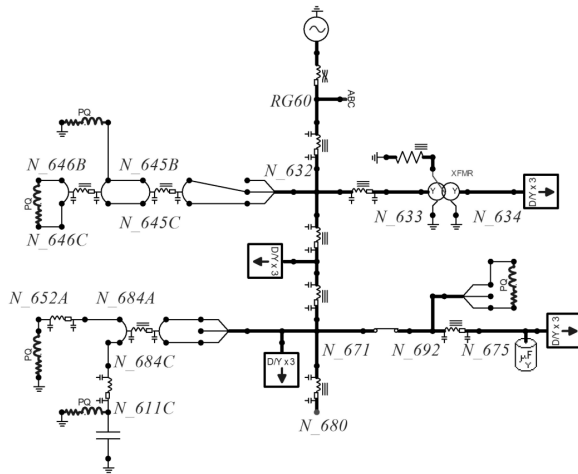


Figure 7. IEEE 13 node reference system implemented using EMTP (ATP). Source: [28]

determine the duration of the disturbance. Finally, the algorithm must deliver the record of the events found along with the characteristics of magnitude and duration.

The monitoring module was developed using the transient analysis tool EMTP (ATP), and the programming of the algorithm was carried out using FORTRAN.

For the corresponding test of the monitoring module that was implemented, we modeled the IEEE 13-node test feeder [28]. However, the voltage regulator was omitted and all loads were modeled as constant impedances (Fig. 7).

The N_675 node was chosen as the measuring node on the reference system while the failures were generated on N_632 node.

With a sampling time of 1.302E-4 s (128 samples per cycle at 60-Hz), the voltage signals in the measuring node were recorded when a single-phase-to-ground fault of 0.6Ω-impedance and 74 milliseconds in duration was generated in N_632 node. Fig. 8 shows the resulting signals and it is evident that there is a voltage sag on phase C along with a slight increase in the maximum voltage in other phases.

The monitoring module was localized in the measuring node for characterizing the voltage sags and swells.

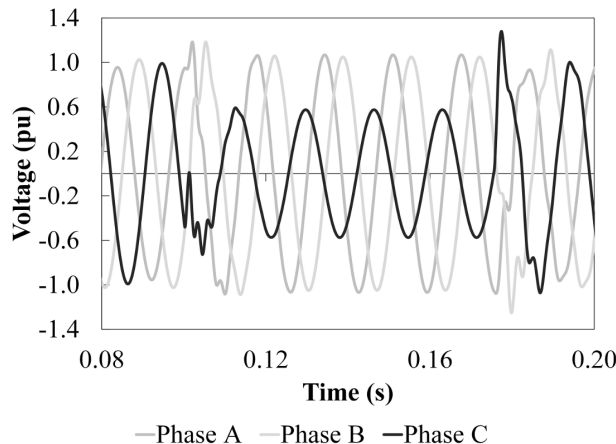


Figure 8. Instantaneous voltages in the measuring point. Source: The authors.

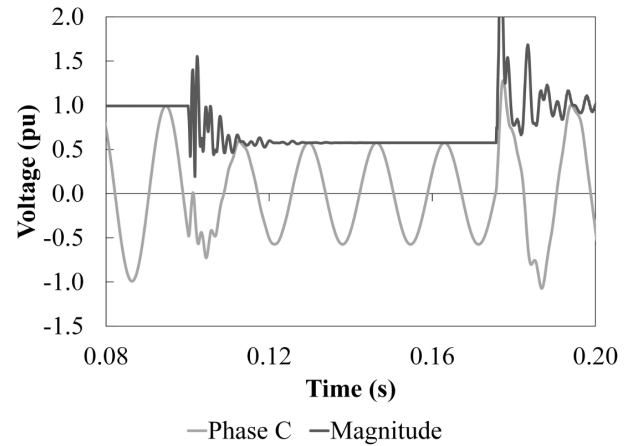


Figure 9. Magnitude of the fundamental voltage of phase C from node N_675, obtained with the monitoring module. Source: The authors.

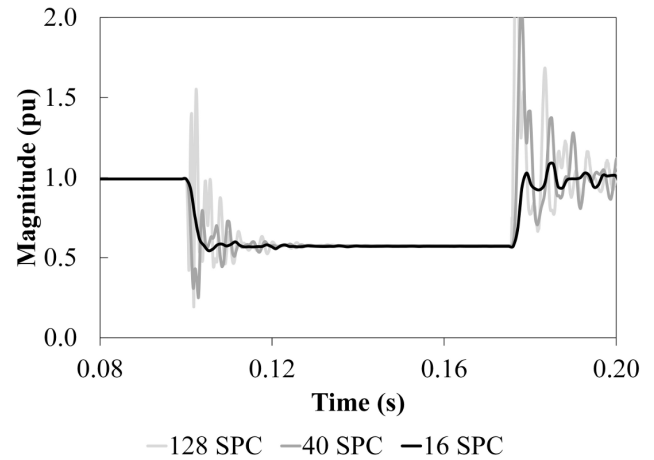


Figure 10. Magnitudes of the fundamental voltage of phase C considering different sampling times (SPC: Samples per cycle). Source: The authors.

Fig. 9 shows the comparison of the voltage input signal of phase C with the magnitude of the fundamental voltage given by the monitoring module. As seen in the figure, there are oscillations of fundamental voltage magnitude at the beginning and end of the voltage sag. These are related to the low-frequency oscillatory transients that the voltage signal presents in those instants.

As the sensitivity of the matrix in the numerical matrix method depends on the amount of harmonics in the model and the sampling period, the monitoring module was adjusted to include four harmonic components in the model (fundamental, 5th, 7th and 11th harmonics), and the sampling times were varied to reduce the error in the results.

Fig. 10 shows the magnitudes of fundamental voltages obtained for the stated case while considering different sampling times. As can be verified, as the sampling times increase, the oscillations in the magnitude are reduced.

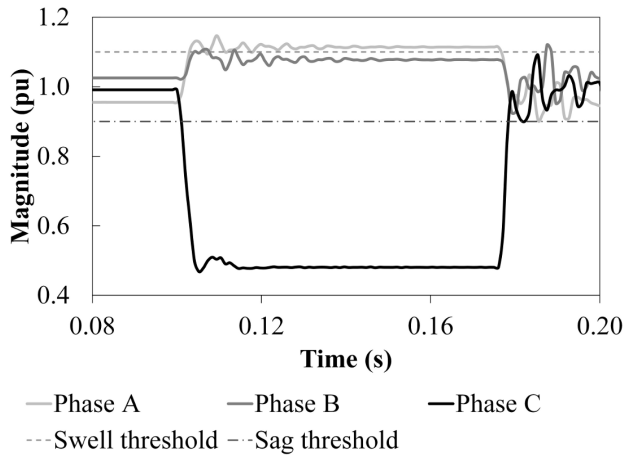


Figure 11. Magnitudes of N_675 node's voltages for a single-phase fault on N_671 node.

Source: The authors.

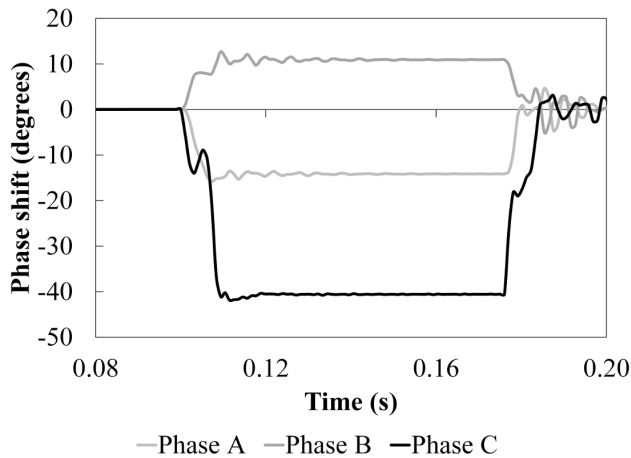


Figure 12. Phase shift for the voltages of the N_675 node, obtained with the monitoring module.

Source: The authors.

Accordingly, we chose a 1.04167×10^{-3} s sampling time (16 samples per cycle) to analyze the various types of faults in the reference system. Fig. 11 shows the magnitudes of the three-phase voltages in the measuring node when a single-phase fault exists on phase C of the N_671 node with a fault impedance of 0.7Ω . In this case, a voltage sag in phase C and a voltage swell in phase A were observed.

Fig. 12 shows the phase shift of each phase given by the monitoring module. This parameter was calculated independently with respect to the angle of each signal.

To determine if the results obtained by the monitoring module were accurate, the relative error percentage was found, which was calculated from "real values". To establish the real duration of each event, the time difference between the beginning and end of the fault current was determined, while the result given by the RMS voltage method according to IEC 61000-4-30 [13] was used for the magnitude.

Table 1 shows the results given by the monitoring module for various simulated cases.

Table 1.

Comparison of results of the monitoring module implemented in EMTP

Disturbance	Event detected	EMTP Result	Real Result	Relative Error
N_671: Ph-Gr in phase C Zf = 0.7Ω	Ph. A: Swell	112.63%	113.83%	-1.055%
		68.75 ms	76.04 ms	-9.589%
	Ph. B: No event	NE	NE	NE
		NE	NE	NE
	Ph. C: Sag	47.70%	47.80%	-0.221%
		76.04 ms	76.04 ms	0%
N_671: Ph-Ph in phases AB Zf = 1.0Ω	Ph. A: Sag	73.77%	73.06%	0.968%
		81.25 ms	80.21 ms	1.299%
	Ph. B: Sag	40.30%	40.61%	-0.765%
		84.38 ms	80.21 ms	5.195%
	Ph. C: Swell	118.20%	118.15%	0.047%
		73.96 ms	80.21 ms	-7.792%
N_633: Ph-Ph-Gr in phases CA Zf = 0.5Ω	Ph. A: Sag	44.33%	44.39%	-0.137%
		81.25 ms	80.21 ms	1.299%
	Ph. B: Swell	112.68%	113.09%	-0.362%
		70.84 ms	80.21 ms	-11.688%
	Ph. C: Sag	63.36%	64.27%	-1.419%
		76.04 ms	80.21 ms	-5.195%

Ph-Gr: Phase-to-ground fault

Ph-Ph: Phase-to-phase fault

Ph-Ph-Gr: Phase-to-phase-to-ground fault

Zf: Fault impedance

NE: No Event

Source: The authors.

From the results shown in this table, it can be stated that the monitoring module implemented in EMTP furnishes results with very low errors; hence, it is quite effective in characterizing these disturbances.

5. Conclusions

It is necessary to study other characteristics of voltage sags and swells, which will be useful to develop an analysis of the causes and the impacts they have. Phase shift may be considered to be another characteristic that could be studied. However, no standard procedure exists to determine the phase shift presented by voltage when it is affected by sag or swell. In terms of future work, a methodology must be established to measure this characteristic, as well as the identification of the correlation between phase shift and fault cause.

The monitoring module that was developed to characterize voltage sags and swells showed good results for the analysis of simulated signals. However, the accuracy of the results depends on the presence of noise in the signals that were analyzed. Therefore, if we want to implement it in a real system we must consider additional possibilities in real time signal processing, such as applying low pass filters, establishing the predominant harmonics of voltage signals at the start of the measurements, and setting the sampling time according to the noise signal present, etc.

The advantage of using the Numerical Matrix method to characterize voltage sags and swells is that it requires less data from voltage signals in comparison to the RMS voltage

conventional method. This means that the process of capture, analysis and storage of information in power quality monitoring can be accelerated.

In terms of future work, the monitoring module could be complemented by analyzing real signals, and the results compared with those obtained by conventional measurement equipment.

References

- [1] Waskito, F. and Banmongkol, C., Simulation of the voltage sag effects on an induction motor, International Conference on Consumer Electronics, Communications and Networks (CECNet), pp. 731-734, 2011. DOI: 10.1109/CECNET.2011.5768900.
- [2] Villate-Martinez, J. y Garcia-Tejedor, J., La calidad del suministro eléctrico y su mejora mediante convertidores de potencia. Revista DYNA, 79(3), pp. 30-34, 2004.
- [3] Yamamoto, K., Ikeda, K., Tsurusaki, Y. and Ikeda, M., Characteristics of voltage Sag/Swell compensator utilizing single-phase matrix converter, International Conference on Electrical Machines and Systems, pp. 1863-1868, 2013. DOI: 10.1109/ICEMS.2013.6713300.
- [4] IEC. Electromagnetic compatibility (EMC). Environment. Voltage dips and short interruptions on public electric power supply systems with statistical measurement results. PD IEC/TR 61000-2-8, 1, Geneva: IEC, 2002.
- [5] Gil-Montoya, F., Manzano-Agugliaro, F., Gómez-Lopez, J. y Sánchez-Alguacil, P., Técnicas de investigación en calidad eléctrica: Ventajas e inconvenientes. Revista DYNA, 79(173), pp. 66-74, 2012.
- [6] Almeida, C. and Kagan, N., Using genetic algorithms and Fuzzy programming to monitor voltage sags and swells. IEEE Intelligent Systems [online]. 26(2), 2011. [date of reference July 3th 2014]. Available at: <http://ieeexplore.ieee.org/stamp/stamp.jsp?tp=&arnumber=5696715>. DOI: 10.1109/MIS.2011.2.
- [7] Gonçalves, J., Baptista, J., Neves, L. and Tadeu-Oliveira, F., Simulation of the effect of voltage transients on an induction motor with ATP / EMTP, International Conference on Renewable Energies and Power Quality (ICREPPQ), pp. 63-69, 2009.
- [8] Dofnas, L., A novel method to mitigate commutation failures in HVDC systems, International Conference on Power System Technology (PowerCon), pp. 51-56, 2002. DOI: 10.1109/ICPST.2002.1053503.
- [9] Bollen, M.H.J., Voltage sags characterisation. Understanding power quality problems: Voltage sags and interruptions, 1st ed. New York, USA, Wiley, 2000, pp. 139-168.
- [10] Gomez, J.C., Reineri, C., Campetelli, G. and Morcos, M.M., A study of voltage sags generated by induction motor starting, Electric. Power Components and Systems, 32(6), pp. 645-653, 2010. DOI: 10.1080/15325000490228423.
- [11] Chen, C., Wang, H. and Chin, Y., A simple rule-based approach for detection and classification of voltage sag, swell, and interruption in power systems, International Conference on Power Electronics and Drive Systems, (IEEE PEDS), pp. 5-8, 2011. DOI: 10.1109/PEDS.2011.6147338.
- [12] IEEE. Recommended practice for monitoring electric power quality. IEEE Std 1159, 2009.
- [13] IEC. Electromagnetic compatibility (EMC) Part 4-30: Testing and measurement techniques – Power quality measurement methods, IEC 61000-4-30, 2008.
- [14] IEEE. Recommended practice for the design of reliable industrial and commercial power systems, IEEE Std 493, 2007.
- [15] Bollen, M. and Gu, I., Processing of stationary signals, signal processing of power quality disturbances, 1st ed. New York, USA, Wiley, 2006, pp. 222-226.
- [16] Jacobsen, E. and Lyons, R., The sliding DFT, IEEE Signal Processing Magazine. [online]. 20(2), 2003. [date of reference July 3th 2014]. Available at: <http://ieeexplore.ieee.org/stamp/stamp.jsp?arnumber=01184347>. DOI: 10.1109/MSP.2003.1184347.
- [17] Montero-Hernandez, O.C. and Enjeti, P.N., A Detection algorithm suitable for mitigation of numerous power quality disturbances. IEEE Transactions on Industry Applications [online]. 41(6), 2005. [date of reference July 3th of 2014]. Available at: <http://ieeexplore.ieee.org/stamp/stamp.jsp?tp=&arnumber=1542324>. DOI: 10.1109/IAS.2001.955994.
- [18] Zhao, Y., Yonghai, X., Xiangning, X., Yongqiang, Z. and Chunlin, G., Power quality disturbances identification based on DQ conversion, Wavelet Transform and FFT, Asia-Pacific Power and Energy Engineering Conference (APPEEC), pp. 1-4, 2010. DOI: 10.1109/APPEEC.2010.5448526.
- [19] Djokic, S.Z., Milanovic, J.V. and Rowland, S.M., Advanced voltage sag characterisation II: Point on wave. IET Generation, Transmission & Distribution [online]. 1(1), 2007 [date of reference July 3th of 2014]. Available at: <http://ieeexplore.ieee.org/stamp/stamp.jsp?arnumber=04082380>. DOI: 10.1049/iet-gtd:20050434.
- [20] Mostafa, M.A., Kalman filtering algorithm for electric power quality analysis: Harmonics and voltage sags problems, Large Engineering Systems Conference Power Engineering, pp. 159-165, 2007. DOI: 10.1109/LESCPE.2007.4437371.
- [21] González, M. and Cardenas, V., The kalman filter in power quality – theory and applications, Kalman Filter. 1st ed. USA, InTecch, 2010, pp. 101-125. DOI: 10.5772/9582.
- [22] Perez-Fernandez, E., Nuevo método de detección y análisis en tiempo real de eventos en la tensión de suministro de energía eléctrica empleando un modelo combinado wavelets-filtro de Kalman extendido, Tesis Doctorado en Ingeniería, Departamento de Ingeniería Informática y Electrónica, Universidad de Cantabria, Santander, España, 2006.
- [23] Christy, X., Vedamani, J., and Karthikeyan, S., Wavelet based detection of power quality disturbance - A case study, International Conference on Signal Processing, Communication., Computing and Networking Technologies (ICSCCN), pp. 157-162, 2011. DOI: 10.1109/ICSCCN.2011.6024534.
- [24] Gallego-Tejada, J. and Castro-Aranda, F., Análisis de señales por transformada Wavelet. La Transformada Wavelet aplicada a los sistemas eléctricos de potencia: Estado del Arte. 1st ed. Alemania, Editorial Académica Española, 2011, pp. 40-63.
- [25] Fitzer, C., Barnes, M. and Green, P., Voltage sag detection technique for a dynamic voltage restorer. IEEE Transactions on Industry Applications [online]. 40(1), 2004. [date of reference July 3rd of 2014]. Available at: <http://ieeexplore.ieee.org/stamp/stamp.jsp?tp=&arnumber=1268198>. DOI: 10.1109/TIA.2003.821801.
- [26] Flores-Arias, J., Bellido-Outeiriño, J. y Moreno-Muñoz, A., A fast RMS meter for detecting sag events in household environments, International Conference on Consumer Electronics (ICCE), pp. 321-322, 2014. DOI: 10.1109/ICCE.2014.6776024.
- [27] Parsons, A.C., Grady, W.M. and Powers, E.J., A wavelet-based procedure for automatically determining the beginning and end of transmission system voltage sags, IEEE Power Engineering Society, pp. 1310-1315, 1999. DOI: 10.1109/PESW.1999.747406.
- [28] Distribution test feeders working group, 13-Bus Test Feeder [online]. Available at: <http://ewh.ieee.org/soc/pes/dsacom/testfeeders/>.

J.E. Celis-Montero, received his BSc. in Electrical Engineering in 2009, from the Universidad del Valle, Santiago de Cali, Colombia. He is currently undertaking his PhD. in Electrical and Electronic Engineering at the Universidad del Valle, Cali, Colombia. He has worked as a researcher at the High Voltage Research Group - GRALTA, Universidad del Valle, Cali, Colombia. His research interests focus on power quality, modeling and the simulation of power system transients, transformers, ferroresonance and smart grids.
ORCID: 0000-0003-2488-8238

D. Fernando-Navas, received his BSc. in Electronic Technology in 2002, from the Universidad del Valle, Palmira, Colombia and his BSc. and MSc. in Electrical Engineering in 2009 and 2012 respectively, from the Universidad del Valle, Santiago de Cali, Colombia. He has worked as a

researcher at the Grupo de Investigación en Alta Tensión - GRALTA and has been an active part of the Laboratorio de Alta Tensión at the Universidad del Valle, Cali, Colombia. He is currently an assistant professor in the Faculty of Engineering of the Electric and Electronic Engineering School at the Universidad del Valle (EIEE). His areas of interest are electricity markets, transformers, electrical equipment testing and vegetable oils. He is a member of the Committee 130 - Transformers ICONTEC Colombia.
ORCID: 0000-0002-7316-7368

F. Castro-Aranda, received his BSc. and MSc. in 1992 and 1995 respectively, in Electrical Engineering from the Universidad del Valle, Santiago de Cali, Colombia and his PhD. in 2005 from the Universitat Politècnica de Catalunya, Spain. He is an associate professor at the Electric and Electronic Engineering School at the Universidad del Valle - EIEE (Santiago de Cali, Colombia). His research interests are focused on the areas of insulation coordination and systems modeling for transient analysis using EMTP. He is President of the Committee 130 - Transformers ICONTEC Colombia, and Director of the High Voltage Lab at the Universidad del Valle.
ORCID: 0000-0002-4858-0222



UNIVERSIDAD NACIONAL DE COLOMBIA

SEDE MEDELLÍN
FACULTAD DE MINAS

Área Curricular de Ingeniería
Eléctrica e Ingeniería de Control

Oferta de Posgrados

Maestría en Ingeniería - Ingeniería Eléctrica

Mayor información:

E-mail: ingelcontro_med@unal.edu.co
Teléfono: (57-4) 425 52 64