



Tecnura

ISSN: 0123-921X

Universidad Distrital Francisco José de Caldas

Zuluaga-Ríos, Carlos David; Florián-Ceballos, Daniel Felipe;
Rojo-Yepes, Miguel Ángel; Saldarriaga-Zuluaga, Sergio Danilo
Review of Charging Load Modeling Strategies for Electric Vehicles:
a Comparison of Grid-to-Vehicle Probabilistic Approaches
Tecnura, vol. 25, no. 70, 2021, October-December, pp. 108-125
Universidad Distrital Francisco José de Caldas

DOI: <https://doi.org/10.14483/22487638.18657>

Available in: <https://www.redalyc.org/articulo.oa?id=257070315007>

- How to cite
- Complete issue
- More information about this article
- Journal's webpage in redalyc.org



Scientific Information System Redalyc
Network of Scientific Journals from Latin America and the Caribbean, Spain and
Portugal

Project academic non-profit, developed under the open access initiative

Review of Charging Load Modeling Strategies for Electric Vehicles: a Comparison of Grid-to-Vehicle Probabilistic Approaches

Revisión de estrategias de modelado de la demanda de carga para vehículos eléctricos: una comparación de enfoques *grid-to-vehicle* probabilísticos

Carlos David Zuluaga-Ríos¹, Daniel Felipe Florián-Ceballos², Miguel Ángel Rojo-Yepes³, Sergio Danilo Saldarriaga-Zuluaga⁴

Fecha de Recepción: 02 de agosto de 2021

Fecha de Aceptación: 12 de agosto de 2021

Cómo citar: Zuluaga-Ríos., C.D. Florián-Ceballos., D.F. Rojo-Yepes., M.A. y Saldarriaga-Zuluaga., S.D. (2021). Review of Charging Load Modeling Strategies for Electric Vehicles: a Comparison of Grid-to-Vehicle Probabilistic Approaches. *Tecnura*, 25(70), 108-125. <https://doi.org/10.14483/22487638.18657>

Abstract

Objective: In this paper, different approaches to how the penetration of electric vehicles (EV) can be modeled in power networks are reviewed. The performance of three probabilistic electric vehicle charging load approaches considering four levels of penetration of EV is also evaluated and compared.

Methodology: A detailed search of the state-of-the-art in charging load modeling strategies for electric vehicles is carried out, where the most representative works on this subject were compiled. A probabilistic model based on Monte Carlo Simulation is proposed, and two more methods are implemented. These models consider the departure time of electric vehicles, the arrival time, and the plug-in time, which were conceived as random variables.

Results: Histograms of the demand for charging of electric vehicles were obtained for the three models contemplated. Additionally, a similarity metric was calculated to determine the distribution that best fits the data of each model. The above was done considering 20, 200, 2.000, and 20.000 electric vehicles on average. The results show that, if there is a low penetration of electric vehicles, it is possible to model the EV charging demand using a gamma distribution. Otherwise, it is recommended to use a Gaussian or lognormal distribution if there is a high EV penetration.

Conclusions: A review of the state of the art of the modeling of electric vehicles under a G2V approach is presented, where three groups are identified: deterministic approaches, methods that deal with uncertainty and variability, and data-driven

¹PhD in engineering, MSc in Electrical Engineering, electrical engineer. Professor, Faculty of Engineering, Department of Electrical Engineering, Institución Universitaria Pascual Bravo. Medellín, Colombia. Email: carlos.zuluaga@pascualbravo.edu.co

²Electrical Engineering student. Department of Engineering, Electrical Engineering area, Institución Universitaria Pascual Bravo. Medellín, Colombia. Email: d.florian147@pascualbravo.edu.co

³Electrical Engineering student. Department of Engineering, Electrical Engineering area, Institución Universitaria Pascual Bravo. Medellín, Colombia. Email: m.rojo1057@pascualbravo.edu.co

⁴PhD in engineering, MSc in Electrical Engineering, electrical engineer. Professor, Faculty of Engineering, Department of Electrical Engineering, Institución Universitaria Pascual Bravo. Medellín, Colombia. Email: s.saldarriagazu@pascualbravo.edu.co

methods. Additionally, it was observed that EVCP model 3 and gamma distribution could be appropriate for modeling the penetration of electric vehicles in probabilistic load flow analysis or for stochastic planning studies for active distribution networks.

Funding: Institución Universitaria Pascual Bravo

Keywords: electric vehicle charging demand, Monte Carlo simulation, probabilistic modeling

Resumen

Objetivo: En este artículo se revisan diferentes enfoques sobre cómo modelar la penetración de los vehículos eléctricos (EV) en los sistemas eléctricos de potencia. También se evalúa y compara experimentalmente el desempeño de tres enfoques probabilísticos de demanda de carga de vehículos eléctricos considerando cuatro niveles de penetración de EV.

Metodología: Se realiza una búsqueda detallada del estado del arte de estrategias de modelado de carga de carga para vehículos eléctricos, donde se recopilaron los trabajos más representativos sobre este tema. Se propone un modelo probabilístico basado en la simulación de Monte Carlo y se implementan dos métodos más. Estos modelos tienen en cuenta la hora de salida de los vehículos eléctricos, la hora de llegada y la hora que se conectan a la red, las cuales fueron concebidas como variables aleatorias.

Resultados: Se obtuvieron histogramas de la demanda de carga de los vehículos eléctricos para los tres modelos contemplados. Adicionalmente, se calculó una métrica de similitud para conocer la distribución que mejor se ajusta a los datos de cada modelo. Lo anterior se realizó considerando 20, 200, 2.000 y 20.000 vehículos eléctricos en promedio. Si se tiene una baja penetración de vehículos eléctricos, es posible modelar la demanda de estos usando una distribución gamma. De lo contrario, se recomienda usar una distribución Gaussiana o lognormal si se tiene una alta penetración de EV.

Conclusiones: Se presenta una revisión del estado del arte en el modelado de vehículos eléctricos bajo un enfoque G2V, donde se identificaron tres grupos: los enfoques deterministas, los métodos que tratan la incertidumbre y la variabilidad y los métodos basados en datos. Adicionalmente, se observó que el modelo EVCP 3 y la distribución gamma pueden ser apropiados para modelar la penetración de vehículos eléctricos en análisis de flujo de carga probabilístico o para estudios de planeamiento estocástico en redes de distribución activas.

Financiamiento: Institución Universitaria Pascual Bravo

Palabras clave: demanda de carga de vehículos eléctricos, simulación de Monte Carlo, modelado probabilístico

Table of Contents

	Page
Introduction	110
EV charging load modeling	111
Deterministic approaches	111
Data-driven approaches	111
Uncertainty/variability approaches	113

Electric vehicle charging probabilistic (EVCP) modeling	114
EVCP model 1	115
EVCP model 2	115
EVCP model 3	116
Experimental evaluation	116
Conclusion	120
Funding	121
References	121

INTRODUCTION

Due to the current debate around global warming, many countries have created numerous strategies to combat this issue. One of these strategies is the inclusion or penetration of electric vehicles (EVs) to the power grid ([Alahyari et al., 2019](#)). Nevertheless, the inclusion of this technology to the power grid is not only to fight against global warming; this penetration can also achieve an efficient operation of the power grid ([Alahyari et al., 2019](#)). All of this brings benefits to combat the aforementioned issue. However, this technology introduces new challenges that must be addressed. For example, with the penetration of EVs, it is not only evident that there is an increased electricity consumption in the power grid, along with the introduction of new load variations, but impacts have also been identified on transportation, manufacturing, and the economy ([Li et al., 2019](#)). These impacts depend on when EVs are connected for charging, where they are connected, and at which charging power ([Grahn et al., 2011](#)). Therefore, these factors must be considered in the operation, planning, and analysis of modern power grids such as active distribution networks or grid-connected microgrids ([Alahyari et al., 2019](#)). The penetration of EVs in studies on power network analysis has been widely addressed ([Alahyari et al., 2019](#), [Li et al., 2019](#), [Kongjeen et al., 2019](#)), and it can be supported by following several charging opportunities:

unidirectional charging, bidirectional charging, uncontrolled charging, external charging strategies, and individual charging strategies ([Grahn et al., 2011](#)). Uncontrolled charging (UCC) means that EV users travel and park as they choose and connect their EVs when there is a need to recharge the battery. External charging strategies imply that the charging may somehow be controlled externally, based on the information of the power grid. Finally, individual charging strategies indicate that the individual can be seen within an UCC approach, but also that individuals may adjust their charging behavior based on economic incentives. For example, in the literature, it is commonly assumed that the penetration of EVs is modeled as a UCC unidirectional charging approach, which only considers the power flow in the grid-to-vehicle (G2V) direction. External charging strategies could be based

on either unidirectional or bidirectional charging, which can consider a power flow in the vehicle-to-grid (V2G) direction. From the literature, one comes across reviews that organize their analysis about of EV charging technologies, EVs standards, charging infrastructure, or the impacts on power grid integration. However, there are few studies that focus on analyzing the different methodologies that have emerged using the G2V philosophy. In this article, we review different G2V approaches. Additionally, we perform an experimental comparison with three probabilistic models and evaluate their performance considering four levels of EV penetration.

EV CHARGING LOAD MODELING

Several approaches for modeling EV load have been proposed in the past. According to [Yi & Scofield, 2018](#), we can find, for example, deterministic EV load modeling techniques ([Kongjeen et al., 2019](#)), Monte Carlo simulation approaches (MCS) ([Li & Zhang, 2012](#)), fuzzy methods ([Shahidinejad et al., 2012](#)), hybrid Fuzzy-MCS methods ([Ahmadian et al., 2017](#)) and many other techniques ([Stiasny et al., 2021](#), [Frendo et al., 2020](#)) to model the EV load. In this paper, we intend to classify these methods into three groups: deterministic, data-driven, and uncertainty/variability approaches.

Deterministic approaches

In deterministic EV load modeling, several methods assume that EV parameters are known ([Yi & Scofield, 2018](#)). For example, the available period, the arrival or departure times of vehicles, and the travelling distance are already known or fixed by the power grid operator, that is, EVs can be seen as stationary energy storage ([Yi & Scofield, 2018](#)). On the other hand, it is possible to find studies that have used measurement-based load modeling approaches to estimate the load model for electric vehicle fast-charging stations ([Gil-Aguirre et al., 2019](#)). Basically, the authors estimate the parameters of the ZIP or polynomial load models, minimizing the discrepancy between the real measurement load and the simulated load responses ([Gil-Aguirre et al., 2019](#)). [Kongjeen et al., 2019](#) implemented a modified backward and forward sweep method for analyzing the impact levels from EV load models on the grid based on constant current load and voltage-dependent loads. These deterministic EV load modeling approaches are also known as traditional methods.

Data-driven approaches

Due to the large amount of real-time driving data, by using these deterministic models, it is difficult to accurately capture the driving patterns ([Li et al., 2019](#)). These patterns show the usage behaviors of drivers and directly affect the energy consumption of EVs. Data-driven models are constructed from large historical data to model the underlying realistic EV charging behaviors. Based on these data-driven models, residential EV charging load profiles can be generated with regard to dif-

ferent numbers of households and charging rates. According to [Li et al., 2019](#), these methods should be scalable and flexible frameworks.

Some data-driven methods have been proposed to describe EV charging patterns and analyze EV driving data. For example, data mining methods such as clustering ([Yi & Scoffield, 2018](#), [Li et al., 2019](#)), correlation analysis ([Xydas et al., 2016](#)), stochastic prediction ([Ashtari et al., 2012](#)), and time-series clustering ([Zhou et al., 2017](#)) are commonly employed to examine EV driving data. Specifically, [Zhou et al., 2017](#) developed a time-series clustering with variable weights to analyze the driving cycle of hybrid-electric vehicles. On the other hand, [Yi & Scoffield, 2018](#) used historical residential charging behavior data to construct probability density functions for modeling the charging duration; and then they employed clustering based on the k-nearest neighbors (KNN) algorithm for charging decision-making. ([Li et al., 2019](#)) proposed a two-level clustering model to determine the driving patterns of EVs. They identified five daily driving patterns and four multifaceted driving patterns that affect the daily load curve. However, the authors considered vehicle static parking patterns and did not take weather conditions into account. [Crozier et al., 2019](#) introduced a probabilistic model based on K-means clustering for UCC of EVs to identify three distinct vehicle usage modes in the United Kingdom. However, the cluster number was included as a model parameter. To summarize, data-driven methods have a great potential for nonlinear system prediction, and the EV charging load can be computed considering different numbers of households and charging rates ([Yi & Scoffield, 2018](#)). However, these data-driven approaches have a weak performance against real-time driving data in low dimension. Although many studies mention differences between data-driven and machine learning techniques, we consider that both can be included into data-based approaches. We have found several approaches that use machine learning theory or concepts to model the EV load, charging behaviors, or driving patterns ([Gerossier et al., 2019](#), [Godde et al., 2015](#), [Stiasny et al., 2021](#)). Specifically, [Gerossier et al., 2019](#) modeled the consumption profile of EVs from raw power measurements. From these measurements, the authors detected five kinds of plugs and EV batteries in order to determine the power drawn from the grid and the battery capacity using the random forest algorithm. On the other hand, [Godde et al., 2015](#) proposed an approach for modeling the charging probability of electric vehicles as a Gaussian mixture model (GMM). This GMM comprehensively captures the charging profiles, assuming underlying assumptions about battery capacity, consumption, charging infrastructure, week day, and settlement structure. [Stiasny et al., 2021](#) also used a GMM to distinguish seven aspects with respect to EV load modeling that influence the variables as flows and voltages in the grid. [Frendo et al., 2020](#) proposed a data-driven regression model for predicting the EV charging demand from a large historical dataset of charging processes. ([Arias & Bae, 2017](#)) presented a forecasting model to estimate the EV charging demand using big data technologies. Specifically, the authors performed a cluster analysis to classify traffic patterns, a relational analysis to identify influential factors affecting the traffic patterns, and a decision tree to establish classification criteria, which determines the charging speed and power of an EV.

Uncertainty/variability approaches

After having discussed several deterministic, data-driven, and machine learning approaches, we would like to present the probabilistic, possibilistic, and stochastic methods that have been used to model the EV charging demand. We have decided to name them uncertainty/variability approaches due to the fact that these techniques deal with these two properties (uncertainty and variability) in the EV charging demand modeling process. In many research areas, these two fields are confused about their meaning and use.

In probabilistic methods, it is possible to find many studies that have used individual probabilistic distribution to model the EV charging demand. For example, these studies have employed Gaussian ([Sun *et al.*, 2015](#)), Weibull ([Li & Zhang, 2012](#)), lognormal ([Khoo *et al.*, 2014](#)), exponential distributions ([Khoo *et al.*, 2014](#)), mixed probability distributions (i.e, a mixture of Gaussian distributions) ([Flammini *et al.*, 2019](#)), or non-parametric methods ([Chung *et al.*, 2018](#), [Chen *et al.*, 2020](#)) to determine the EV charging demand. However, the most common and used technique is Monte Carlo Simulation (MCS), which is conducted for a large number of samples generated using the probability density functions from several input variables ([Li & Zhang, 2012](#), [Su *et al.*, 2019](#)). These input variables can be home arrival/departure time, daily travelling distance/EV initial battery SoC, EV type, EV battery capacity, or EV recharge probability ([Su *et al.*, 2019](#)). Many MCS applications can be found in the literature. For example, [Grahn *et al.*, 2011](#) analyzed the impact caused by the EV charging demand based on uncontrolled and controlled charging scenarios on the distribution transformer hot-spot temperature and loss of life by using a thermal model. Similarly, [Tekdemir *et al.*, 2017](#) also evaluated the effects of EVs on distribution grids. The authors used the MCS and Weibull probability distribution to model the EV charging demand, and they also assumed correlated loads on the grid. Under different conditions, [Ul-Haq *et al.*, 2018](#) employed MCS to develop an EV charging pattern model that considers the vehicle class, battery capacity, SoC, driving habit/need, plug-in time, mileage, recharging frequency per day, charging power rate, and dynamic EV charging price. In [Ahmadian *et al.*, 2015](#), a probabilistic approach is proposed to model the EV load demand considering home arrival time, home departure time, deriving distance, nonlinear characteristics of the battery charge, and different vehicle types. The authors used historical information from the National Household Travel Survey to obtain the probability distributions. On the other hand, in possibilistic approaches, we can find that authors such as [Tan & Wang, 2014](#) have proposed a load profile for EVs, which considers the arrival time, departure time, daily distance travelled, and vehicle parameters in order to obtain a stochastic model of driving patterns based on fuzzy logic theory. [Hussain *et al.*, 2019](#) introduced a fuzzy inference mechanism to determine an appropriate charging, discharging, or withholding decision for EVs. This scheme also considers the available power from the smart grid, arrival time, departure time, SoC, and the required stay time of EVs. Ali *et al.* (2017) proposed a hybrid fuzzy-MCS method where the parameters are modeled according to either probabilistic or possibilistic approaches. For example, the travelling distance is modeled using a fuzzy triangular membership function, while the

Table 1. EV charging load modeling summary

Approach	Method		Advantage	Disadvantage
Deterministic	Voltage-Dependent model (Kongjeen <i>et al.</i> , 2019)		Low computational time.	Uncertainty and driving patterns are not considered.
	ZIP models (Gil-Aguirre <i>et al.</i> , 2019)			
Uncertainty/Variability	Probabilistic	Gaussian (Sun <i>et al.</i> , 2015), Weibull (Li & Zhang, 2012), and lognormal (Khoo <i>et al.</i> , 2014) distributions	Uncertainty is appropriately modeled.	They require computational effort, experience, and many input data samples to determine the demand for EVs.
		Beta (Flammini <i>et al.</i> , 2019) and Gaussian (Stiasny <i>et al.</i> , 2021) mixture models		
		A non-parametric kernel density estimation method (Chen <i>et al.</i> , 2020)		
	Stochastic	Markov chain (Sokorai <i>et al.</i> , 2018) and		
		ARIMA (Amini <i>et al.</i> , 2016) and Poisson (Jiang <i>et al.</i> , 2017) processes		
		Queue theory (García-Valle & Vlachogiannis, 2009)		
	Possibilistic	Fuzzy logic method (Shahidinejad <i>et al.</i> , 2012)		
		Fuzzy logic method with MCS (Ahmadian <i>et al.</i> , 2017)		
Data-driven	K-nearest neighbors (Li <i>et al.</i> , 2019)		They concentrate many of patterns associated with the dynamics of the EVs.	They need large amounts of data to generalize the behavior of the demand for EVs.
	Linear regression (Frendo <i>et al.</i> , 2020)			
	Random forest (Gerossier <i>et al.</i> , 2019)			

Source: Authors.

arrival and departure times are modeled by Weibull probability distributions using MCS.

Finally, in uncertainty and variability approaches, different stochastic methods have been applied to model the EV charging demand. In these stochastic methods, we found approaches such as autoregressive integrated moving average (ARIMA) processes (Amini *et al.*, 2016), Markov chains (Sokorai *et al.*, 2018), Poisson processes (Jiang *et al.*, 2017), and queue theory-based Poisson processes (García-Valle & Vlachogiannis, 2009). A summary of these approaches can be seen in Table 1.

ELECTRIC VEHICLE CHARGING PROBABILISTIC (EVCP) MODELING

In cases where the output variables are requested and the system is complex and includes uncertainty, probabilistic models of the system are advantageous to use in order to determine the behavior of some random variables. In our context, probabilistic modeling can be defined as a way of mo-

deling a phenomenon that uses presumed probability distributions of certain input assumptions or variables to compute the involved probability distribution for chosen output variables (Pergler & Freeman, 2010). One way to achieve this probabilistic modeling is using MCS, which is the most commonly used technique for probabilistic modeling. This section presents three MCS-based EVCP models.

EVCP model 1

For model 1, we have considered the model presented by Su *et al.*, 2019, where the authors assumed that the daily travel distance d and the plug-in time t_p of an EV are Gaussian and lognormal random variables. The authors also assumed that the state of charge SOC_{ij} after a daily travel distance (D), can be computed from Equation (1) using the efficiency of battery power in driving cycles in EVs (η), as follows:

$$SOC_{ij} = 1 - \frac{d}{D\eta} \quad (1)$$

For each EV, the authors calculated the charging duration (t_d) to compute the total EV power using Equation (2), which is given by

$$P_{EV} = \sum_{i=1}^5 \sum_{j=1}^N P_{EV_{ij}} \quad (2)$$

where,

$$P_{EV_{ij}} = \begin{cases} P_c & t_p \leq t \leq t_d \\ 0 & \text{other time} \end{cases} \quad (3)$$

where P_c in Equation (3) is the rated charging power, j is the MCS iteration, and i represents the i -th EV in the specific predefined EV fleet, that is, where $i = \{1, 2, 3, 4, 5\}$, which represents private EVs, utility EVs, commercial EVs (taxies), electric goods trucks, and electric buses, respectively.

EVCP model 2

For model 2, we propose an EVCP model that depends on the leaving time from home t_l , the time that the EV user is away from home t_a , and the charging efficiency η of EVs as random variables to compute the energy consumption of EVs. t_l and t_a are modeled by Gaussian distributions, and η is modeled as a uniform distribution. We also consider the five types of EVs, similarly to EVCP model 1. For our model, we approximate the minimum charging duration time t_{mcd} as a function of the initial SOC:

$$t_{mcd}^j = \frac{(\eta - SOC_{ij})C_{ap}}{P_c} \quad (4)$$

where C_{ap} is the battery capacity, and the connecting time t_c and the fully charging time t_{fc} are computed as

$$\begin{aligned} t_c^j &= t_l^j + t_l^j \\ t_{fc}^j &= t_c^j + t_{mcd}^j \end{aligned} \quad (5)$$

From the expressions shown in Equations (4) and (5), the total EV power is calculated from Equations (6) and (7), that is,

$$P_{EV} = \sum_{i=1}^5 \sum_{j=1}^N P_{EV_{ij}} \quad (6)$$

where

$$P_{EV_{ij}} = \begin{cases} P_c & t_p \leq t_{fc}^j \leq t_d \\ 0 & \text{other time} \end{cases} \quad (7)$$

EVCP model 3

The third model was presented by [Ahmadian et al., 2015](#), which we have modified to include the specific predefined EV fleet of the EVCP model 1. For this model, the home arrival time t_a , home departure time t_d , and travelled distance d are Gaussian random variables, and battery efficiency is uniformly distributed. The SOC is initially computed as in Equation (1). The rated charging power P_c is modelled as a nonlinear function of the SOC, where the SOC is recursively calculated as follows:

$$SOC_t = SOC_{t-1} + \frac{100P_c\eta}{C_{ap}} \quad (8)$$

where η represents the efficiency of the EV during driving. Considering the random variables mentioned above and Equation (8), the total EV power is calculated using Equations (9) and (10).

$$P_{EV} = \sum_{i=1}^5 \sum_{j=1}^N P_{EV_{ij}} \quad (9)$$

where

$$P_{EV_{ij}} = \begin{cases} P_c & t_p \leq t \text{ and } SOC_t \leq 100 \\ 0 & \text{other time} \end{cases} \quad (10)$$

EXPERIMENTAL EVALUATION

In this section, we compare the three aforementioned MCS-based EVCP models following the procedure shown in Figure 1. In the EV input data block, we use the information in [Su et al., 2019](#) as the battery capacity, EV types, charging power, and full endurance mileages. On the other hand,

for the sampling process block, we use the parameters of Table 2 to generate samples for all random variables that feed the three MCS-based EVCP models, and then to compute the total EV power. We repeat $N = 5000$ times the procedure shown in Figure 1 to obtain the histogram for the EV electric energy consumption. We adopt some assumptions about how to use the different EV types employed in Su *et al.*, 2019. For example, we consider that 80 % of private EVs are plugged into the power grid from 18 to 7 h, and the remaining 20 % is recharged during working hours, that is, from 9 h to 17 h. We contemplate three penetration scenarios using 20, 200, 2.000 and 20.000 EVs. To determine the number of EVs, we use a Poisson distribution with an expected value λ . For each level of penetration, we consider over 60 % of private EVs, 20 % of utility EVs, 10 % of taxis, 5 % of electric goods trucks, and 5 % of electric buses.

Figure 2 shows the results of the MCS applied to the three EVCP models considering a penetration of 20, 200, 2.000, and 2.0000 expected EVs. Note that the EVCP models 1 and 2 present similar results. On the contrary, EVCP model 3 obtained significant differences in the energy consumption of the EVs. On one hand, we observe that the EVCP models 1 and 2 keep coherence when the number of EVs increases. However, this can only be true if we are analyzing similar EVs. On the other hand, from EVCP model 3, note that the energy consumption gradually changes as the number of vehicles

Table 2. Charging EV parameters for probabilistic modeling (Su *et al.*, 2019). $\mathcal{N}(\mu, \sigma)$ is a Gaussian distribution with parameters μ (mean) and σ (standard deviation); $\mathcal{LN}(\mu, \sigma)$ is the lognormal distribution; and $\mathcal{U}(a, b)$ is a uniform distribution with parameters a and b

EV type	Period	Mode	Prob.	d	EVCP model 1	EVCP model 2		EVCP model 3		
					t_p	t_l	t_a	η	t_a	t_d
Private	9h - 17h	Slow	10	$\mathcal{LN}(3.2, 0.92)$	$\mathcal{N}(9, 0.9)$	$\mathcal{N}(7, 2)$	$\mathcal{N}(10, 2)$	$\mathcal{U}(0.88, 9)$	$\mathcal{N}(9, 0.9)$	$\mathcal{N}(7, 2)$
	18h - 1h	Slow	80		$\mathcal{N}(18.5, 0.1)$				$\mathcal{N}(18.5, 0.1)$	
	9h - 17h	Fast	10		$\mathcal{N}(9, 0.9)$				$\mathcal{N}(9, 0.9)$	
Utility	9h - 17h	Fast	30	$\mathcal{LN}(3.2, 0.92)$	$\mathcal{N}(18.5, 0.1)$	$\mathcal{N}(17, 2)$	$\mathcal{N}(12, 2)$	$\mathcal{U}(0.88, 9)$	$\mathcal{N}(18.5, 0.1)$	$\mathcal{N}(17, 2)$
	18h - 7h	Slow	70		$\mathcal{N}(12, 0.9)$	$\mathcal{N}(6, 2)$			$\mathcal{N}(12, 0.9)$	$\mathcal{N}(6, 2)$
Commercial	0h - 9h	Fast	70	$\mathcal{N}(195.49, 49.99)$	$\mathcal{N}(4, 2.5)$	$\mathcal{N}(16, 2)$	$\mathcal{N}(12, 2)$	$\mathcal{U}(0.73, 9)$	$\mathcal{N}(4, 2.5)$	$\mathcal{N}(16, 2)$
	9h - 16h	Fast	20		$\mathcal{N}(12, 2.5)$	$\mathcal{N}(0, 2)$			$\mathcal{N}(12, 2.5)$	$\mathcal{N}(0, 2)$
	16h - 24h	Fast	10		$\mathcal{N}(18.5, 0.1)$	$\mathcal{N}(9, 0.9)$			$\mathcal{N}(18.5, 0.1)$	$\mathcal{N}(9, 0.9)$
Goods Trucks	0h - 9h	Fast	60	$\mathcal{N}(201.8, 94.42)$	$\mathcal{N}(3, 1.5)$	$\mathcal{N}(12, 2)$	$\mathcal{N}(10, 2)$	$\mathcal{U}(0.73, 9)$	$\mathcal{N}(3, 1.5)$	$\mathcal{N}(12, 2)$
	9h - 24h	Fast	40		$\mathcal{N}(14.5, 2.8)$	$\mathcal{N}(4, 2)$			$\mathcal{N}(14.5, 2.8)$	$\mathcal{N}(4, 2)$
Bus	22h - 7h	Fast	100	$\mathcal{N}(155, 10)$	$\mathcal{N}(22, 0.5)$	$\mathcal{N}(5, 2)$	$\mathcal{N}(12, 2)$	$\mathcal{U}(0.73, 9)$	$\mathcal{N}(22, 0.5)$	$\mathcal{N}(5, 2)$

Source: Authors.


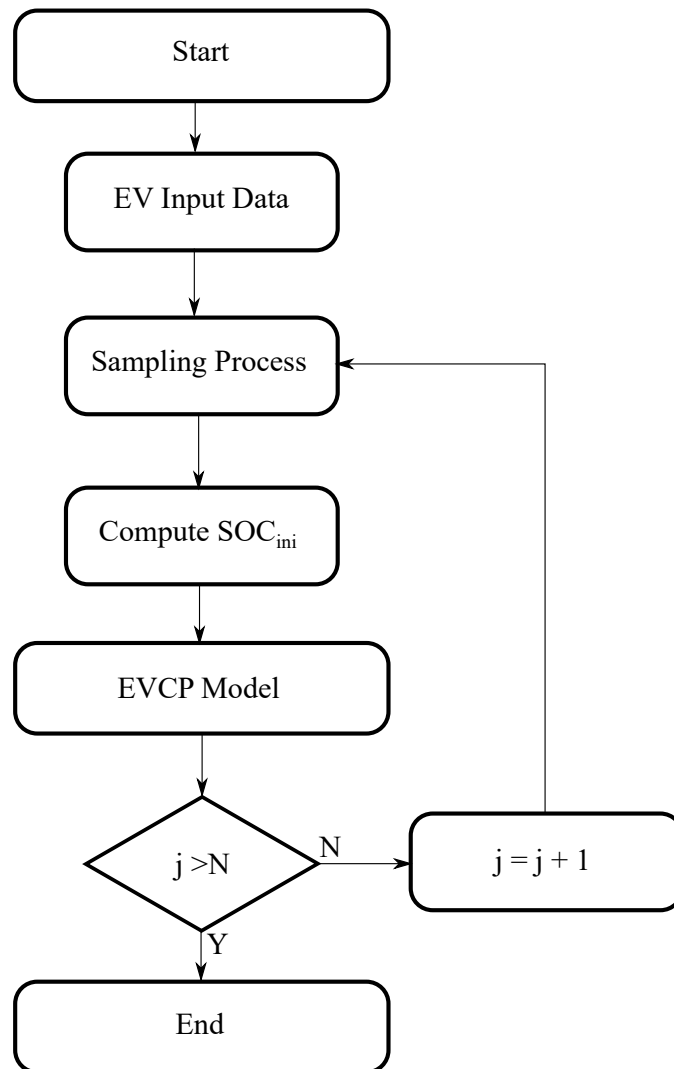


Figure 1. Flowchart for comparing the EVCP Models


Source: Authors.

increases, but it is not consistent between one scenario and the other. From the above, it is necessary to improve EVCP models 1 and 2.


We noticed that one of the great differences of models 1 and 2 with model 3 is that the latter, in addition to considering the non-linear characteristics of the battery charge, ensures that the battery is charged once it is connected to the power grid. From Figure 2, we also noticed that, when there is

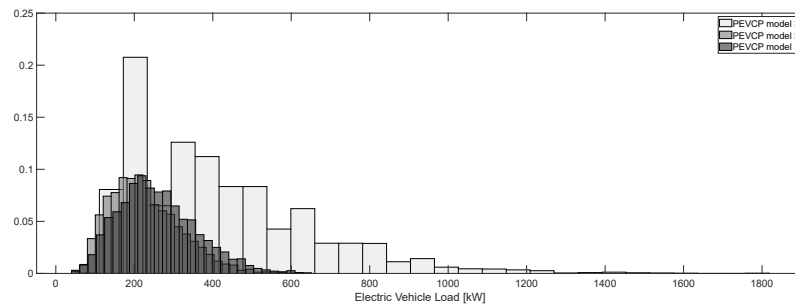


(a) $\lambda = 20$

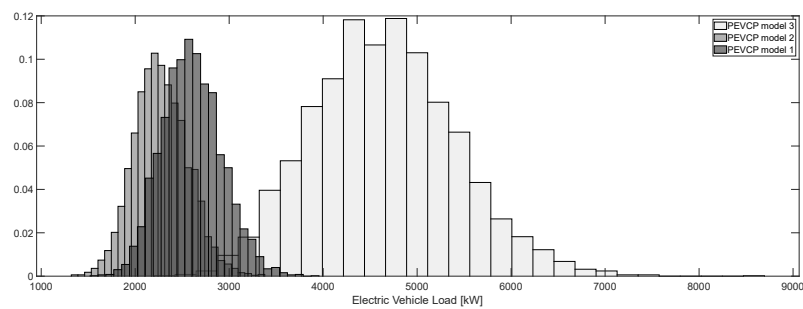

(b) $\lambda = 200$

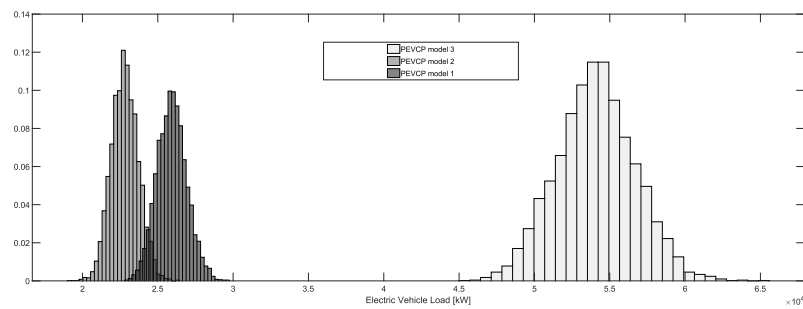

(c) $\lambda = 2,000$

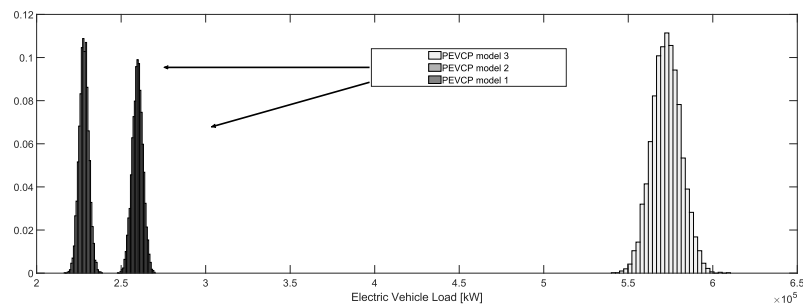

(d) $\lambda = 20,000$

Figure 2. Histograms of the EV charging demand when we apply MCS to the three EVCP models considering a penetration of 20, 200, 2.000, and 20.000 expected EVs

Source: Authors.

Table 3. Wasserstein Distance applied between the real probability distribution and the proposed distribution of the EV demand. As proposed distribution, the gamma, lognormal, Gaussian, and Weibull distributions were analyzed

Distribution	Wasserstein distance			
	20	200	2,000	20,000
<i>Gamma</i>	17,928 ± 3,2997	18,634 ± 2,5456	58,565 ± 2,3555	235,03 ± 47,933
<i>Lognormal</i>	21,463 ± 1,7000	26,194 ± 10,059	60,434 ± 18,760	160,02 ± 42,010
<i>Gaussian</i>	49,735 ± 6,1031	48,164 ± 8,0598	69,243 ± 17,408	169,34 ± 27,718
<i>Weibull</i>	28,133 ± 1,5911	136,55 ± 21,603	545,91 ± 26,603	1913,2 ± 83,372

Source: Authors.

when low EV penetration, the behavior of the energy demand can be modeled using a probability distribution. However, when there is a high penetration of EVs, the probability that best adjusts to the behavior of EV demand can be a Gaussian or lognormal distribution. To this effect, we applied a similarity measure to determine how one probability distribution is different from the other, that is, we computed this distance between the real probability distribution (obtained by MCS) and a proposed distribution. Specifically, we computed the Wasserstein distance (Carrillo & Toscani, 2005) in order to measure the similarity between the true data distribution and some proposed distributions. We analyzed the Gaussian, lognormal, gamma, and Weibull distributions. To compute this distance, we repeated the experiment described above five times using only model 3, that is, we applied five times the procedure shown in Figure 1. From the obtained data, we fit the previously described distributions to the data. Then, we generated samples from these distributions and compared them, using the distance, with the data obtained by applying the MCS of each model. Table 3 shows the Wasserstein distance for modeling the EV demand considering the previous distributions. We particularly noticed that the gamma distribution can be a different modeling alternative for low EV penetration levels. On the other hand, note that the lognormal and Gaussian distributions are adequate options for modeling the demand of EVs when there is a high penetration.

CONCLUSION

A review of the state of the art of the modeling of electric vehicles under a G2V approach was presented, where three groups were identified: deterministic approaches, methods that deal with uncertainty and variability, and data-driven methods. Additionally, an experimental comparison was made with three probabilistic models based on Monte Carlo Simulation. From this comparison, we

observed that EVCP model 3 and the gamma distribution can be appropriate for modeling the penetration of EVs in probabilistic load flow analysis or for stochastic planning studies for active distribution networks. As future works, it would be possible to consider smart charging strategies within these EVCP models, as well as to include more realistic scenarios.

FUNDING

This work was developed within the research project: “Análisis de Microredes de Corriente Continua considerando Vehículos Eléctricos” and it was financed through the Institución Universitaria Pascual Bravo.

REFERENCES

- [Ahmadian *et al.*, 2015] Ahmadian, A., Sedghi, M., & Aliakbar-Golkar, M. (2015, April 28-29). *Stochastic modeling of plug-in electric vehicles load demand in residential grids considering nonlinear battery charge characteristic* [Conference presentation]. 2015 20th Conference on Electrical Power Distribution Networks Conference (EPDC), Zahedan, Iran. <https://doi.org/10.1109/EPDC.2015.7330467> ↑See page 113, 116
- [Ahmadian *et al.*, 2017] Ahmadian, A., Sedghi, M., Elkamel, A., Aliakbar-Golkar, M., & Fowler, M. (2017). Optimal WDG planning in active distribution networks based on possibilistic-probabilistic PEVs load modelling *IET Generation, Transmission and Distribution*, 11(4), 865-875(10). <https://doi.org/10.1049/iet-gtd.2016.0778> ↑See page 111, 114
- [Alahyari *et al.*, 2019] Alahyari, A., Ehsan, M., & Mousavizadeh, M. (2019). A hybrid storage-wind virtual power plant (vpp) participation in the electricity markets: A self-scheduling optimization considering price, renewable generation, and electric vehicles uncertainties. *Journal of Energy Storage*, 25, 100812. <https://doi.org/10.1016/j.est.2019.100812> ↑See page 110
- [Amini *et al.*, 2016] Amini, M. H., Kargarian, A., & Karabasoglu, O. (2016). ARIMA-based decoupled time series forecasting of electric vehicle charging demand for stochastic power system operation. *Electric Power Systems Research*, 140, 378-390. <https://doi.org/10.1016/j.epsr.2016.06.003> ↑See page 114
- [Arias& Bae, 2017] Arias, M. B., & Bae, S. (2016). Electric vehicle charging demand forecasting model based on big data technologies. *Applied Energy*, 183, 327-339. <https://doi.org/10.1016/j.apenergy.2016.08.080> ↑See page 112

- [Ashtari *et al.*, 2012] Ashtari, A., Bibeau, E., Shahidinejad, S., & Molinski, T. (2012). PEV charging profile prediction and analysis based on vehicle usage data. *IEEE Transactions on Smart Grid*, 3(1), 341-350. <https://doi.org/10.1109/TSG.2011.2162009> ↑See page 112
- [Carrillo & Toscani, 2005] Carrillo, J., & Toscani, G. (2005). Wasserstein Metric And Large-Time Asymptotics Of Nonlinear Diffusion Equations. In P. Fergola, F. Capone, M. Gentile, & G. Gue-reiro (Eds.) *New Trends in Mathematical Physics* (pp. 234-244). World Scientific. https://doi.org/10.1142/9789812702319_0022 ↑See page 120
- [Chen *et al.*, 2020] Chen, L., Huang, X., & Zhang, H. (2020). Modeling the charging behaviors for electric vehicles based on ternary symmetric kernel density estimation. *Energies*, 13(7), 1551. <https://doi.org/10.3390/en13071551> ↑See page 113, 114
- [Chung *et al.*, 2018] Chung, Y.-W., Khaki, B., Chu, C., & Gadh, R. (2018, June 24-28). *Electric vehicle user behavior prediction using hybrid kernel density estimator* [Conference presentation]. 2018 IEEE International Conference on Probabilistic Methods Applied to Power Systems (PMAPS), Boise, ID, USA. <https://doi.org/10.1109/PMAPS.2018.8440360> ↑See page 113
- [Crozier *et al.*, 2019] Crozier, C., Morstyn, T., & McCulloch, M. (2019). *A stochastic model for uncontrolled charging of electric vehicles using cluster analysis*. <https://arxiv.org/abs/1907.09458> ↑See page 112
- [Flammini *et al.*, 2019] Flammini, M. G., Prettico, G., Julea, A., Fulli, G., Mazza, A., & Chicco, G. (2019). Statistical characterisation of the real transaction data gathered from electric vehicle charging stations. *Electric Power Systems Research*, 166, 136-150. <https://doi.org/10.1016/j.epsr.2018.09.022> ↑See page 113, 114
- [Frendo *et al.*, 2020] Frendo, O., Graf, J., Gaertner, N., & Stuckenschmidt, H. (2020). Data-driven smart charging for heterogeneous electric vehicle fleets. *Energy and AI*, 1, 100007. <https://doi.org/10.1016/j.egyai.2020.100007> ↑See page 111, 112, 114
- [García-Valle & Vlachogiannis, 2009] García-Valle, R., & Vlachogiannis, J. G. (2009). Letter to the editor: Electric vehicle demand model for load flow studies. *Electric Power Components and Systems*, 37(5), 577-582. <https://doi.org/10.1080/15325000802599411> ↑See page 114
- [Gerossier *et al.*, 2019] Gerossier, A., Girard, R., & Kariniotakis, G. (2019). Modeling and forecasting electric vehicle consumption profiles. *Energies*, 12(7), 1341. <https://doi.org/10.3390/en12071341> ↑See page 112, 114
- [Gil-Aguirre *et al.*, 2019] Gil-Aguirre, J., Perez-Londoño, S., and Mora-Flórez, J. (2019). A measurement-based load modelling methodology for electric vehicle fast-charging stations. *Electric Power Systems Research*, 176, 105934. <https://doi.org/10.1016/j.epsr.2019.105934> ↑See page 111, 114

- [Godde *et al.*, 2015] Godde, M., Findeisen, T., Sowa, T., & Nguyen, P. H. (2015, June 29-July 2). *Modelling the charging probability of electric vehicles as a Gaussian mixture model for a convolution-based power flow analysis* [Conference presentation]. 2015 IEEE Eindhoven Power Tech, Eindhoven, Netherlands. <https://doi.org/10.1109/PTC.2015.7232376> ↑See page 112
- [Grahm *et al.*, 2011] Grahm, P., Rosenlind, J., Hilber, P., Alvehag, K., & Söder, L. (2011, December 5-7). *A method for evaluating the impact of electric vehicle charging on transformer hotspot temperature*. 2011 2nd IEEE PES International Conference and Exhibition on Innovative Smart Grid Technologies, Manchester, UK. <https://doi.org/10.1109/ISGTEurope.2011.6162755> ↑See page 110, 113
- [Hussain *et al.*, 2019] Hussain, S., Ahmed, M. A., & Kim, Y.-C. (2019). Efficient power management algorithm based on fuzzy logic inference for electric vehicles parking lot. *IEEE Access*, 7, 65467-65485. <https://doi.org/10.1109/ACCESS.2019.2917297> ↑See page 113
- [Jiang *et al.*, 2017] Jiang, H., Ren, H., Sun, C., & Watts, D. (2017, September 26-29). *The temporal-spatial stochastic model of plug-in hybrid electric vehicles* [Conference presentation]. 2017 IEEE PES Innovative Smart Grid Technologies Conference Europe (ISGT-Europe), Turin, Italy. <https://doi.org/10.1109/ISGTEurope.2017.8260233> ↑See page 114
- [Khoo *et al.*, 2014] Khoo, Y. B., Wang, C.-H., Paevere, P., & Higgins, A. (2014). Statistical modeling of electric vehicle electricity consumption in the Victorian EV trial, australia. *Transportation Research Part D: Transport and Environment*, 32, 263-277. <https://doi.org/10.1016/j.trd.2014.08.017> ↑See page 113, 114
- [Kongjeen *et al.*, 2019] Kongjeen, Y., Bhumkittipich, K., Mithulananthan, N., Amiri, I., & Yupapin, P. (2019). A modified backward and forward sweep method for microgrid load flow analysis under different electric vehicle load mathematical models. *Electric Power System Research*, 168, 46-54. <https://doi.org/10.1016/j.epsr.2018.10.031> ↑See page 110, 111, 114
- [Li & Zhang, 2012] Li, G., & Zhang, X. (2012). Modeling of plug-in hybrid electric vehicle charging demand in probabilistic power flow calculations. *IEEE Transactions on Smart Grid*, 3(1), 492-499. <https://doi.org/10.1109/TSG.2011.2172643> ↑See page 111, 113, 114
- [Li *et al.*, 2019] Li, X., Zhang, Q., Peng, Z., Wang, A., & Wang, W. (2019). A data-driven two-level clustering model for driving pattern analysis of electric vehicles and a case study. *Journal of Cleaner Production*, 206, 827-837. <https://doi.org/10.1016/j.jclepro.2018.09.184> ↑See page 110, 111, 112, 114
- [Pergler & Freeman, 2010] Pergler, M., & Freeman, A. (2010). *Probabilistic modeling as an exploratory decision-making tool*. McKinsey&Company. <http://www.michaelsamonas.gr/>

[images/Mixalhs/resources/6_Probabilistic_modeling_as_an_exploratory_decisionmaking_tool.pdf](#) ↑See page 115

- [Shahidinejad *et al.*, 2012] Shahidinejad, S., Filizadeh, S., & Bibeau, E. (2012). Profile of charging load on the grid due to plug-in vehicles. *IEEE Transactions on Smart Grid*, 3(1), 135-141. <https://doi.org/10.1109/TSG.2011.2165227> ↑See page 111, 114
- [Sokorai *et al.*, 2018] Sokorai, P., Fleischhacker, A., Lettner, G., & Auer, H. (2018). Stochastic modeling of the charging behavior of electromobility. *World Electric Vehicle Journal*, 9(3), 44. <https://doi.org/10.3390/wevj9030044> ↑See page 114
- [Stiasny *et al.*, 2021] Stiasny, J., Zufferey, T., Pareschi, G., Toffanin, D., Hug, G., & Boulouchos, K. (2021). Sensitivity analysis of electric vehicle impact on low-voltage distribution grids. *Electric Power Systems Research*, 191, 106696. <https://doi.org/10.1016/j.epsr.2020.106696> ↑See page 111, 112, 114
- [Su *et al.*, 2019] Su, J., Lie, T., & Zamora, R. (2019). Modelling of large-scale electric vehicles charging demand: A New Zealand case study. *Electric Power Systems Research*, 167, 171-182. <https://doi.org/10.1016/j.epsr.2018.10.030> ↑See page 113, 115, 116, 117
- [Sun *et al.*, 2015] Sun, K., Sarker, M. R., & Ortega-Vazquez, M. A. (2015, July 26-30). *Statistical characterization of electric vehicle charging in different locations of the grid* [Conference presentation]. 2015 IEEE Power Energy Society General Meeting, Denver, CO, USA. <https://doi.org/10.1109/PESGM.2015.7285794> ↑See page 113, 114
- [Tan & Wang, 2014] Tan, J., & Wang, L. (2014, April 14-17). *Stochastic modeling of load demand of plug-in hybrid electric vehicles using fuzzy logic* [Conference presentation]. 2014 IEEE PES T D Conference and Exposition, Chicago, IL, USA. <https://doi.org/10.1109/TDC.2014.6863179> ↑See page 113
- [Tekdemir *et al.*, 2017] Tekdemir, I. G., Alboyaci, B., Gunes, D., & Sengul, M. (2017). *A probabilistic approach for evaluation of electric vehicles' effects on distribution systems* [Conference presentation]. 2017 4th International Conference on Electrical and Electronic Engineering (ICEEE), Ankara, Turkey. <https://doi.org/10.1109/ICEEE2.2017.7935809> ↑See page 113
- [Ul-Haq *et al.*, 2018] Ul-Haq, A., Cecati, C., & El-Saadany, E. (2018). Probabilistic modeling of electric vehicle charging pattern in a residential distribution network. *Electric Power Systems Research*, 157, 126-133. <https://doi.org/10.1016/j.epsr.2017.12.005> ↑See page 113
- [Xydas *et al.*, 2016] Xydas, E., Marmaras, C., Cipcigan, L. M., Jenkins, N., Carroll, S., & Barker, M. (2016). A data-driven approach for characterising the charging demand of electric vehicles: A UK case study. *Applied Energy*, 162, 763-771. <https://doi.org/10.1016/j.apenergy.2015.10.151> ↑See page 112

- [Yi & Scoffield, 2018] Yi, Z., & Scoffield, D. (2018, June 13-15). *A data-driven framework for residential electric vehicle charging load profile generation* [Conference presentation]. 2018 IEEE Transportation Electrification Conference and Expo (ITEC), Long Beach, CA, USA. <https://doi.org/10.1109/ITEC.2018.8450228> ↑See page 111, 112
- [Zhou *et al.*, 2017] Zhou, W., Xu, K., Yang, Y., & Lu, J. (2017). Driving cycle development for electric vehicle application using principal component analysis and K-means cluster: With the case of Shenyang, China. *Energy Procedia*, 105, 2831-2836. <https://doi.org/10.1016/j.egypro.2017.03.620> ↑See page 112

