

**Revista Internacional de
Contaminación Ambiental**

Revista Internacional de Contaminación Ambiental

ISSN: 0188-4999

claudio.amescua@atmosfera.unam.mx

Universidad Nacional Autónoma de México

México

Carrillo Pedroza, Francisco Raúl; Soria Aguilar, María de Jesús; Sánchez Castillo,
Marco Antonio; Martínez Luévanos, Antonia; Picazo Rodríguez, Nallely Guadalupe

**ADSORPTION OF CHROMIUM FROM STEEL PLATING
WASTEWATER USING BLAST FURNACE DUST**

Revista Internacional de Contaminación Ambiental, vol. 33, no. 4, 2017, November, pp. 591-603

Universidad Nacional Autónoma de México

México

DOI: <https://doi.org/10.20937/RICA.2017.33.04.04>

Available in: <https://www.redalyc.org/articulo.oa?id=37055174006>

- How to cite
- Complete issue
- More information about this article
- Journal's webpage in redalyc.org

UNAM  redalyc.org

Scientific Information System Redalyc

Network of Scientific Journals from Latin America and the Caribbean, Spain and
Portugal

Project academic non-profit, developed under the open access initiative

ADSORPTION OF CHROMIUM FROM STEEL PLATING WASTEWATER USING BLAST FURNACE DUST

Francisco Raúl CARRILLO PEDROZA^{1*}, María de Jesús SORIA AGUILAR¹,
Marco Antonio SÁNCHEZ CASTILLO², Antonia MARTÍNEZ LUÉVANOS³ and
Nallely Guadalupe PICAZO RODRÍGUEZ¹

¹ Facultad de Metalurgia, Universidad Autónoma de Coahuila. Carretera 57, kilómetro 5, Monclova, Coahuila, México, C. P. 25710

² Facultad de Ciencias Químicas, Universidad Autónoma de San Luis Potosí. Avenida Dr. Manuel Nava 6, Zona Universitaria, San Luis Potosí, San Luis Potosí, México, C. P. 78210

³ Facultad de Ciencias Químicas, Universidad Autónoma de Coahuila. Ingeniero J. Cárdenas Valdéz, Colonia República, Saltillo, Coahuila, México, C. P. 25280

*Corresponding author: frcarrillo@yahoo.com.mx

(Received April 2016; accepted April 2017)

Key words: removal, iron oxides, kinetics, low-cost

ABSTRACT

In this work, blast furnace dust (BFD) obtained from a steel dust collector is used as low-cost adsorbent material for chromium removal from steel industrial plating wastewater. This study shows that BFD present physical and chemical characteristics, such as chemical composition, magnetic properties and particle size, suitable for application in adsorption of ions such as chromium. Different kinetics approaches and isotherms models were evaluated to describe the adsorption process. According to results, chromium adsorption follows intra-particle diffusion with adsorption in active sites. Freundlich and Dubinin-Radushkevich isotherms parameter and low free energy obtained from isotherms studies indicate that chromium adsorption occurs by of a cooperative physical adsorption process, due to the electrostatic attraction between protonated FeOH^+ and HCrO_4^- . Although the results indicate that BFD adsorb partially the chromium, it could represent an attractive low-cost absorbent option as complementary method for removal of chromium in the steel plating wastewater treatment.

Palabras clave: remoción, óxidos de hierro, cinética, bajo costo

RESUMEN

En este trabajo se utilizó polvo de alto horno (BFD, por sus siglas en inglés) obtenido de un colector de polvo de acería, como material adsorbente de bajo costo para la remoción de cromo de aguas residuales de la industria del cromado. Este estudio muestra que el BFD tiene características físicas y químicas, tales como su composición química, propiedades magnéticas y tamaño de partícula, que pudieran aplicarse en la adsorción de iones metálicos como el cromo. Para describir el proceso de adsorción de cromo usando BFD fueron evaluados diferentes modelos cinéticos y de isoterma de adsorción. De acuerdo con los resultados, la adsorción de cromo ocurre mediante

difusión intrapartícula y adsorción en sitios activos. Los valores de energía libre y de los parámetros obtenidos de las isothermas de Freundlich y Dubinin-Radushkevich indican que la adsorción del cromo se lleva a cabo por un proceso de adsorción física cooperativa de atracción electrostática entre el ion protonado FeOH^+ y el HCrO_4^- . Aunque los resultados indican que el cromo es adsorbido parcialmente por el BFD, el hecho de que éste sea un material de bajo costo (por ser un residuo de acería) puede representar una opción atractiva complementaria en la remoción de cromo en aguas residuales de la industria del cromado.

INTRODUCTION

Chromium is used in diverse metal products and processes. Some of the main uses of chromium compounds are (a) plastic coatings, (b) electroplating of metals as anti-corrosion agents, (c) leather tanning and finishing, and (d) in pigments and wood preservatives (Mohan et al. 2006). Chromium reaches the environment via leakage, poor storage, or unsafe disposal practices. Naturally occurring chromium is mainly the result of dissolved minerals from weathering of chromites and other chromium bearing minerals present in bedrock and soil (Nriagu et al. 1988). Chromium occurs in wastewater resulting from the previously mentioned processes in both trivalent and hexavalent forms. Chromium (III) is nontoxic when present in trace level but it is mutagenic in 6+ state. Though Cr (III) is not toxic, it can be oxidized to be in toxic form, chromium (VI), in natural waters (Kannan 1995, Ahmed et al. 2013). Cr (VI) is carcinogenic and toxic. The major toxic effects of Cr (VI) are chronic ulcers, dermatitis, corrosive reaction in nasal septum and local effects in lungs (Ghosh 2009). Hexavalent chromium is considered as one of the top 16 toxic pollutants because of its carcinogenic and teratogenic characteristics (Bansal et al. 2009). Effluents from tanning, electroplating, paint and textile industries contain higher hexavalent chromium concentration than the maximum allowable contaminant level (Siboni et al. 2011).

The tolerable levels of hexavalent chromium into the inland surface water and potable water are 0.1 mg/L and 0.05 mg/L respectively (Hsu et al. 2009). To protect the public health, Cr (VI) must be removed from the industrial effluents before discharging into the environment. Using traditional treatment methods, Cr (III) can be treated by precipitating the hydroxide salt at a pH of 9. Traditional treatment techniques are much more complex when treating waste with Cr (VI) or "hex chrome." It must be reduced to Cr (III) before it can precipitate. The reduction process is usually done at a pH of 3 with

sodium bisulfite as the reducing agent, although other reducing agents such as ferrous ion can also be used. Once the chrome is reduced, it can be precipitated as the hydroxide at a pH of 8 to 9 (Nethaji et al. 2013). Adsorption of chromium on different sorbents such as iron, iron oxide, iron coated sand, and iron coated activated carbon (Petrusevski et al. 2002), and granular ferric hydroxides (Driehaus and Jekel 1998) have also been investigated. Naturally occurring ores and minerals, namely kaolinite (Guhab and Chaudhuri 1998), magnetite (Shipley et al. 2009), hematite and maghemite (Tuutijarvi et al. 2009) have also been used for the adsorption of some metal ions though not as extensively as other materials. According to Grosvenor et al. (2004), iron oxide films produced after short oxygen exposure times contain a mixture of magnetite (Fe_3O_4) and maghemite ($\gamma\text{-Fe}_2\text{O}_3$). According to Hu et al. (2004), the metal ion adsorption by magnetite is a combination of electrostatic attraction and ligand exchange at various pH conditions.

The use of mentioned iron-based adsorbents is limited due to high operation cost, sludge formation or technical difficulties in preparation of materials. Recently magnetic separation emerged as a promising environmental purification technique since it produces no contaminants and has the ability to treat large amount of wastewater within a short span of time (Rocher et al. 2004). Since the magnetic particles are superparamagnetic (they are magnetized only at the external magnetic field), they can be recovered very quickly by external magnetic field and reused without losing the active sites (Inbaraj and Chen 2011).

The objective of the present study is to investigate the possible use of blast furnace dust (BFD), an steelmaking wastes, as an alternative adsorbent material for the removal of Cr (VI) from wastewater. Batch experiments are carried out for kinetic studies on the removal of Cr(VI) from aqueous solution. The influence of various important parameters such as time, adsorbent amount, and initial Cr (VI) concentration are investigated. Many kinetic models were

studied and the Langmuir, Freundlich, Tempkin and Dubinin–Radushkevich models are used to fit the experimental equilibrium isotherm data obtained in this study.

EXPERIMENTAL PROCEDURE

Chromium removal tests

Two type of chromium solutions samples was used in the adsorption tests: First, synthetic solution (or synthetically prepared electroplating effluent) was prepared using a chromium (IV) atomic absorption standard solution (Aldrich, 1000 mg/L Cr in nitric acid) and softened tap water (free carbonates), Fe total = 1 mg/L and SO_4^{2-} = 200 mg/L. Chromium concentration from 1 to 12 mg/L was using to adsorption tests. Initial pH of 3 was fixed with HNO_3 analytical grade reactive. At this pH, the most stable specie of chromium is Cr (VI) as HCrO_4^- ions, according to the species distribution diagram showed in **figure 1**. Second solution samples were obtained from steel plating industry wastewater, containing 700 mg/L of chromium (as chromic acid), Fe total = 50 mg/L and SO_4^{2-} = 400 mg/L, at pH = 3. Similarly, **figure 1** indicates that stable chromium species in the wastewater solution is Cr (VI) as HCrO_4^- ions at the solution pH.

Batch tests were performed to remove chromium from the synthetic and electroplating effluent solutions. The batch experiments were carried out in 200 mL

borosil conical bottles. A specific amount of BFD was added in 100 mL of aqueous Cr(VI) solution, and then stirred for a predetermined period (found out from the kinetic studies) at 25 °C. Afterwards, the resultant solution was filtered using a filter paper. Test time, amount of BFD and chromium concentration parameters were studied in these experiments. Chromium determination in solutions after and before adsorption tests was carried out by atomic absorption spectroscopy (AAS, Perkin Elmer 3100).

The amount of Cr (VI) adsorbed by the sawdust and the percentage removal of Cr (VI) were calculated using the following equations (1) and (2), respectively:

$$qe = \frac{(C_0 - C_e)V}{W} \quad (1)$$

$$Cr_{\text{adsorbed}}, \% = \frac{C_i - C_0}{C_i} \times 100 \quad (2)$$

where, qe is the adsorption capacity in mg/g, C_i , C_0 and C_e are the initial, outlet and equilibrium concentration of Cr (VI) in mg/L, V is the volume of Cr (VI) solution in mL and W is the total amount of adsorbent in g.

BFD characterization

Industrial BFD samples were collected from a dust collector system installed in a steelmaking plant. The chemical and physical characteristics are detailed and discussed in previous work (Carrillo-Pedroza et al. 2014). A resume of the main characteristics is showed in **table I**. As can be seen in the table, BFD have a specific surface area value of 21.7 m²/g. This value is in the same order that the values reported in literature for different iron oxides, as showed in **table II**. On the other hand, the isoionic point (IIP) value of 5 for BFD indicated that the protonation of BFD surface is enhanced at pH lower than IIP (positive surface charge), while deprotonation is promoted at pH greater than IIP (negative surface charge). Comparing, literature reports IIP of 3.1 for blast furnace sludge (Lopez-Delgado et al. 1998), and pH_{ZPC} for magnetite of 6.4 to 6.7 (Mamindy-Pajany et al. 2011, Chowdhury et al. 2012), respectively. Finally, the values of the magnetic properties of BFD indicated in **table I** are similar at the values observed in magnetite mineral, soft ferrites and synthetic magnetite (Shipley et al. 2009, Ahmed et al. 2013, Nethaji et al. 2013). This feature is very important for some applications where post-adsorption magnetic recovery of these materials would be required.

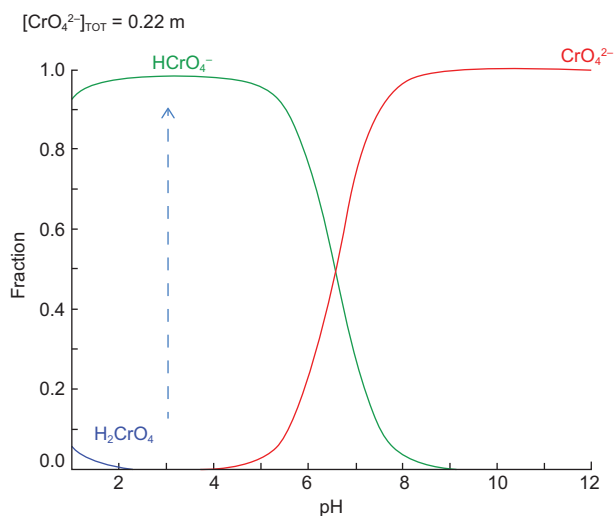


Fig. 1. Chromium species distribution in aqueous solution. Modeling with medusa software for $[\text{Cr}]_{\text{solution}} = 12 \text{ mg/L}$, at 1 atm and 25 °C

TABLE I. MAIN CHEMICAL AND PHYSICAL CHARACTERISTIC OF BLAST FURNACE DUST SAMPLES

Chemical composition						
Main element or compound (% wt)	SiO ₂	CaO	MgO	Fe	C	Zn
	3.10	12.94	3.36	41.55	3.94	1.4
Phases, %, (X-ray diffraction; PDF is the patron diffraction file)						
Zero valent iron (Fe) PDF 6-696	Wustite (FeO) PDF 89-2468		Magnetite (Fe ₃ O ₄) PDF 19-629			
40	35		15			
Size particle	Isoionic point	Specific surface area.	Magnetic properties.			
88%-44μ (by wet sieve analysis)	< 500 nm (by Scannig electronic microscopy)	5	21.7 m ² /g	Remanent magnetization (Rm) 7 memu Magnetic saturation (Ms) 69.93 to 78.99 memu Coercive force (Cf) 20 to 128 Oe		

TABLE II. SPECIFIC SURFACE AREA VALUES (BY BRUNAUER-EMMETT-TELLER METHOD) FOR DIFFERENT IRON OXIDES

Adsorbent	(m ² /g)	Reference
Commercial 20–60 nm ‘magnetite’ particles (Reade Advanced Materials)	49	Dakiky et al. 2002
Magnetite sinthetized by microwave-assistant citrate	47.9	Mamindy-Pajany et al. 2011
Magnetite sinthetized by glycine–nitrate	9.8	Mamindy-Pajany et al. 2011
Magnetite sinthetized by citrate–nitrate	13.4	Mamindy-Pajany et al. 2011
Fe ₂ O ₃ from Basic Oxygen Furnace clarified sludge	78.54	López-Delgado et al. 1998
Blast furnace dust (BFD)	21.7	this work

RESULTS AND DISCUSSION

Adsorption kinetics

To understand the sorption mechanism of Cr (III) on BFD, the kinetic data were fitted into different models reported in literature (Badruddoza et al. 2013, Li et al. 2013, Nethaji et al. 2013, Oladoja et al. 2013). A brief description of the kinetics model is mentioned as follow.

The pseudo-first order kinetic model is based on the Lagergren equation, represented as:

$$\frac{dq}{dt} = k_1 (q_e - q_t) \quad (3)$$

where q_t and q_e (mg/g) are the amount of solute adsorbed at time t (min) and at equilibrium, respectively.

The first order rate constant for kinetic model is k_1 (min^{-1}). The model describes the kinetic process of the liquid-solid phase adsorption.

The pseudo-second order kinetic model is described by the following equation,

$$\frac{d_t}{dt} = k_2(q_e - q_t)^2 \quad (4)$$

In this equation, the driving force ($q_e - q_t$) is proportional to the available fraction of actives sites and k_2 is the second order rate constant.

Intraparticle diffusion model assume that adsorption by internal diffusion or intraparticle diffusion is the rate-controlling step. This model is given by the equation (5):

$$q_t = k_{id}t^{1/2} \quad (5)$$

where k_{id} is the intraparticle diffusion rate constant. The plot q_t against $t^{1/2}$ represents the different steps of adsorption: external or film diffusion, intraparticle diffusion and adsorption in active sites or mass action. Then, the linear portion of the curve q_t versus $t^{1/2}$ represents the intraparticle diffusion. The slope yields the intraparticle diffusion rate constant k_{id} and the intercepts reflects the boundary layer (BL) effect. The bigger the intercept, the greater is the contribution of the surface sorption to the rate-controlling step.

Finally, the Elovich equation. This model is used to described the kinetics of chemisorption of a gas. The equation is expressed as:

$$\frac{dq_t}{dt} = \alpha e^{-\beta q_t} \quad (6)$$

where b is the desorption constant and a the initial adsorption rate.

The results obtained from the different models are summarized in **table III**. It can be seen that the correlation coefficient of pseudo-second-order and intraparticle models ($r^2 = 0.997$ and 0.984 , respectively) are much higher than the other models. Therefore, that the adsorption kinetics follow intraparticle and pseudo-second-order models could suggest intra-particle diffusion with adsorption in active sites. In the initial stages of adsorption of Cr (VI), the concentration gradient between the film and the available pore sites is large, and hence the rate of adsorption of Cr (VI) is faster. The rapid adsorption of chromium by BFD can be attributed to external surface adsorption. It is easy for chromium access to active adsorption sites, thus resulting in a rapid uptake of chromium. The rate of adsorption decreases in the later stages of Cr (VI) adsorption probably due to the slow pore diffusion of the solute ion into the bulk of the adsorbent.

TABLE III. KINETIC PARAMETERS OF THE DIFFERENT MODELS ANALYSIS OF SORPTION OF Cr (VI) ON BLAST FURNACE DUST. CORRELATION COEFFICIENT = r^2

Kinetic model	Parameters		r^2
pseudo-1st order	Amount of solute adsorbed at equilibrium, q_e	First order rate constant, k_1	0.45
	2.852	0.03	
pseudo-2nd order	Amount of solute adsorbed at equilibrium, q_e	Second order rate constant, k_1	0.997
	0.1023	13.5	
intraparticle diffusion	Boundary layer (BL) effect	Intraparticle diffusion rate constant, k_{id}	0.984
	0.1465	0.0498	
Elovich equation	Initial adsorption rate, α	Desorption constant, β	0.852
	0.065354	20.4499	

Adsorption isotherm study

In order to have a best understanding of the phenomenon of adsorption that occurs between chromium and BFD, different adsorption isotherm models were analyzed. The Langmuir, Freundlich, Tempkin and Dubinin-Radushkevich adsorption isotherm equations were used to interpret the nature of chromium adsorption on BFD samples. **Table IV** shows the isotherm parameter from chromium adsorption in synthetic and industrial plating wastewater solution samples, respectively. The table also shows the error functions used to define the best-fitting relationship (Foo and Hameed 2010). Error functions, as correlation coefficient (r^2), sum square error (SEE), sum

of absolute errors (SAE) and average relative error (ARE) are widely described in literature (Ng et al. 2003, Kumar and Sivanesan 2006, Karadag et al. 2007, Mane et al. 2007).

Figures 2 and 3 show the comparative curves of the isotherm models that have a major adjust to experimental data, according to error functions. The results and the isotherm models are described and analyzed below. Langmuir adsorption isotherm describes quantitatively the formation of a monolayer adsorbate on the outer surface of the adsorbent, and after that no further adsorption takes place (Langmuir 1916, De Boer 1968). Thereby, the Langmuir isotherm represents the equilibrium distribution of metal

TABLE IV. ISOTHERM PARAMETERS AND ERROR FUNCTIONS FROM THE SORPTION OF Cr (VI) ON BLAST FURNACE DUST FOR SYNTHETIC SOLUTION

Synthetic solution						
Isotherm model	Parameter	value	Correlation coefficient, r^2	Sum square error	Sum of absolute error	Average relative error
Freundlich	Adsorption intensity, n	0.9013	0.960	0.0032	0.0329	1.535
	Freundlich isotherm constant, K_f	0.0251				
Langmuir	maximum monolayer coverage capacity, Q_0	4.16	0.949	0.0006	0.0446	0.647
	Langmuir isotherm constant, K_L	0.006				
	Separation factor, R_L	0.508				
Tempkin	Tempkin isotherm equilibrium binding constant, AT	1.372	0.894	0.00111	0.0696	1.762
	Constant related to heat of sorption, B	0.0686				
Dubinin-Radushkevich	Dubinin – Radushkevich isotherm constant, K_{ad}	4.38E -07	0.782	0.0029	0.1044	0.044
	Theoretical isotherm saturation capacity, q_s	0.1107				
	Free energy per molecule of sorbate, E	1.068				

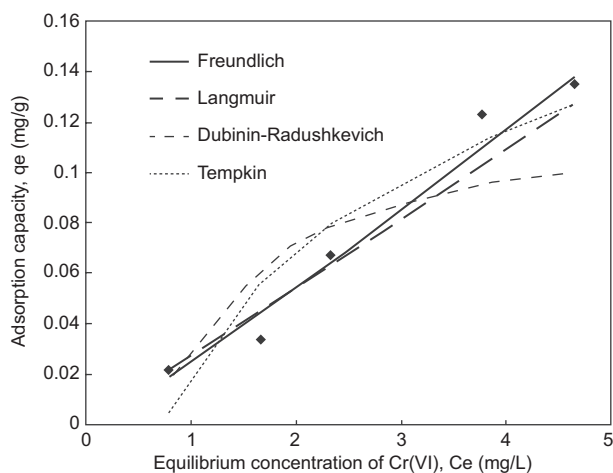


Fig. 2. Plot of equilibrium experimental data and calculated equilibrium data using different isotherm models for the adsorption of Cr (VI) onto blast furnace dust (BFD), for synthetic solution with a initial Cr (VI) concentration of 5 mg/L, temperature 25 °C, initial pH 3

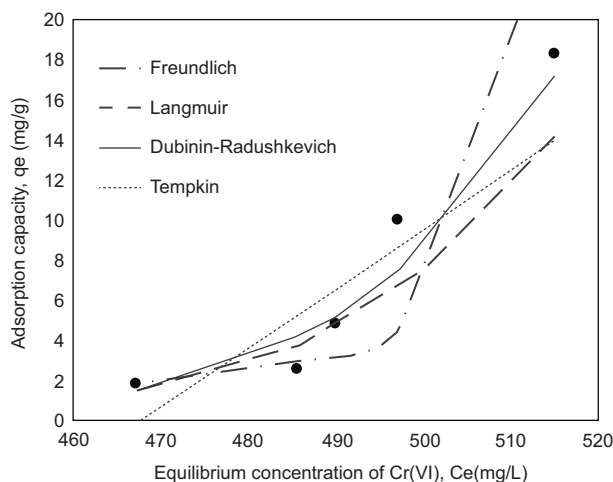


Fig. 3. Plot of equilibrium experimental data and calculated equilibrium data using different isotherm model for the adsorption of Cr (VI) onto blast furnace dust, for industrial steel plating wastewater solution with a initial Cr(VI) concentration of 700 mg/L, temperature 25 °C, initial pH 3

ions between the solid and liquid phases (Kundu and Gupta 2006, Vijayaraghavan et al. 2006). The Langmuir isotherm is valid for monolayer adsorption onto a surface containing a finite number of identical sites. The model assumes uniform energies of adsorption onto the surface and no transmigration of adsorbate in the plane of the surface (Demirbas et al. 2008). Based upon these assumptions, Langmuir isotherm is represented by the following equation:

$$q_e = \frac{Q_0 K_L C_e}{1 + K_L C_e} \quad (7)$$

where:

C_e = the equilibrium concentration of adsorbate (mg/L)

q_e = the amount of metal adsorbed per gram of the adsorbent at equilibrium (mg/g).

Q_0 = maximum monolayer coverage capacity (mg/g)

K_L = Langmuir isotherm constant (L/mg).

A dimensionless constant, commonly known as separation factor (R_L) defined by Webber and Chakravorti (1974) can be represented as:

$$R_L = \frac{1}{1 + (K_L C_0)} \quad (8)$$

where:

C_0 = initial concentration

K_L = the constant related to the energy of adsorption (Langmuir Constant).

R_L value indicates the adsorption nature to be either unfavorable if $R_L > 1$, linear if $R_L = 1$, favorable if $0 < R_L < 1$ and irreversible if $R_L = 0$. From the data calculated in **table IV** and **table V**, the R_L value, 0.508, is greater than 0 but less than 1 indicating that Langmuir isotherm is propitious. In this work, for synthetic solutions, the maximum monolayer coverage capacity (Q_0) from Langmuir isotherm model was determined to be 4.16 mg/g, K_L is 0.006 L/mg and the r^2 value is 0.956 proving that the sorption data fitted well to Langmuir isotherm model. In the case of industrial plating wastewater solutions, the Langmuir parameters values obtained were $Q_0 = 0.212$ mg/g and $K_L = 0.0019$ L/mg ($r^2 = 0.887$) and $R_L = 1.51$. This last value indicates an unfavorable or very limited adsorption. Possibly due to high concentration of sulphate and Fe ions in the wastewater solution.

Freundlich adsorption isotherm is commonly used to describe the adsorption characteristics of heterogeneous surfaces (Freundlich 1906, Hutson and Yang 2000). These data often fit the empirical equation proposed by Freundlich:

$$q_e = K_f C_e^{\frac{1}{n}} \quad (9)$$

where K_f = Freundlich isotherm constant (mg/g)

n = adsorption intensity;

C_e = the equilibrium concentration of adsorbate (mg/L)

The constant K_f is an approximate indicator of adsorption capacity, while $1/n$ is a function of the strength of adsorption in the adsorption process. If $n = 1$, then the partition between the two phases is independent of the concentration. If value of $1/n$ is

TABLE V. ISOTHERM PARAMETERS AND ERROR FUNCTIONS FROM THE SORPTION OF Cr (VI) ON BLAST FURNACE DUST FOR INDUSTRIAL STEEL PLATING WASTEWATER SOLUTION

Industrial steel plating wastewater solution						
Isotherm model	Parameter	value	Correlation coefficient, r^2	Sum square error	Sum of absolute error	Average relative error
Freundlich	Adsorption intensity, n	0.044	0.801	40.97	12.33	1.85
	Freundlich isotherm constant, K_f	1.2E-60				
Langmuir	maximum monolayer coverage capacity, Q_0	0.212	0.887	79.46	14.26	1.39
	Langmuir isotherm constant, K_L	0.0019				
	Separation factor, R_L	1.511				
Tempkin	Tempkin isotherm equilibrium binding constant, AT	0.00213	0.663	61.73	15.98	3.73
	Constant related to heat of sorption, B	149.22				
Dubinin-Radushkevich	Dubinin – Radushkevich isotherm constant, K_{ad}	0.486	0.895	9.91	5.88	3.91
	Theoretical isotherm saturation capacity, q_s	13092				
	Free energy per molecule of sorbate, E	0.001				

below one it indicates a normal adsorption. On the other hand, $1/n$ being above one indicates cooperative adsorption (Mohan and Karthikeyan 1997, Haghseresht and Lu 1998). From the data in **tables IV** and **V**, $n = 0.9013$, therefore $1/n = 1.11$ for synthetic solutions ($r^2 = 0.966$), while the value of $n = 0.044$ ($1/n = 22.5$) for industrial plating wastewater solution ($r^2 = 0.801$). The r^2 and $1/n$ values obtained in the adsorption of chromium in synthetic and industrial solution are indicative of a cooperative adsorption process.

The Tempkin isotherm contains a factor that explicitly takes into account adsorbent-adsorbate interactions. The model assumes that heat of adsorption (function of temperature) of all molecules in the layer

would decrease linearly rather than logarithmic with coverage (Tempkin and Pyzhey 1940, Aharoni and Ungarish 1977). The model is given by the equation 10. From plotting the quantity sorbed q_e vs $\ln C_e$, the constants are determined from the slope and intercept.

$$q_e = \frac{RT}{b} \ln(A_T C_e) \quad (10)$$

where:

A_T = Tempkin isotherm equilibrium binding constant (L/g)

b = Tempkin isotherm constant

R = universal gas constant (8.314 J/mol/K)

T = temperature at 298K.

$B = RT/b$, constant related to heat of sorption (J/mol)

From the Tempkin plot, the following values were estimated (**Tables IV and V**): $A_T = 1.372$ L/g, $B = 0.0686$ KJ/mol ($r^2 = 0.894$) and $A_T = 0.00213$ L/g, $B = 149.22$ KJ/mol ($r^2 = 0.667$), for synthetic and industrial plating wastewater, respectively. The low B value obtained in synthetic solution is an indication of the heat of sorption for a physical adsorption process. In the case of B value for industrial plating wastewater solution, this value cannot be considered representative due to the low r^2 and the high SEE and SAE error function values.

The fourth isotherm model used in this work was the Dubinin–Radushkevich isotherm (Dubinin and Radushkevich 1947, Dubinin 1960). The model has been successfully fitted high solute activities and the intermediate range of concentrations data as well.

$$qe = (qs) \exp(-K_{ad} \varepsilon^2) \quad (11)$$

where:

qs = theoretical isotherm saturation capacity (mg/g)
 K_{ad} = Dubinin–Radushkevich isotherm constant (mol²/kJ²)

ε = Dubinin–Radushkevich isotherm constant.

The model is usually applied to distinguish the physical and chemical adsorption of metal ions with its mean free energy (E), per molecule of sorbate, which can be computed by the relationship (Hobson 1969):

$$E = \left[\frac{1}{\sqrt{2B_{DR}}} \right] \quad (12)$$

where B_{DR} is denoted as the isotherm constant. Meanwhile, the parameter ε can be calculated as:

$$\varepsilon = RT \ln \left[1 + \frac{1}{Ce} \right] \quad (13)$$

where R , T and Ce represent the gas constant (8.314 J/mol K), absolute temperature (K) and adsorbate equilibrium concentration (mg/L), respectively.


From the linearized form of equations (11) and (12), qs was determined as 0.1107 mg/g and the mean free energy as $E = 1.068$ KJ/mol ($r^2 = 0.871$) for synthetic solution, whereas for industrial plating solution qs was determined as 13092 mg/g and the mean free energy to $E = 0.001$ KJ/mol ($r^2 = 0.895$). In the case of industrial plating wastewater solutions, the experimental data fit better at Dubinin–Radushkevich isotherm model than the other models, as is indicated in three of four error functions showed in

tables IV and V. Therefore, the low free energy value is well indicative of a physical adsorption process for the industrial plating wastewater solution.


As was mentioned, Cr (VI) is found as H_2CrO_4 . In solution, Cr (VI) is found as CrO_4^{2-} , $HCrO_4^-$ or $Cr_2O_7^{2-}$, depending on both pH of the medium and total Cr (VI) concentration. For industrial plating wastewater, at $pH > 1$, deprotonated forms of Cr (VI) are seen. Above pH 7 only CrO_4^{2-} ions exist in solution throughout the concentration range. In the pH between 1 and 6, $HCrO_4^-$ is predominant (Chowdhury et al. 2012). The anion adsorption sites on the BFD are aquo-groups ($-Fe-OH_2^+$) and hydroxide groups ($Fe-OH$). The surface chemistry of such sorbents, in contact with an aqueous solution is determined, to a large extent, by deprotonation or a hydroxyl association reaction, according to the following reactions:



The reaction represented in equation 14 occurs preferably at a low pH, while the reaction indicated by equation 15 occurs at a higher pH range. In our case ($pH = 3$), anion $HCrO_4^-$ can be absorbed by the positive charged surface due to the product reaction of equation (14). Then, iron zero valent-magnetite-wustite particles from BFD may adsorb either negatively or positively charged species by electrostatic attraction depending on pH of the solution. From the measured zeta potential of BFD at different pH values, the isoelectric point (IEP) value of the used material was 5. Then, at low pH (synthetic and industrial solutions $pH = 3$), the iron phases observed in **table II** react with the chromium acid solution to form $FeOH^+$ in the BFD particle surface, according to the following reactions, where Gibbs free energies were calculated from HSC Chemistry software V5.1 (Roine 2002):



The positively charged BFD surface attracts and reacts with the $HCrO_4^-$ ions to form Cr_2FeO_4 , according to:



Then, the sorption of chromium (VI) using BFD is first governed by diffusion followed by surface compound formation (in accordance to equation 19). According to Ho and McKay (1999) review, the pseudo-first order rate equation of Lagergren can be used as a rate equation in adsorption kinetics as a chemical phenomenon and a diffusion equation for diffusion through a boundary liquid film.

The results shows that BFD adsorbent removes up to 50 % and 35 % of chromium in synthetic electroplating solution and industrial plating wastewater solution, respectively. It may be due to pH and interference of other ions present in solutions (not determined in the present study). According to Dakiky et al. (2002) and Bhattacharya et al. (2008), increasing the pH will shift the concentration of HCrO_4^- to $\text{Cr}_2\text{O}_7^{2-}$ and other forms as CrO_4^{2-} . Maximum adsorption at pH below 3 indicates that it was the HCrO_4^- form of Cr (VI), the predominant species at this pH range and adsorbed preferentially on the adsorbent. Better adsorption capacity observed at pH 3 may be attributed to the large number of H^+ ions present at this pH value, which in turn neutralize the negatively charged hydroxyl groups (OH^-) on adsorbed surface thereby reducing the hindrance to the diffusion of dichromate ions. On the other hand, some studies indicate that various kinds of anions in industrial and groundwater, such as chloride, sulfate and nitrate, may lead to competitive adsorption (Badrudodoza et al. 2013). As per the results reported by Babu and Gupta (2008) and Gupta and Babu (2009),

the percentage removal of Cr (VI) is significantly affected by the presence of SO_4^{2-} in the industrial effluent. In their studies, synthetic solution with chemical composition such to the electroplating industry and the tannery industry effluents were treated with the sawdust, which resulted in a decrease in the percentage removal from 96 % to 55.4 % and 96% to 50.25 % respectively. Their results show that the adsorbent capacity for Cr (VI) removal is decreased approximately by 50 % for the synthetic electroplating and tannery effluents. These values are very similar at present study. Then, the high SO_4^{2-} content in plating solutions decrease the Cr (IV) remove due at competitive ion adsorption by electrostatic attraction between the negatively charged species by in the positive charged BFD surface, according to the following reaction:



Then, the reducing of H^+ ions to form FeOH^+ (equations 16 and 17) and the presence of sulphate ions could be decreasing the diffusion of dichromate ions to BFD particle surface, explaining the low adsorption observed in the results.

However, in spite of the results in terms of adsorption efficiency, the adsorption capacity obtained (0.14 mg/g for a 5 mg/L Cr (VI)) synthetic solution, and 18 mg/g for 515 mg/L Cr (VI) industrial solution) is comparable with some of the low cost adsorbents reported in the literature, which are indicated in **table VI**. Considering that BFD is a material that is obtained in the same integrated steelmaking industry

TABLE VI. ADSORPTION CAPACITIES OF SOME LOW COST ADSORBENTS FOR Cr (VI)

Adsorbent	Adsorption capacity (mg/g)	Reference
Rice husk	0.79 – 45.6	Barakat (2011), Babel and Kurniawan (2003)
Chitosan	50 – 273	Babel and Kurniawan (2003), Kurniawan (2006)
Zeolites	2.40 – 3.60	Babel and Kurniawan (2003), Kurniawan (2006)
Fly ash	0.31 -2.92	Babel and Kurniawan (2003), Kurniawan (2006)
Aluminium oxide	11.7	Babel and Kurniawan (2003)
Iron (III) hydroxide	0.47	Babel and Kurniawan (2003)
Blast furnace slag	7.5	Babel and Kurniawan (2003)
Blast furnace sludge	9-12.06	López Delgado et al (1998)
Activated red mud	1.6 – 35.66	Babel and Kurniawan (2003), López Delgado et al (1998)
Diatomite	1.68	Babel and Kurniawan (2003)
Sawdust	2.29	Babel and Kurniawan (2003)
Granular activated carbon	0.18 -53.19	Babel and Kurniawan (2003), Kurniawan (2006)
Oxide titanium	30	Kurniawan (2006)
Carbon anode dust	4.29	Višekruna et al. (2011)
Blast furnace dust	0.14 - 18**	This work

** values for synthetic solution (5 mg/L Cr (VI)) and industrial solution (515 mg/L Cr(VI))

where plating wastewater is also generated, the high availability of BFD makes this material the most attractive low cost adsorbent for these type of industry.

CONCLUSIONS

Crm(VI) from industrial wastewater streams is investigated. BFD is found to be a optional adsorbent for the removal of Cr (VI) as compared to many other low-cost and commercially available adsorbents. According to kinetic study, the rapid adsorption of chromium by BFD can be attributed to the external surface adsorption; after, adsorption decrease probably due to the slow pore diffusion of the solute ion into the bulk of the adsorbent. The equilibrium adsorption data were best fitted (according different error functions) with Freundlich isotherm model and Dubinin–Radushkevich for synthetic solution and industrial plating wastewater, respectively. This results confirms the physical adsorption of Cr (VI) onto the BFD. The presence of other ions such as SO_4^{2-} in aqueous solutions are found to have significant effect on Cr (VI) adsorption. However, the low percentage value of 35 % for adsorption of Cr (VI) in industrial plating wastewater can be sufficient to make significant savings in the actually most common process of removal of chromium such as is the reduction-precipitation. Additionally, the low cost of BFD and their magnetic properties (to facilitate its recovery), expands the scope of their possible applications as complementary Cr (VI) remove method in the industrial plating wastewater treatment process.

ACKNOWLEDGMENTS

The authors would like to thank to International Center for Nanotechnology and Advanced Materials - Kleberg Advanced Microscopy Center - at the University of Texas at San Antonio (ICNAM-UTSA) for their technical characterization assistance.

REFERENCES

- Aharoni C. and Ungarish M. (1977). Kinetics of activated chemisorptions. Part 2 Theoretical models. *J. Chem. Soc. Faraday Trans. 1* (73), 456-464.
DOI: 10.1039/F19777300456
- Ahmed M. A., Ali S.M., El-Deka S. I. and Galal A. (2013). Magnetite–hematite nanoparticles prepared by green methods for heavy metal ions removal from water. *Mater. Sci. Eng. B*. 178 (10), 744-751.
DOI: 10.1016/j.mseb.2013.03.011
- Babel S. and Kurniawan T. A. (2003). Low-cost adsorbents for heavy metals uptake from contaminated water: a review. *J. Hazard. Mater.* 97 (1-3), 219-243.
DOI: 10.1016/S0304-3894(02)00263-7
- Babu B. V. and Gupta S. (2008). Removal of Cr(VI) from wastewater using activated tamarind seeds as an adsorbent. *J. Environ. Eng. Sci.* 7 (5), 553-557.
DOI: 10.1139/S08-025
- Babu B. V. and Gupta S. (2008). Adsorption of Cr(VI) using activated neem leaves as an adsorbent: kinetic studies. *Adsorption* 14 (1), 85-92.
DOI: 10.1007/s10450-007-9057-x
- Badruddoza A., Shawon Z., Rahman M., Hao K., Hidajat K. and Shahab M. (2013). Ionically modified magnetic nanomaterials for arsenic and chromium removal from water. *Chem. Eng. J.* 225, 607-615.
DOI: 10.1016/j.cej.2013.03.114
- Bansal M. D., Singh D. and Garg V. K. (2009). A comparative study for the removal of hexavalent chromium from aqueous solution by agriculture wastes carbons. *J. Hazard. Mater.* 171 (1-3), 83-92.
DOI: 10.1016/j.jhazmat.2009.05.124
- Barakat M. A. (2011). New trends in removing heavy metals from industrial wastewater, *Arabian J. Chem.* 4 (4), 361-377. DOI: 10.1016/j.arabjc.2010.07.019
- Bhattacharya A. K., Naiya T. K., Mandal S.N. and Dasa S. K. (2008). Adsorption, kinetics and equilibrium studies on removal of Cr(VI) from aqueous solutions using different low-cost adsorbents. *Chem. Eng J.* 137 (3), 529-541.
DOI: 10.1016/j.cej.2007.05.021
- Carrillo-Pedroza F. R., Soria-Aguilar M. J., Martínez-Luevanos A. and Narvaez-García V. (2014). Blast furnace (BF) residues for arsenic removal from mining-contaminated groundwater. *Environ. Techol.* 35 (23), 2895-2902. DOI: 10.1080/09593330.2014.925509
- Chowdhury S. R., Yanful E. and Pratt A. (2012). Chemical states in XPS and Raman analysis during removal of Cr(VI) from contaminated water by mixed maghemite–magnetite nanoparticles. *J. Hazard. Mater.* 235-236, 246-256. DOI: 10.1016/j.jhazmat.2012.07.054
- Dakiky M., Khamis M., Manassra M, and Mer'eb M. (2002). Selective adsorption of Chromium(VI) in industrial waste water using low cost abundantly available adsorbents. *Adv. Environ. Res.* 6 (4), 533-540.
DOI: 10.1016/S1093-0191(01)00079-X
- Demirbas E., Kobya M. and Konukman A. E. S. (2008). Error analysis of equilibrium studies for the almond shell activated carbon adsorption of Cr(VI) from aqueous solutions. *J. Hazard. Mater.* 154 (1-3), 787-794.
DOI: 10.1016/j.jhazmat.2007.10.094

- De Boer J. H. (1968). Dynamical character of adsorption, 2nd ed. Oxford University Press, London, UK, 256 pp.
- Dubinin M. M. and Radushkevich L.V. (1947). Equation of the characteristic curve of activated charcoal. *Proc. Acad. Sci. Phys. Chem. Sec., USSR* 55 331-333, 875-890.
- Dubinin M. M. (1960). The potential theory of adsorption of gases and vapors for adsorbents with energetically non-uniform surface. *Chem. Rev.* 60 (2), 235-266. DOI: 10.1021/cr60204a006
- Foo K. Y. and Hameed B. H. (2010). Insights into the modeling of adsorption isotherm systems. *Chem. Eng. J.* 156 (1), 2-10. DOI: 10.1016/j.cej.2009.09.013
- Freundlich H. M. F. (1906). Over the adsorption in solution. *J. Phys. Chem.* 57, 385-471.
- Ghosh P. K. (2009). Hexavalent chromium [Cr(VI)] removal by acid modified waste activated carbons. *J. Hazard. Mater.* 171 (1-3), 116-122. DOI: 10.1016/j.jhazmat.2009.05.121
- Grosvenor A. P., Kobe B. A. and McIntyr N. S. (2004). Examination of the oxidation of iron by oxygen using X-ray photoelectron spectroscopy and QUASESTM. *Surface Sci.* 565 (2-3), 151-162. DOI: 10.1016/j.susc.2004.06.210
- Guhab S. and Chaudhuri M. (1990). Removal of As(III) from groundwater by low cost materials. *Asian Environ.* 12 (1), 42-50.
- Gupta S. and Babu B.V. (2009). Removal of toxic metal Cr(VI) from aqueous solutions using sawdust as adsorbent: Equilibrium, kinetics and regeneration studies. *Chem. Eng. J.* 150 (2-3), 352-365. DOI: 10.1016/j.cej.2009.01.013
- Haghsereht F. and Lu G. (1998). Adsorption characteristics of phenolic compounds onto coal-reject-derived adsorbents. *Energy Fuels* 12 (6), 1100-1107. DOI: 10.1021/ef9801165
- Ho Y.S. and McKay G. (1999). Pseudo-second order model for sorption processes. *Process Biochem.* 34 (5), 451-465. DOI: 10.1016/S0032-9592(98)00112-5
- Hobson J. P. (1969). Physical adsorption isotherms extending from ultra-high vacuum to vapor pressure. *J. Phys. Chem.* 73 (8), 2720-2727. DOI: 10.1021/j100842a045
- Hu J., Lo I. M. and Chen G. (2004). Removal of Cr(VI) by magnetite. *Water Sci. Technol.* 50 (12), 139-146.
- Hutson N. D. and Yang R. T. (1997). Theoretical basis for the Dubinin-Radushkevich (D-R) adsorption isotherm equation. *Adsorption* 3 (3), 189-195. DOI: 10.1007/BF01650130
- Hsu N. H., Wang S. L., Liao Y. H. Huang S. T., Tzou Y. M. and Huang Y. M. (2009). Removal of hexavalent chromium from acidic aqueous solutions using rice straw-derived carbon. *J. Hazard. Mater.* 171 (1-3), 1066-1070. DOI: 10.1016/j.jhazmat.2009.06.112
- Inbaraj S. and Chen B.H. (2011). Dye adsorption characteristics of magnetite nanoparticles coated with a biopolymer poly(c-glutamic acid). *Biores. Technol.* 102 (19), 8868-8876. DOI: 10.1016/j.biortech.2011.06.079
- Kannan K. (1995). Fundamentals of environmental pollution. S. Chand and Co. Ltd. New Delhi, India, 366 pp.
- Karadag D., Koc Y., Turan M. and Ozturk M. (2007). A comparative study of linear and nonlinear regression analysis for ammonium exchange by clinoptilolite zeolite. *J. Hazard. Mater.* 144 (1-2), 432-437. DOI: 10.1016/j.jhazmat.2006.10.055
- Kumar K. V. and Sivanesan S. (2006). Pseudo second order kinetics and pseudo isotherms for malachite green onto activated carbon: comparison of linear and nonlinear regression methods. *J. Hazard. Mater.* 136 (3), 721-726. DOI: 10.1016/j.jhazmat.2006.01.003
- Kundu S. and Gupta A. K. (2006). Arsenic adsorption onto iron oxide-coated cement (IOCC): regression analysis of equilibrium data with several isotherm models and their optimization. *Chem. Eng. J.* 122 (1-2), 93-106. DOI: 10.1016/j.cej.2006.06.002
- Kurniawan T. A. Chan G. Y., Lo W. and Babel S. (2006). Comparisons of low-cost adsorbents for treating wastewaters laden with heavy metals. *Sc. Total Env.* 366 (2-3), 409-426. DOI: 10.1016/j.scitotenv.2005.10.001
- Langmuir I. (1916). The constitution and fundamental properties of solids and liquids. *J. Am. Chem. Soc.* 38 (11), 2221-2295. DOI: 10.1021/ja02268a002
- Li L., Fan L., Sun M., Qiu H., Li X., Duan H. and Luo C. (2013). Adsorbent for chromium removal based on graphene oxide functionalized with magnetic cyclodextrin-chitosan. *Coll. Surf. B Biointerf.* 107, 76-83. DOI: 10.1016/j.colsurfb.2013.01.074
- López-Delgado A., Pérez C. and López F. A. (1998). Sorption of heavy metals on blast furnace sludge. *Water Res.* 32 (4), 989-996. DOI: 10.1016/S0043-1354(97)00304-7
- Mamindy-Pajany Y., Hurel C., Marmier N. and Roméo M. (2011). Arsenic (V) adsorption from aqueous solution onto goethite, hematite, magnetite and zero-valent iron: Effects of pH, concentration and reversibility. *Desalination* 281, 93-99. DOI: 10.1016/j.desal.2011.07.046
- Mane V. S., Mall I. D. and Srivastava V. C. (2007). Kinetic and equilibrium isotherm studies for the adsorptive removal of Brilliant Green dye from aqueous solution by rice husk ash. *J. Environ. Manage.* 84 (4), 390-400. DOI: 10.1016/j.jenvman.2006.06.024
- Mohan D., Singh K. P. and Singh V. K. (2006). Trivalent chromium removal from wastewater using low cost activated carbon derived from agricultural waste material and activated carbon fabric cloth. *J. Hazard. Mater.* 135 (1-3), 280-295. DOI: 10.1016/j.jhazmat.2005.11.075

- Nethaji S., Sivasamy A. and Mandal A. B. (2013). Preparation and characterization of corn cob activated carbon coated with nano-sized magnetite particles for the removal of Cr(VI). *Biores. Technol.* 134, 94-100.
DOI: 10.1016/j.biortech.2013.02.012
- Ng J. C., Cheung W. H. and McKay G. (2003). Equilibrium studies for the sorption of lead from effluents using chitosan. *Chemosphere* 52 (6), 1021-1030.
DOI: 10.1016/S0045-6535(03)00223-6
- Nriagu J. O., Pacyna J. M., Milford J. B. and Davidson C.I. (1988). Distribution and characteristic features of chromium in the atmosphere. In: *Chromium in natural and human environments* (J. O. Nriagu and E. Nieboer, Eds.). John Wiley and Sons, New York, EUA, pp. 125-173.
- Oladoja N. A., Ololade I. A., Alimi O.A., Akinnifesi T. A. and Olaremu G.A. (2013). Iron incorporated rice husk silica as a sorbent for hexavalent chromium attenuation in aqueous system. *Chem. Eng. Res. Des.* 91 (12), 2691-2702. DOI: 10.1016/j.cherd.2013.03.001
- Petrusevski B., Boere J., Shahidullah S. M., Sharma S. K. and Schippers J. C. (2002). Adsorbent-based point-of-use system for arsenic removal in rural areas. *J. of Water SRT-Aqua* 51 (3), 135-144.
- Rocher V., Siaugue J. M., Cabuil V. A. and Bee A. (2004). Removal of organic dyes by magnetic alginate beads. *Water Res.* 42 (4-5), 1290-1298.
DOI: 10.1016/j.watres.2007.09.024
- Roine A. (2002). Outokumpu HSC Chemistry® for Windows. Chemical reaction and equilibrium software with extensive thermochemical database [online]. <http://www.chemistry-software.com/pdf/HSC/full%20manual%20HSC%20Chemistry%205.pdf> 25/04/2017
- Siboni M. S., Samarghandi M. R., Azizian S., Kim W. G. and Lee S. M. (2011). The removal of hexavalent chromium from aqueous solutions using modified holly sawdust: equilibrium and kinetics studies. *Environ. Eng. Res.* 16 (2), 55-60.
DOI: 10.4491/eer.2011.16.2.55
- Shipley H. J., Yean S., Kan A. T. and Tomson M. B. (2009). Adsorption of arsenic to magnetite nanoparticles, *Environ. Tox. and Chem.* 28 (3), 509-515.
DOI: 10.1897/08-155.1
- Tuutijarvi T., Sillanpa M., Lu J. and Chen G. (2009). As(V) adsorption on maghemite nanoparticles. *J. Hazard Mater.* 166 (2-3), 1415-1420.
DOI: 10.1016/j.jhazmat.2008.12.069
- Tempkin M. I. and Pyzhev, V. (1940). Kinetics of ammonia synthesis on promoted iron catalyst. *Acta Phys. Chim. USSR* 12, 327-356.
- Vijayaraghavan K., Padmesh T. V. N., Palanivelu K. and Velan M. (2006). Biosorption of nickel(II) ions onto *Sargassum wightii*: application of two-parameter and three parameter isotherm models. *J. Hazard. Mater.* 133 (1-3), 304-308.
DOI: 10.1016/j.jhazmat.2005.10.016
- Višekruna A., Strkalj A. and Marinić Pajc L. (2011). The use of low cost adsorbents for purification wastewater. *The Holistic Approach Environ.* 1 (1), 29-37.
- Webber T. W. and Chakkravorti R. K. (1974). Pore and solid diffusion models for fixed-bed adsorbers. *AIChE J.* 20 (2), 228-238.
DOI: 10.1002/aic.690200204