



Revista Facultad de Ingeniería Universidad de Antioquia

ISSN: 0120-6230

ISSN: 2422-2844

Facultad de Ingeniería, Universidad de Antioquia

Builes-Jaramillo, Alejandro; Gómez-Bedoya, Julián;
Lopera-Urbe, Stephania; Fajardo-Castaño, Valeria
Hotspots, daily cycles and average daily dose of PM2.5 in a cycling route in Medellin
Revista Facultad de Ingeniería Universidad de
Antioquia, no. 96, 2020, July-September, pp. 87-99
Facultad de Ingeniería, Universidad de Antioquia

DOI: 10.17533/udea.redin.20191153

Available in: <http://www.redalyc.org/articulo.oa?id=43063711009>

- How to cite
- Complete issue
- More information about this article
- Journal's webpage in redalyc.org

UDEM redalyc.org

Scientific Information System Redalyc

Network of Scientific Journals from Latin America and the Caribbean, Spain and Portugal

Project academic non-profit, developed under the open access initiative

Hotspots, daily cycles and average daily dose of PM_{2.5} in a cycling route in Medellín

Puntos críticos, ciclos diarios y dosis diaria de PM_{2.5} para una cicloruta en Medellín

Alejandro Builes-Jaramillo ^{1*}, Julián Gómez-Bedoya ^{1, 2}, Stephania Lopera-Urbe ¹, Valeria Fajardo-Castaño ¹

¹Facultad de Arquitectura e Ingeniería, Institución Universitaria Colegio Mayor de Antioquia. Carrera 78 # 65-46. C. P. 050034. Medellín, Colombia.

²Maestría en Desarrollo Sostenible, Instituto Tecnológico Metropolitano. Calle 73 # 76A-354. C. P. 050034. Medellín, Colombia.

CITE THIS ARTICLE AS:

A. Builes, J. Gómez, S. Lopera and V. Fajardo. "Hotspots, daily cycles and average daily dose of PM_{2.5} in a cycling route in Medellín", *Revista Facultad de Ingeniería Universidad de Antioquia*, no. 96, pp. 87-99, Jul-Sep 2020. [Online].

Available: <https://www.doi.org/10.17533/udea.redin.20191153>

ARTICLE INFO:

Received: September 12, 2019

Accepted: November 20, 2019

Available online: November 20, 2019

KEYWORDS:

Air pollution; environmental monitoring; environmental health; environmental management

Contaminación atmosférica; vigilancia ambiental; higiene ambiental; gestión ambiental

ABSTRACT: Bicycle sharing systems are an alternative to promote sustainable transportation and active living. Bicycle users are exposed to traffic and to pollutants in their trips; therefore, the analysis of pollutant concentrations and user exposure is of utmost importance for planning the expansion of creation of these transportation systems. In order to evaluate the concentrations and exposure of cyclists to PM_{2.5}, we designed a route within the bicycle sharing system of Medellín and implemented a sensor-based monitoring protocol. Measurements were carried out with a low-cost sensor validated with local information. Potential average daily dose of PM_{2.5} was calculated based on the average time of exposure and the level of effort made by the user while riding. Hotspots were identified as the zones on the route with concentrations three standard deviations above the average for each route. PM_{2.5} concentrations were found to be highly variable in terms of hour of the day and season of the year. When the concentrations are higher, the potential average daily dose is doubled. There are two types of hotspot according to the built environment configuration on the route, and the concentrations in these hotspots are reaching values considered as harmful for sensitive population groups. The present results are key for the discussion leading to the implementation of measures that will improve the welfare of cyclists in Medellín, that may span from infrastructure intervention to early warning systems.

RESUMEN: Los sistemas de bicicletas compartidas son una alternativa para promover el transporte sostenible y la vida activa. Los ciclistas están expuestos al tráfico y a contaminantes en sus viajes; por lo tanto, el análisis de concentraciones de contaminantes y la exposición de los usuarios es importante para planificar la expansión de estos sistemas. Diseñamos una ruta dentro del sistema de bicicletas compartidas de Medellín para evaluar concentraciones y la exposición de ciclistas a PM_{2.5}, las mediciones se realizaron con un sensor de bajo costo validado con información local. La dosis diaria promedio de PM_{2.5} se calculó con base en el tiempo promedio de exposición y el nivel de esfuerzo al usar la bicicleta. Los puntos críticos se identificaron como las zonas en la ruta con concentraciones de tres desviaciones estándar por encima del promedio. Se encontró que las concentraciones de PM_{2.5} son muy variables en términos de hora del día y temporada del año. Cuando las concentraciones son más altas, la dosis diaria promedio se duplica. Hay dos tipos de puntos críticos de acuerdo con la configuración del entorno en la ruta, y las concentraciones en estas zonas alcanzan valores considerados perjudiciales para grupos de población sensibles. Los resultados son clave para procesos de implementación de medidas que mejorarán el bienestar de los ciclistas en Medellín, que pueden abarcar desde la intervención de infraestructura hasta los sistemas de alerta temprana.

* Corresponding author: Alejandro Builes Jaramillo

E-mail: luis.builes@colmayor.edu.co

ISSN 0120-6230

e-ISSN 2422-2844

1. Introduction

The use of bicycles as public transportation has increased in the world since the 1960s. Cities around the world are developing more accessible bicycle sharing systems (BSS) in order to enhance the use of this transportation mode for commuting and/or physical activity. There are many expected benefits of cycling as public transportation: the reduction of fossil fuel consumption, the increase of physical activity, and the reduction of congestion in the cities [1–3]. In order to provide suitable infrastructure for cycling, governments need to invest in bicycle lanes, stations, comfort, continuity of roads and promote the integration of the BSS with traditional transportation paying schemes, among others. Policy makers and city planners should be aware that this kind of investment must be in tune with the growing use of each BSS [2, 4, 5].

The selection of the bicycle as a transportation mode will depend on factors such as the age of the user, gender, safety, lane infrastructure, health benefits of cycling, and health risks associated with air quality on the road [6–8]. Users of BSS and walkers are exposed to harmful pollutants as they are in direct contact with mobile sources [9–11]; therefore, they might lose all the health benefits from the outdoor activities [12]. Concentrations of pollutants on roads are directly influenced by road congestion and the overall atmospheric conditions in the surroundings [13–15], and according to recent research, the availability of real-time pollution information, provided by sensors and smartphone applications, may influence the frequent user on the decision of taking out a bicycle [16, 17]. Particulate matter measurements techniques are mainly divided in two, the measurement of particle concentration and the measurement of particle size [18]. Particle size measurements are important as they give information of the dynamics of the particle and persistence in the atmosphere [19]. Concentrations of a defined size of particle are important for the definition of emission limits and permitted concentration in order to guarantee safety [20, 21].

According to the World Health Organization (WHO), Medellín is one of the most polluted cities in Latin America, reaching average concentrations of fine inhalable particles with diameters of 2.5 micrometers or smaller ($PM_{2.5}$) of around $26.7 \mu g/m^3$ [22]. Air pollution in the city has a daily cycle with two peak hours, one early in the morning and a second one in the afternoon, both related to peaks in traffic and industrial production. Air pollution is affected by two processes, namely the temperature inversion in the atmosphere of the valley where Medellín is located, and the atmospheric stabilization during the dry-to-wet (March–October) season transition [23, 24]. Due to this well-known issue of air pollution,

the city has invested in air pollution management by increasing the number of monitoring stations all over the metropolitan area and by promoting public policy to improve transportation and the quality of fossil fuels in the country [25] (www.siata.gov.co).

The Medellín metropolitan area, in Colombia, has incorporated the goal of promoting bicycles as sustainable urban transportation in its urban development policies. The region defined in 2015 its most recent bicycle public policy, including concrete plans for bicycle infrastructure expansion, which is expected to promote bicycle demand, projecting it to be up to 10% of the total trips made in the city [26]. Additionally, the BSS in the region, known as EnCicla (www.encicla.gov.co), was implemented in 2010 to promote sustainable mobility. EnCicla started its operation with six stations and 105 bicycles and currently has 51 stations, including 32 automatic stations and 19 manual operations, and more than 1,300 bicycles and approximately 92,000 active users. According to EnCicla, the system accounts for 30% of bicyclists in the city with user ages ranging from 16–75 years.

Air pollution is then an important issue for the cyclists and pedestrians in Medellín, and the monitoring of pollutants on a route may be a key factor for decision-making in areas such as the improvement of biking infrastructure, the development of early warning systems, or the proposal of design parameters for new routes to be constructed. Here, we present the first effort in the city to study the concentrations and potential exposure of cyclists to $PM_{2.5}$ in the EnCicla system incorporating seasonal and diurnal variations. The work is organized as follows: Section 2 outlines the methodological approach and includes the definition of the study area, how sensors are used and validated, the monitoring protocols, the calculation of the potential average daily dose, and the detection of hotspots on the route. Section 3 provides the results found and the discussion. And in Section 4, concluding remarks are presented.

2. Material and methods

2.1 Study area

EnCicla is a BSS with 51 stations and more than 35 km of routes that are divided into three types of lanes (Figure 1a and 1b): i) segregated on the sidewalk (25.3 km), ii) segregated in a vehicle lane, separated by vertical elements (9.5 km), and iii) non-segregated, where the bicycle shares the lane with automobiles (0.2 km). According to the origin/destination information of the BSS, there are three peak periods of use, a morning interval from 06:00 to 07:00 hours, another in the middle of the day from 12:00 to 14:00 hours, and a third one in the

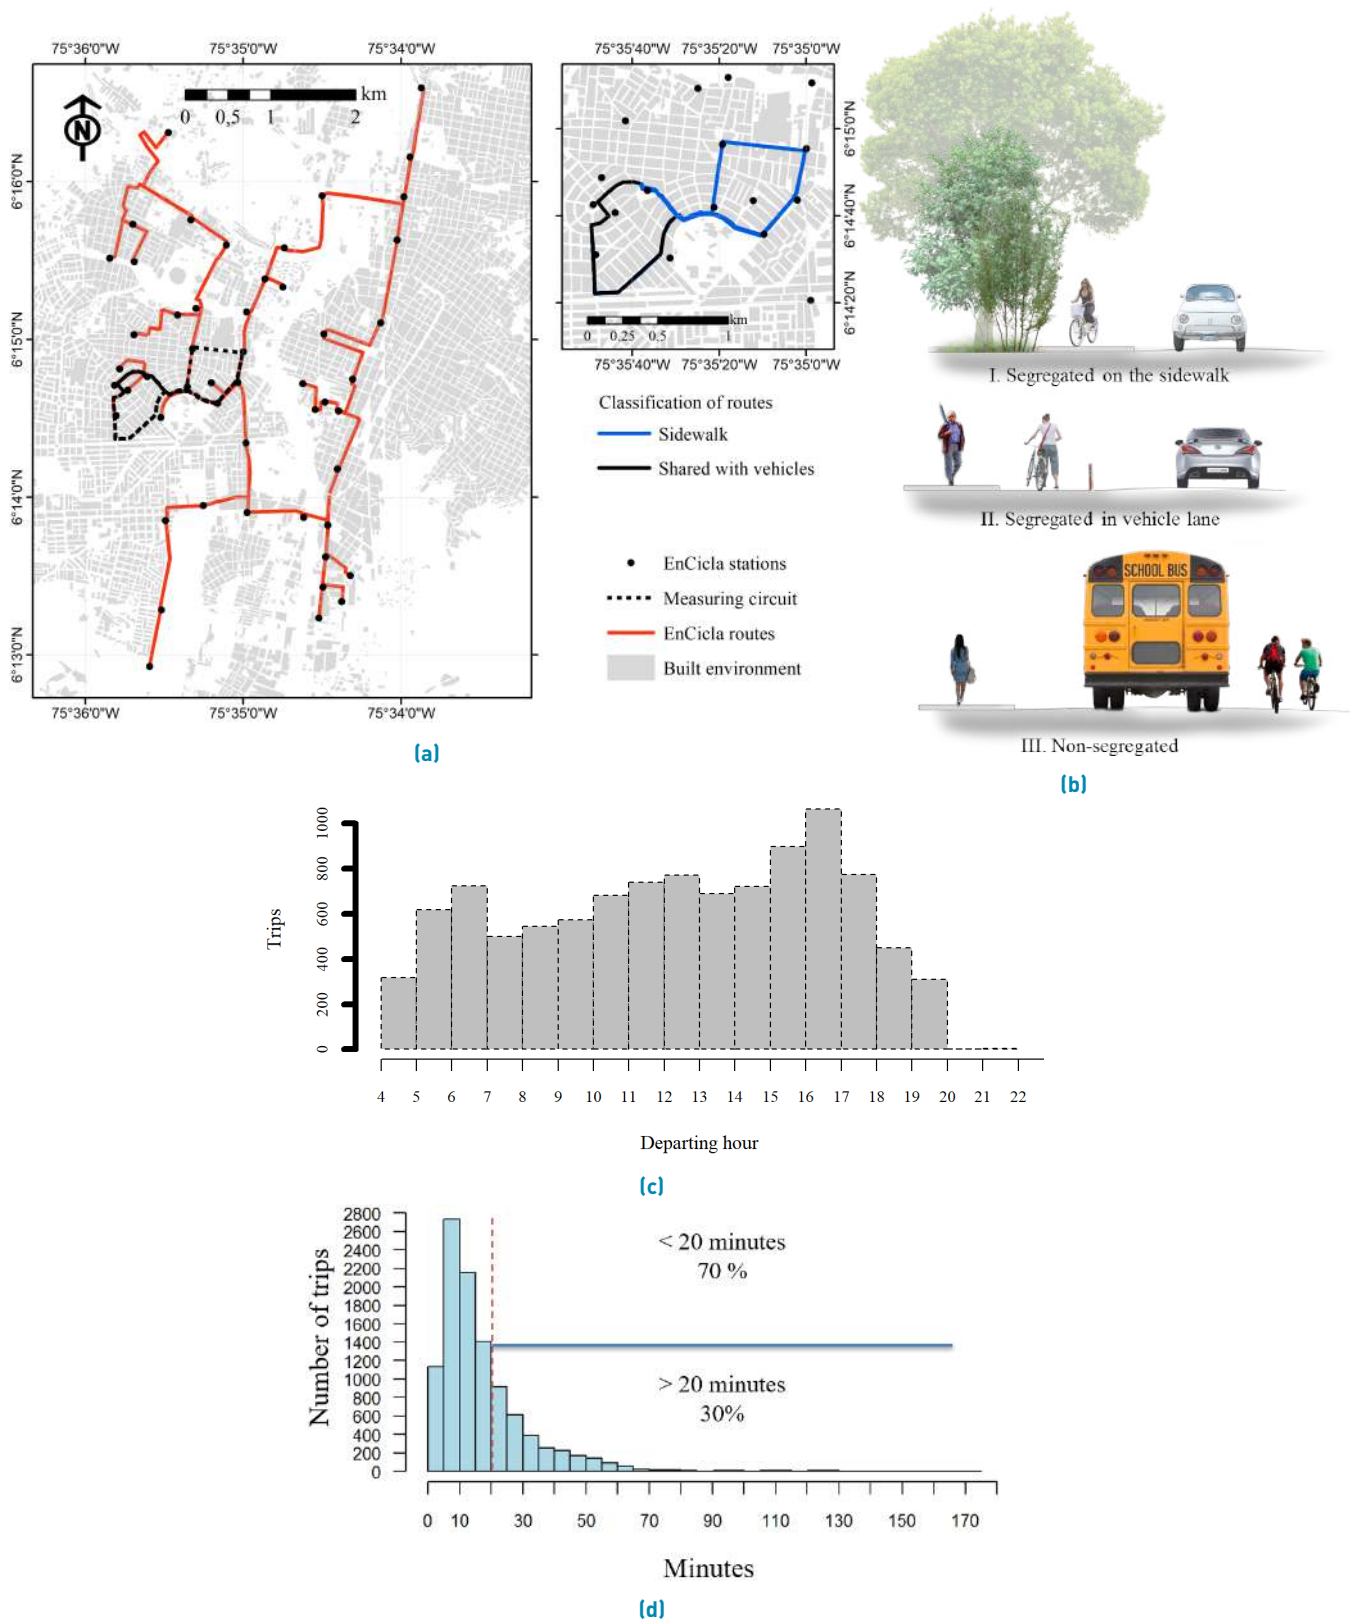


Figure 1 a) Cycling route infrastructure in the EnCicla BSS. In the upper right corner, there is a detail of the monitoring circuit. b) Types of bicycle lane infrastructure in the BSS. c) Distribution of trips in the system from 04:00 to 22:00 hours

afternoon from 16:00 to 17:00 hours (Figure 1c). We defined a 5-km circuit within the routes of the system in order to monitor the $PM_{2.5}$ concentrations. The circuit is located in a relatively flat portion of the city where the mean altitudinal difference between stations is no more than 35 m in 2 km (gradient < 2%), thus reducing the influence of gradient in the efficiency of vehicles and facilitating the measuring procedure for bicyclists. The circuit also goes along heavy-traffic roads, intermediate-traffic roads and residential roads (Figure 1a).

2.2 Use of sensors

Sensors are a suitable technology for monitoring and analyzing air pollution concentrations, with proven accuracy and practicality for: the configuration of air pollution monitoring networks [27], real-time analysis on a route when installed in cars [28], and also for measuring when installed on bicycles [29–31]. In particular, the AirBeam sensor has been on the market for several years and it has been in continuous development since its introduction in 2014 (<http://aircasting.org/>). This is low-cost, easy-to-use equipment used in citizen participatory research that offers a suitable tool for the monitoring of air pollution [32–34]. The AirBeam is equipped with a Shinyei PPD60PV particle sensor [35] that extracts air through a detection chamber in which the light comes from an LED bulb scattering particles in the air stream. This scattering of light is recorded by a detector and converted into a measure that estimates the number of particles in the air. These measurements are reported approximately once per second via Bluetooth to the Android application AirCasting [36]. The precision of the device was tested with three different pollutant sources, showing coefficients of variation of less than 10% when compared with measurements made with professional particle-sizing and analysis equipment [37]. Also, the sensor has a good performance for humid environments, making it a good option for measuring in a humid tropical setting such as Medellín [38].

2.3 Validation of the sensor used

We validated the use of AirBeam sensor for the local conditions as recommended by [37]. The validation consisted of calculating a Pearson Correlation Coefficient [39] using 1,000 bootstrapping replicates in order to construct a 95% interval due to the [40] between the AirBeam measurements and the measurements produced by the air-quality stations installed by the local environmental agency in the Sistema de Alerta Temprana de Medellín y del Valle de Aburrá (SIATA – <https://siata.gov.co/>). This network has 18 calibrated stations used to monitor $PM_{2.5}$ concentrations in the region. Aggregated data can be accessed after

a quality control process at www.siata.gov.co. In a second stage of validation, we compared the general daily cycle features (hourly peaks in concentration) of our measurements with the atmospheric backscattering data produced by one of the ceilometers [41] near the monitoring route. Ceilometers in the SIATA network are used to measure the vertical profile of the atmosphere; these instruments are simplified Lidar systems, which operate in the near-infrared wavelength range, giving information about the energy that is backscattered by particles in the atmosphere. Atmospheric backscattering can be used as a proxy for the concentration of aerosols and particles in the atmosphere [42, 43]; therefore, it may indicate if the general performance of the sensor is responding to the presence of pollutants in the atmosphere.

2.4 Monitoring protocol

A successful measurement consisted of a complete circuit within the time lapse from one hour to the next (e.g. 06:00 to 07:00), and complete daily monitoring comprised 13 measures from 06:00 to 18:00 hours, in order to include the peak activity on the BSS (Figure 1c). The monitoring system includes: i) AirBeam connected to its mobile application (AirCasting) previously installed in a smart phone, providing measures of $PM_{2.5}$ and global positioning system (GPS) coordinates each second, and ii) a cyclist who carries the sensor and the mobile phone whilst cycling around the circuit. Each monitoring circuit was carried out during meteorological dry conditions for two reasons: i) BSS users decrease significantly during episodes of rain, and ii) precipitation may alter drastically the concentrations of $PM_{2.5}$ in the atmosphere.

2.5 Potential average daily dose

Following the EPA Exposure Factors Handbook [44] and the work of [45], we computed the potential average daily dose (PADD) of bicycle users riding twice a day (**one** round trip) with an average trip duration of 20 min (Figure 1d). PADD is defined in Equation 1:

$$PADD = \frac{C \times IR \times ED}{BW} \quad (1)$$

where C is the concentration of $PM_{2.5}$ ($\mu g/m^3$), IR is the intake rate (m^3/d), ED is the exposure duration (h/d) during a 1-year period, and BW is the body weight (kg) of the cyclist. IR is assumed according to the average traveling speed during the monitoring protocols based on inhalation rate values recommended by the International Commission on Radiological Protection (ICRP). For male adults, IR is $1.5 m^3/d$, and for adult females it is $1.25 m^3/d$ for light effort. In the case of moderate/strong effort, IR for male adults is $3.00 m^3/d$, and for female adults it is

$2.70 \text{ m}^3/\text{d}$ [45]. *PADD* is a key measure to understand the actual amount of pollutant that reaches the tissues of the exposed individual [46], thus the monitoring of air quality is necessary but not enough to study the potential threat that pollution may have on active individuals as the bicyclists.

2.6 Detection of hotspots

We selected the hourly routes with a mean concentration of $\text{PM}_{2.5}$ equal to or higher than $25 \mu\text{g}/\text{m}^3$. This is considered as a control value because it is the condition of mean concentrations in the city reported by the WHO, and therefore we assume that higher values are due to unusual conditions. After detecting those routes with a mean value above the control and use the Shapiro-Wilk test [47] to identify if the hourly data is normally distributed, we defined a threshold for the identification of hotspots as locations measured on the route reaching concentrations higher than three standard deviations above the mean value (both calculated with the measuring records of the selected route). This threshold represents persistent concentrations above the environmental conditions that may be occurring due to the configuration of the route (e.g. traffic lights, interaction with vehicles or obstacles to the dispersion of pollutants). After detecting hotspots, we compare the concentration and daily cycle of the concentrations measured on the hotspots and the route for a detailed analysis.

3. Results

3.1 Validation of the sensor

During 50 hours, we measured close to one of the SIATA stations (UNAL) in an outdoors non-controlled environment, as similar as possible to the conditions that we might find measuring on route. We used hourly average concentrations from the AirBeam sensor and hourly averaged concentrations reported by SIATA (Figure 2). We found a Pearson correlation coefficient in the range of $[0.81 - 0.94]$ with a 95% confidence that can be explained by the differences in the methodologies for measurement, we have to remember that stations rely on low-vol measurement equipment and filter weighting and sensors in light scattering. We found that the sensor has a root mean square error (RMSE) of $7.6 \mu\text{g}/\text{m}^3$ and a normalized RMSE (NRMSE) of 13%. This first result of validation shows that the sensor has fairly good representation of the concentrations near the station as found recently by [48] for outdoor studies.

We complement the validation with a qualitative comparison between measurement circuits and the vertical profiles of backscattering for three days: March 28, June 18 and June 28 2018 (Figure 3). On March 28,

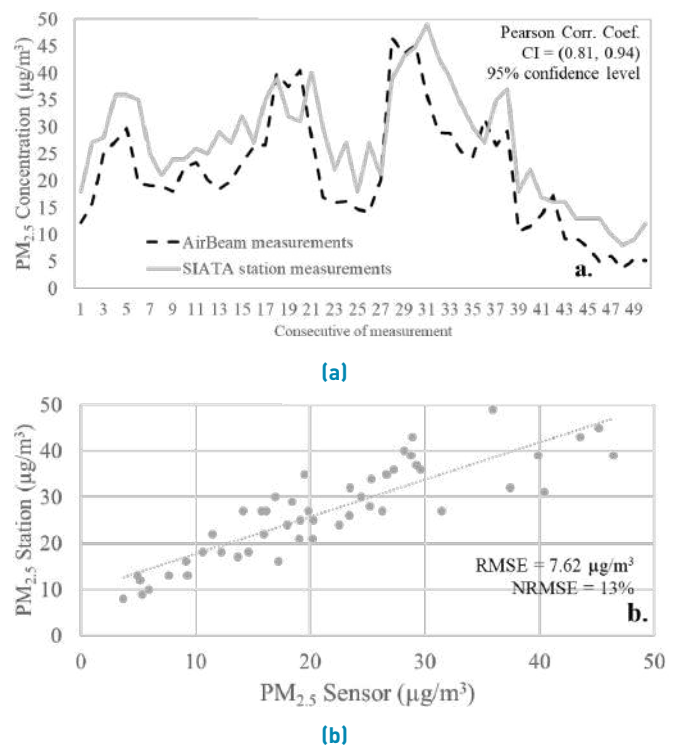


Figure 2 Comparison of measurements between the AirBeam sensor and the UNAL SIATA station. Time series of concentration during the 50 hours of measurement (a), Station and Sensor concentration scatter plot (b)

during the season transition, $\text{PM}_{2.5}$ concentrations were higher than $30 \mu\text{g}/\text{m}^3$ for most of the day, especially from 06:00 to 10:00 hours, while backscattering showed clouds around 1,500 m above the surface (red); there was high backscattering due to particles all day, but it was more intense from 00:00 to 12:00 hours (Figure 3b). On June 18, concentrations of $\text{PM}_{2.5}$ were around $10 \mu\text{g}/\text{m}^3$, and the backscattering pattern was characterized by clouds higher than 3,000 m above the surface and low backscattering near the surface (Figure 3c). On June 28, we measured a peak $\text{PM}_{2.5}$ concentration of $63 \mu\text{g}/\text{m}^3$ at 09:00 hours, and although the backscattering plot showed intermittency in the clouds around 1,500 m above the surface that may have led to more effective dispersion of pollutants, we observed high values for backscattering from 0 to 500 m above the surface that peaked around 09:00 to 10:00 hours and were abruptly reduced at 11:00 (Figure 3c) as measured in the circuit (Figure 3a).

As studied by [49], the vertical profiles of backscattering in Medellin during March are characterized by the presence of clouds in the early hours of the morning that configure the valley's atmospheric boundary layer, around 1,500 m above the surface (red color in the backscattering plots in online Figure 3b and 3d), and the presence of high backscattering (light blue in online Figure 3b) below

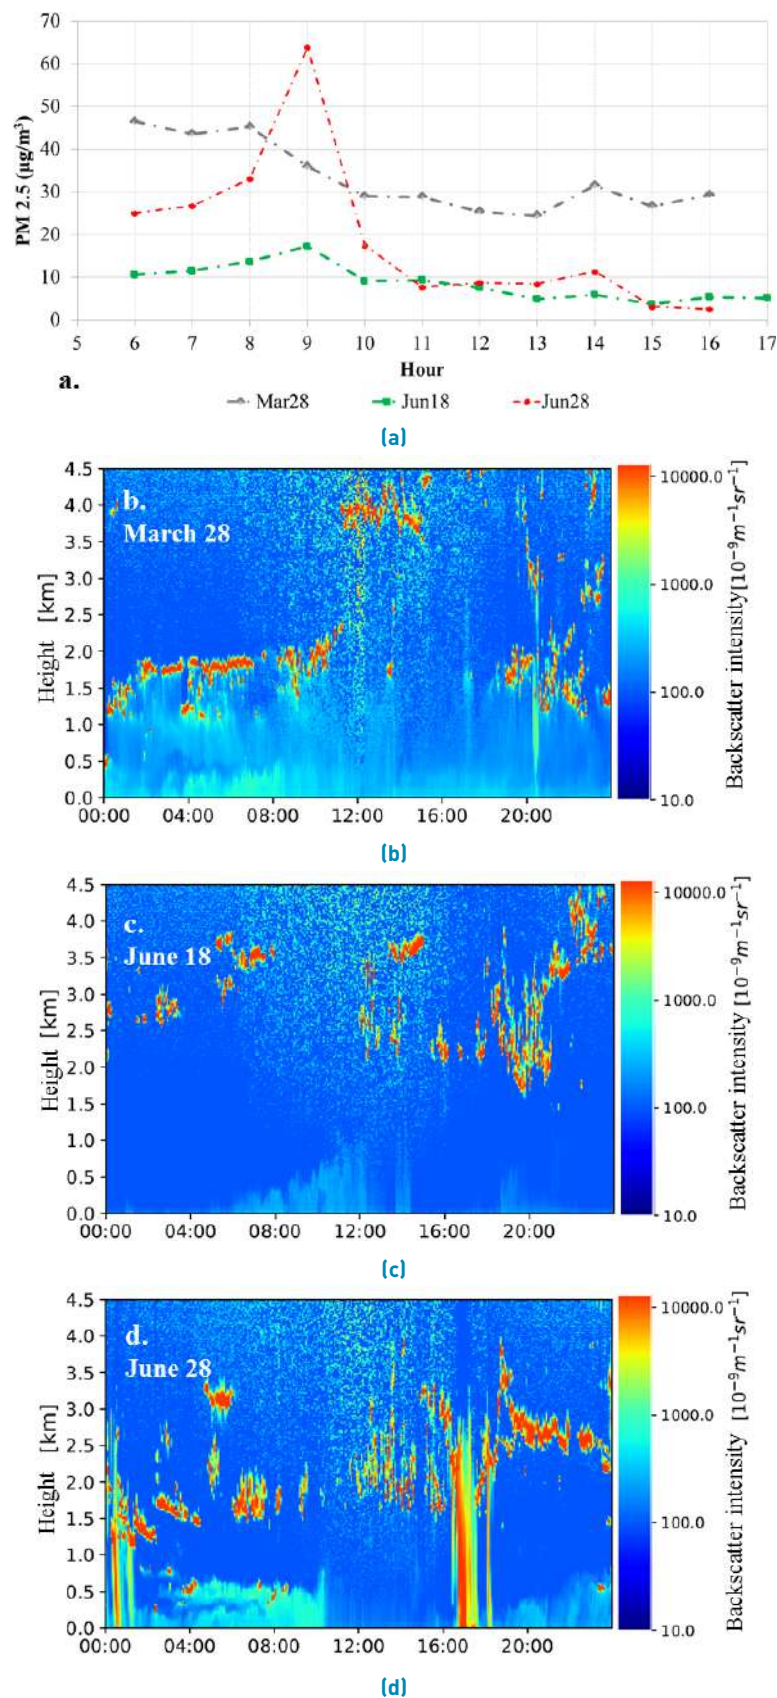


Figure 3 Comparison between hourly cycle of PM_{2.5} concentrations (a) and backscattering intensity for March 28 (b), June 18 (c) and June 28 (d)

this level due to the concentration of aerosols in the lower atmosphere. These clouds starts to disappear around midday, giving pollutants a way to ascend toward the higher levels of the atmosphere. In conditions of a clear sky or clear atmosphere, less backscattering is presented (intense blue in Figure 3b to 3d). According to previous results, we are able to verify that the sensor used provides measurements on site that are consistent with the dynamics of the atmospheric concentrations of aerosols and particles in the region (Figure 3a compared to Figure 3b to 3d).

3.2 Monitoring protocol results

For 13 days, we completed 141 h of complete measuring circuits. The dates of the measurements were defined according to two criteria: i) days during the dry season when rain would not interfere with the measurements (February, June, and July); ii) days during the dry-wet transition when the atmospheric stability increases the concentrations of pollutants in the region (March). The average $PM_{2.5}$ values in the hours measured during the days of monitoring are presented in Table 1. Mean values for reported days with more than 10 continuous hours of measurement in the dry season ranged between 9.6 and $18.9 \mu g/m^3$, while in March, during the season transition, concentrations ranged between 20 and $33 \mu g/m^3$. The daily cycle of concentrations shows that between 06:00 and 10:00 hours, concentrations are consistently higher than those in later hours (shaded region in Figure 4).

Concentrations of pollutants during the early morning in the region are related to the process of thermal inversion in the local atmosphere that makes the upward movement of pollutants difficult. This result shows how environmental conditions are the main driver of high pollutant concentrations in the region and therefore along the bicycle routes.

3.3 Potential average daily dose

Daily cycles of concentrations reveal that in the early morning it is possible for mean values to reach up to $63 \mu g/m^3$ (Figure 4 and Table 2). Those values may be considered as harmful for sensitive groups or even harmful for everybody according to the air quality index (AQI) calculation defined in the regional normativity [50]. The average time for each monitoring circuit is 40 min, resulting in an average speed of 6.7 m/s that we will consider as moderate to strong effort (IR for males $3.0 m^3/d$ and for females $2.7 m^3/d$). PADD ranges between 0.13 and $1.18 \mu g/kg/d$ for males and from 0.14 to $1.27 \mu g/kg/d$ for females, showing that it is highly dependent on the season as it is doubled from January to March, and also can be increased by 30% if $PM_{2.5}$ is averaged for morning hours or

afternoon hours (see June monitoring dates in Table 1).

3.4 Detection of hotspots

We identified 29 hourly measuring hotspots with mean $PM_{2.5}$ concentrations above $25 \mu g/m^3$ (20% of the total hourly measurements). As expected, most of the hotspots were within the period, 06:00 to 10:00 hours, except for March 27 and 28, during the season transition (dry to wet) when the atmospheric stability maintains conditions unfavorable to pollutant dispersion. The persistent high concentrations on the route of about three standard deviations above the mean value are considered as hotspots, and in total do not reach more than 2.1% of the measurements in the selected hours; in some cases, there were no values higher than the threshold to identify any hotspot in the circuit (shaded in gray in Table 2). After the theoretical identification of hotspots, we proceeded with identification of the hotspots on the route map (Figure 5) and on site. We made a photographic register of the physical configuration of the hotspots (Supplementary material).

Onsite inspection of hotspots permitted us to define two types, according to the built environment: i) canopy tunnel and ii) road intersection. The main characteristic of a canopy tunnel is the closure of high tree canopy over the cycling route. The road intersection type of hotspot corresponds to those places where cyclists needed to wait for more than 2 min in order to cross heavy-transportation roads. The factors identified that influence the concentration of pollutants at those intersections are that: i) the average speed of vehicles is reduced in order to stop for red lights and to start up after green lights; ii) the number of vehicles waiting for a green light increases the number of sources near the cyclist; iii) busy roads include heavy traffic such as buses and trucks.

We selected 5 areas (HS1-HS5) representing intersections and canopy tunnel structures as the detected hotspots (Figure 5a). We compared the distribution of the concentrations measured in each of the HS areas along the route for six selected days using all the hourly measurements available, three in March and three in June. Mean concentrations in March are higher than those found in other months (Table 1 – Section 3.2), these can be seen in the mean values for the complete route measurements and HS areas when comparing Figure 6a and Figure 6b. For the three days in March, we found that the third quantile values of HS2 and HS5 are consistently higher than those along the route; we can observe this for HS1 for March 17 and 27. HS3 and HS4 mean values are higher than values along the route for all days in March, and the third quantiles are higher than those along the route for March 28. This result shows that for March we

Table 1 Mean and standard deviation of the hourly ranges of measurement during each of the dates of measuring

Date (DD/MM/YYYY)	Hourly range of continuous measurements (h)	Mean PM _{2.5} concentration ($\mu\text{g}/\text{m}^3$)	Standard deviation of PM _{2.5} concentration ($\mu\text{g}/\text{m}^3$)	PADD of female adults ($\mu\text{g}/\text{kg d}$)	PADD of male adults ($\mu\text{g}/\text{kg d}$)
24/01/2018	06:00–18:00 (13)	14.4	3.59	0.55	0.511
17/03/2018	06:00–18:00 (13)	21.98	3.25	0.84	0.780
27/03/2018	06:00–17:00 (12)	24.76	4.29	0.95	0.878
28/03/2018	06:00–16:00 (11)	33.26	4.32	1.27	1.181
18/06/2018	06:00–18:00 (13)	8.69	3.04	0.33	0.310
20/06/2018	06:00–17:00 (12)	16.43	4.3	0.63	0.583
21/06/2018	07:00–17:00 (11)	10.51	4.03	0.40	0.374
22/06/2018	06:00–11:00 (6)	17.43	4.7	0.67	0.619
	13:00–17:00 (5)	5.79	3.35	0.22	0.206
25/06/2018	06:00–12:00 (7)	9.87	3.12	0.38	0.350
	14:00–17:00 (4)	3.77	2.55	0.14	0.134
28/06/2018	06:00–16:00 (11)	18.93	6.52	0.73	0.672
3/07/2018	06:00–08:00 (3)	28.23	8.45	1.08	1.003
4/07/2018	06:00–13:00 (8)	15.77	5.02	0.60	0.559
5/07/2018	06:00–17:00 (12)	9.61	3.21	0.37	0.341

can observe higher concentrations of PM_{2.5} on the selected hotspots. For June, we find that HS1 and HS2 have higher mean values and third quantiles when compared with values along the route. These results suggest that for high background concentrations like those found in March both canopy tunnels and intersections act as hotspots, while for lower background concentrations like those in June, only intersections present the hotspot characteristics. We can observe in the daily cycles at the HS areas that the concentrations during the day are consistently higher in the Intersections (HS1, HS2, and HS5) than those measured along the route or in canopy tunnels (Figure 6c).

4. Conclusions

According to our results, exposure to PM_{2.5} in the Medellín BSS is higher in the morning, between 06:00 and 10:00 hours. This is one of the periods with higher activity in the EnCicla system in terms of the number of travelers. In Medellín, universities start classes at 06:00, and most offices open at 08:00; therefore, journeys using bicycle made by students and people on their way to work are (negatively) affected because of the higher values for particle concentrations. Results show that in the dry-to-wet season transition, concentrations in the morning may be around values which are classified as harmful for sensitive groups of people (eg. children or elderly), therefore bicyclists should be aware of this situation if they are included in these groups and use effective protection such as masks [51, 52], as implemented in other countries such as The Netherlands and China. They should also make short journeys,

combining their trips with the public transportation system with integrated BSS stations, to avoid extreme exposure. Including pollutant concentrations in the Equation when deciding for the bicycle as a mean of transportation may induce a decrease in the system demands during the season transition that should be included in the planning of new routes or bicycle acquisition.

PADD based on the daily exposure of cyclists shows that the intake of PM_{2.5} drastically changes by the season and by the hour in the day when they travel. According to the origin-destination data from EnCicla, journeys in the system are on average between 5 and 20 min. Exposure to the high concentrations of PM_{2.5} such as those found in the hotspots therefore may not be so harmful, since cycling only starts to be harmful after 120 min. in those environments with background concentrations between 44 and 150 $\mu\text{g}/\text{m}^3$ [12]. Nevertheless, hotspots may represent harmful locations for other activities such as street vendors or traffic officers (police or other) or garden maintenance workers and pedestrians. Even though the hotspots were identified in a BSS-specific study, the results should open up the discussion about the impacts on health when choosing a particular route, and mode of transport, and hour in the day to travel.

Infrastructure should protect the user from direct contact with vehicles and the possibility of accidents, but in any case, it is a way of protecting from pollutants. Particular interventions in the infrastructure should be designed in order to achieve reductions of particle concentrations related to route configuration. Alternatives such as vegetation [Mejía-Echeverry *et al.*, 2018], water sprinklers [53] or even electromagnetic capture must be

Table 2 Hourly routes with mean concentrations higher than $25 \mu\text{g}/\text{m}^3$. AQI values are dimensionless and were calculated according to [50]; values marked with asterisks are in the range 51–100 and classified as moderate, values marked with a plus sign are in the range 101–150 and classified harmful for the health of sensitive groups, and values marked with a hashtag are in the range 151–200 and classified as harmful for health

Measuring day_hour	Mean PM _{2.5} concentration on the hourly route ($\mu\text{g}/\text{m}^3$)	SD of measurements on the hourly route ($\mu\text{g}/\text{m}^3$)	Threshold (mean + 3SD) ($\mu\text{g}/\text{m}^3$)	AQI	Percentage of measurements above threshold (%)
Mar17_6	25.2	5.4	41.3	79*	2.1
Mar17_7	27.3	3.3	37.3	84*	0.3
Mar17_8	29.7	3.8	41.0	89*	0.0
Mar27_6	26.3	3.6	37.2	81*	0.0
Mar27_7	26.7	4.5	40.2	82*	1.2
Mar27_8	39.9	5.4	56.2	112 ⁺	0.2
Mar27_9	37.4	6.3	56.5	106 ⁺	0.1
Mar27_10	40.4	4.9	55.1	113 ⁺	0.3
Mar27_11	28.2	8.5	53.8	86*	0.1
Mar28_6	46.4	5.7	63.4	128 ⁺	0.2
Mar28_7	43.5	5.5	60.1	121 ⁺	0.2
Mar28_8	45.2	6.5	64.8	125 ⁺	0.3
Mar28_9	35.9	4.5	49.3	102 ⁺	0.0
Mar28_10	28.9	3.7	40.0	87*	0.5
Mar28_11	28.8	4.0	40.9	87*	0.1
Mar28_12	25.3	3.3	35.1	79*	1.5
Mar28_14	31.4	4.0	43.5	93*	1.6
Mar28_15	26.6	4.2	39.2	82*	1.0
Mar28_16	29.3	3.2	38.8	88*	0.9
Jun20_8	32.0	6.6	51.9	94*	0.1
Jun22_8	25.9	5.2	41.6	81*	1.3
Jun28_6	25.1	7.3	47.1	79*	0.0
Jun28_7	26.7	4.4	40.1	82*	1.4
Jun28_8	33.0	11.8	68.4	96*	0.0
Jun28_9	63.9	11.2	97.4	155 [#]	0.0
Jul03_7	28.6	9.8	57.9	86*	0.2
Jul03_9	35.1	13.4	75.3	100*	0.0
Jul04_6	26.5	5.7	43.5	82*	2.0
Jul04_8	28.4	4.6	42.2	86*	0.1


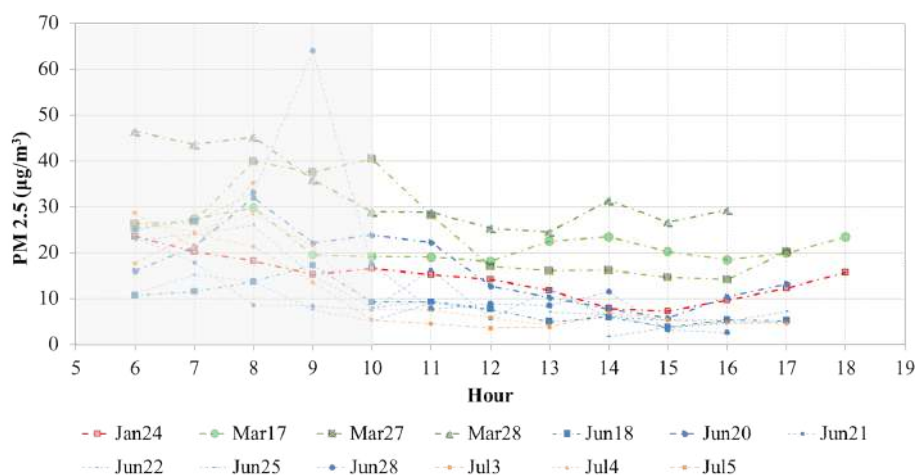


Figure 4 Daily cycle of mean concentration for each of the 13 days measured



(a) Location of hotspots on the monitoring route

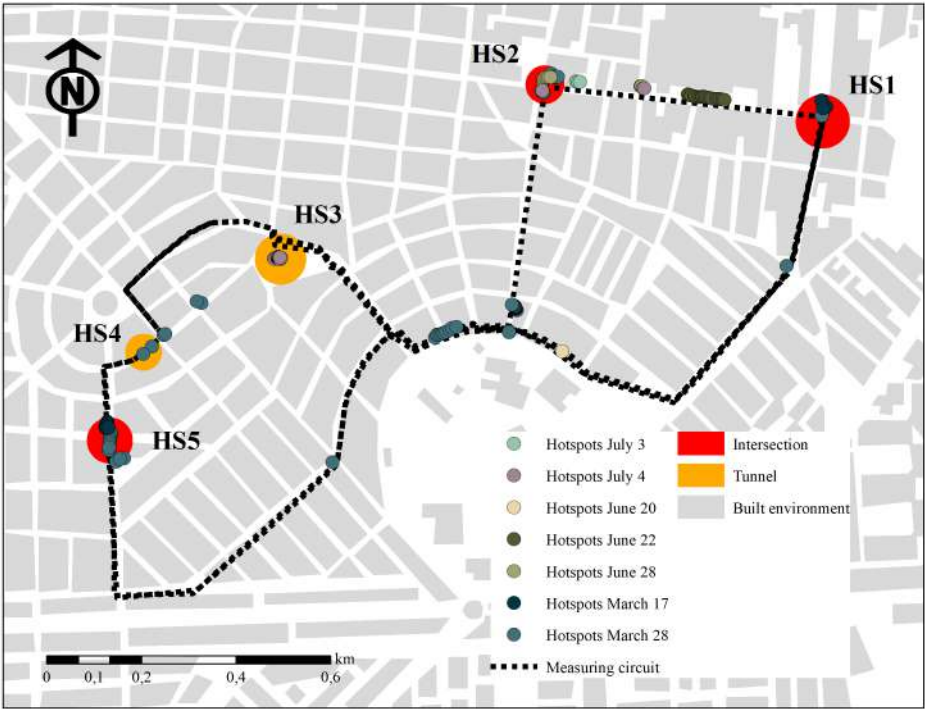

(b) Canopy tunnel structure



(c) Intersection structure

Figure 5 Hotspots detected on the measuring circuit

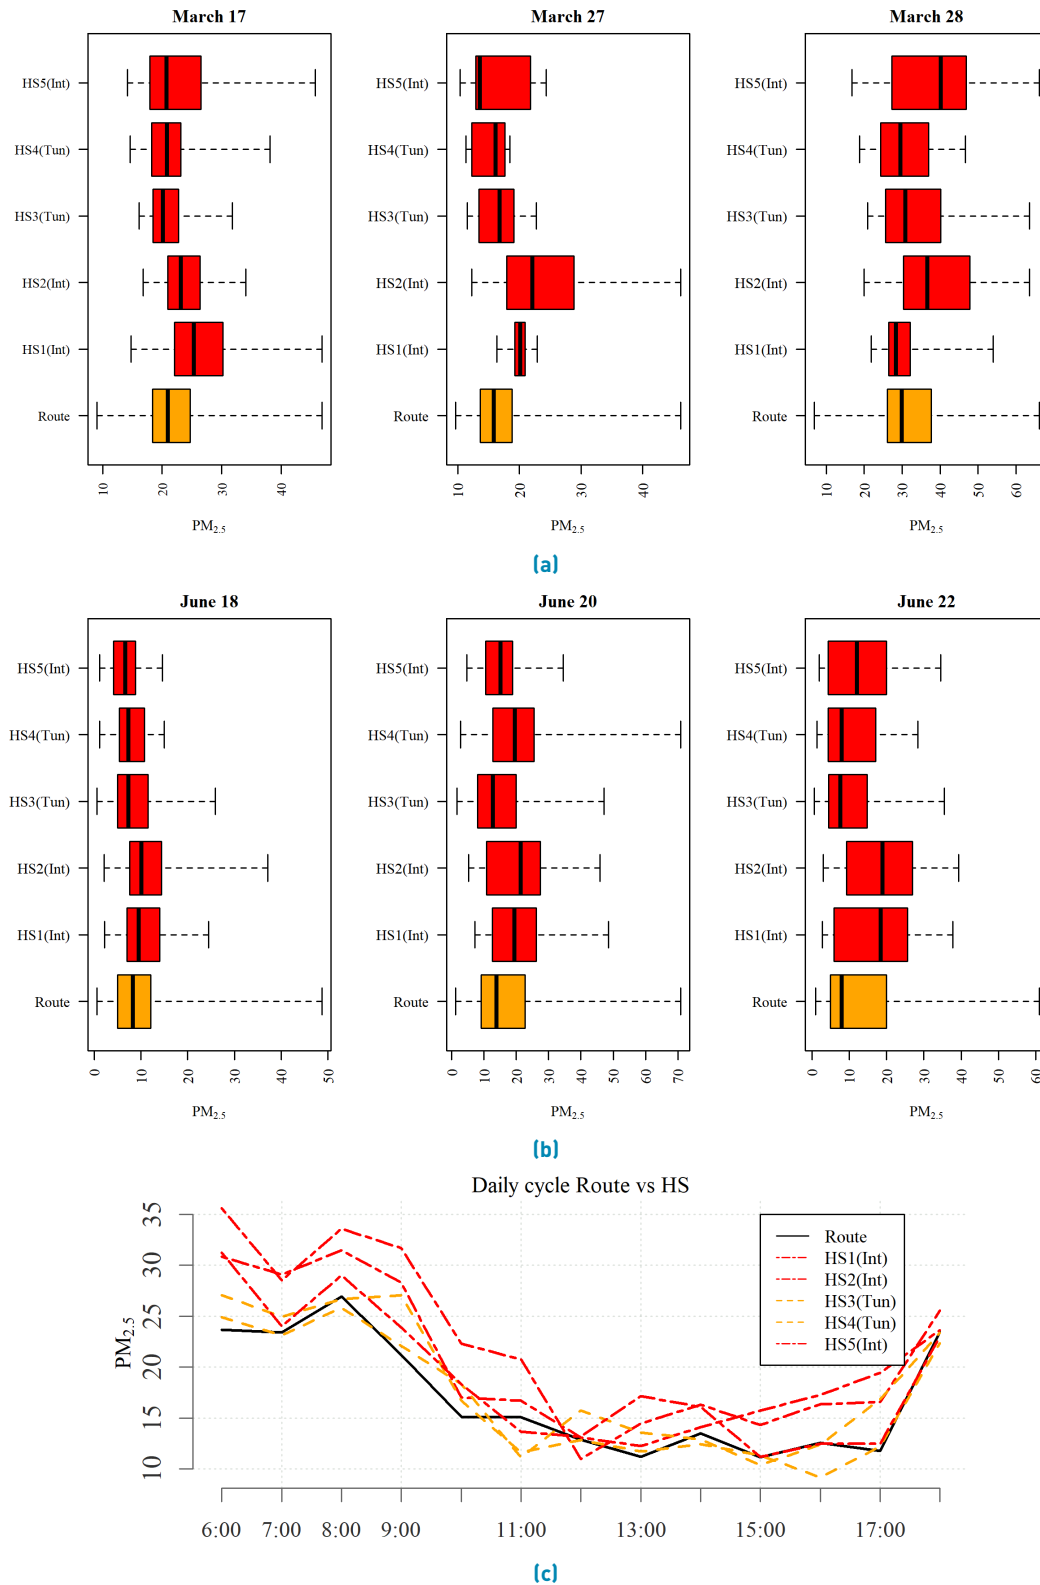


Figure 6 a) and b) Boxplots representing the distribution of $PM_{2.5}$ values for the complete route (orange) and each of the selected hotspots (red). c) Daily cycle of the complete routes compared with the daily cycle of the hotspots computed for eight of the days measured

further studied in order to develop new bicycle routes that protect the user not only from other vehicles but also from the traffic pollution.

Canopy tunnels are attractive to the user in bicycle lanes for two main reasons: i) an appealing landscape and ii) thermal comfort. Indeed, trees have the capacity to retain and absorb particulate matter produced by automobiles [54, 55], but the rates at which these particles are being produced is higher than the absorption capacity of the trees. Such canopy tunnel configurations were also identified as pollutant hotspots in a study of the expansion of the local bus rapid transit system in the city [56]. The physical structure of a canopy tunnel creates a blockage for the dispersion of pollutants in the atmosphere. It also causes lower temperatures at the ground surface than at the top of the canopy which also prevents pollutants from ascending, due to the effect of thermal inversion in the atmosphere. The option of strategic cuts in the canopy, so as to protect the ecological integrity of the routes and to ensure the vertical dispersal of particles, should be further studied.

Road intersections are designed to privilege automobile mobility. At many of the intersections detected as hotspots in this study, there was a high traffic of diesel buses and trucks which, in the region, do not yet reach Euro IV standard. At busy intersections preference is given to motor vehicles; therefore, the cyclist have to wait for up to three changes of vehicle red lights before they get to continue, which accounts for more than 2 min. of waiting. One way to tackle this problem may be programming of the traffic lights to give preference to cyclists, or redesigning the crossings so that bicycles cross on less busy roads.

5. Declaration of competing interest

None declared under financial, professional and personal competing interests.

6. Acknowledgements

We thank the EnCicla BSS (<http://www.encicla.gov.co>) for sharing information regarding typical origin/destination information between stations in the system, and SIATA (<https://siata.gov.co>) for sharing the backscattering and PM_{2.5} information recorded by their measuring network. We appreciate the efforts of the students that participated as volunteers during the monitoring protocols. Datasets for the March and June measurements in 2018 analyzed in Figure 6a and Figure 6b are available at Figshare (<https://doi.org/10.6084/m9.figshare.9791024.v2>). Finally, we want to kindly thank Natalia Cardona, Agustín

Menéndez and Laura Lotero for their generous and disinterested donations during monitoring.

References

- [1] P. Demaio, "Bike-sharing: History, impacts, models of provision, and future," *J. Public Transp.*, vol. 12, no. 4, 2009. [Online]. Available: <http://doi.org/10.5038/2375-0901.12.4.3>
- [2] P. Midgley, "Bicycle-sharing schemes: enhancing sustainable mobility in urban areas," United nations department of economic and social affairs, New York, USA, Tech. Rep. CSD19/2011/BP8, May 2011.
- [3] G. Stewart, N. K. Anokye, and S. Pokhrel, "What interventions increase commuter cycling? A systematic review," *BMJ Open*, vol. 5, no. 8, August 14 2015. [Online]. Available: <https://doi.org/10.1136/bmjopen-2015-007945>
- [4] C. H. V. Cooper, "Using spatial network analysis to model pedal cycle flows, risk and mode choice," *J. Transp. Geogr.*, vol. 58, January 2017. [Online]. Available: <https://doi.org/10.1016/j.jtrangeo.2016.12.003>
- [5] L. Mertens and *et al.*, "Built environmental correlates of cycling for transport across Europe," *Heal. Place*, vol. 44, March 2017. [Online]. Available: <https://doi.org/10.1016/j.healthplace.2017.01.007>
- [6] *Moving Toward Active Transportation: How Policies Can Encourage Walking and Bicycling*, Active Living Research, San Diego, CA, 2016.
- [7] L. Mertens and *et al.*, "Differences in environmental preferences towards cycling for transport among adults: a latent class analysis," *BMC Public Health*, vol. 16, August 12 2016. [Online]. Available: <https://doi.org/10.1186/s12889-016-3471-5>
- [8] L. Mertens and *et al.*, "Perceived environmental correlates of cycling for transport among adults in five regions of Europe," *Obes. Rev.*, vol. 17, January 2016. [Online]. Available: <https://doi.org/10.1111/obr.12379>
- [9] A. Y. Bigazzi and M. A. Figliozzi, "Review of urban bicyclists' intake and uptake of traffic-related air pollution," *Transp. Rev.*, vol. 34, no. 2, April 08 2014. [Online]. Available: <https://doi.org/10.1080/01441647.2014.897772>
- [10] A. Y. Bigazzi, M. A. Figliozzi, W. Luo, and J. F. Pankow, "Breath biomarkers to measure uptake of volatile organic compounds by bicyclists," *Environ. Sci. Technol.*, vol. 50, no. 10, April 20 2016. [Online]. Available: <https://doi.org/10.1021/acs.est.6b01159>
- [11] D. W. Graff and *et al.*, "Exposure to concentrated coarse air pollution particles causes mild cardiopulmonary effects in healthy young adults," *Environ. Health Perspect.*, vol. 117, no. 7, July 2009. [Online]. Available: <https://doi.org/10.1289/ehp0900558>
- [12] M. Tainio and *et al.*, "Can air pollution negate the health benefits of cycling and walking?" *Prev. Med.*, vol. 87, June 2016. [Online]. Available: <https://doi.org/10.1016/j.ypmed.2016.02.002>
- [13] Y. Hao and *et al.*, "Prospective evaluation of respiratory health benefits from reduced exposure to airborne particulate matter," *Int. J. Environ. Health Res.*, vol. 27, no. 2, April 2017. [Online]. Available: <https://doi.org/10.1080/09603123.2017.1292497>
- [14] M. Kampa and E. Castanas, "Human health effects of air pollution," *Environ. Pollut.*, vol. 151, no. 2, January 2008. [Online]. Available: <https://doi.org/10.1016/j.envpol.2007.06.012>
- [15] J. Peters, J. Theunis, M. V. Poppel, and P. Berghmans, "Monitoring PM₁₀ and ultrafine particles in urban environments using mobile measurements," *Aerosol Air Qual. Res.*, vol. 13, 2013. [Online]. Available: <https://doi.org/10.4209/aaqr.2012.06.0152>
- [16] H. Haddad and A. de Nazelle, "The role of personal air pollution sensors and smartphone technology in changing travel behaviour," *J. Transp. Heal.*, vol. 11, December 2018. [Online]. Available: <https://doi.org/10.1016/j.jth.2018.08.001>
- [17] C. Johansson and *et al.*, "Impacts on air pollution and health by changing commuting from car to bicycle," *Sci. Total Environ.*, vol. 584-585, April 15 2017. [Online]. Available: <https://doi.org/10.1016/j.scitotenv.2017.01.145>
- [18] S. Simões, J. Carvalho, M. A. Martins, and C. Pinheiro, "An overview of particulate matter measurement instruments," *Atmosphere*,

- vol. 6, no. 9, September 2015. [Online]. Available: <https://doi.org/10.3390/atmos6091327>
- [19] W. E. Wilson and *et al.*, "Monitoring of particulate matter outdoors," *Chemosphere*, vol. 49, no. 9, December 2002. [Online]. Available: [https://doi.org/10.1016/S0045-6535\(02\)00270-9](https://doi.org/10.1016/S0045-6535(02)00270-9)
- [20] B. R. Gurjar, T. M. Butler, M. G. Lawrence, and J. Lelieveld, "Evaluation of emissions and air quality in megacities," *Atmos. Environ.*, vol. 42, no. 7, March 2008. [Online]. Available: <https://doi.org/10.1016/j.atmosenv.2007.10.048>
- [21] C. Carnevale and *et al.*, "An integrated assessment tool to define effective air quality policies at regional scale," *Environ. Model. Softw.*, vol. 38, December 2012. [Online]. Available: <https://doi.org/10.1016/j.envsoft.2012.07.004>
- [22] [2018] Air pollution. World Health Organization. Accessed Sep. 10, 2019. [Online]. Available: <https://bit.ly/35cbxIM>
- [23] J. Bedoya and E. Martínez, "Calidad del aire en el Valle de Aburrá. Antioquia Colombia," *Rev. Dyna*, vol. 76, no. 158, pp. 7–15, Dec. 2008.
- [24] A. M. Rendón, J. F. Salazar, C. A. Palacio, and V. Wirth, "Temperature inversion breakup with impacts on air quality in urban valleys influenced by topographic shading," *J. Appl. Meteorol. Climatol.*, vol. 54, no. 2, February 2015. [Online]. Available: <https://doi.org/10.1175/JAMC-D-14-0111.1>
- [25] Area Metropolitana del Valle de Aburrá. [2017, Jan. 29] Resolución 1379 de 2017. [Online]. Available: <https://bit.ly/2QogKCP>
- [26] Area Metropolitana del Valle de Aburrá. [2015, November] Plan maestro metropolitano de la bicicleta del valle de aburrá (PMB2030). [Online]. Available: <https://bit.ly/2Xm8Uep>
- [27] M. Gao, J. Cao, and E. Seto, "A distributed network of low-cost continuous reading sensors to measure spatiotemporal variations of PM_{2.5} in Xi'an, China," *Environ. Pollut.*, vol. 199, April 2015. [Online]. Available: <https://doi.org/10.1016/j.envpol.2015.01.013>
- [28] Y. Hu, J. Fan, H. Zhang, X. Chen, and G. Dai, "An estimated method of urban PM_{2.5} concentration distribution for a mobile sensing system," *Pervasive Mob. Comput.*, vol. 25, January 2016. [Online]. Available: <https://doi.org/10.1016/j.pmcj.2015.06.004>
- [29] P. Berghmans and *et al.*, "Exposure assessment of a cyclist to PM₁₀ and ultrafine particles," *Sci. Total Environ.*, vol. 407, no. 4, February 2009. [Online]. Available: <https://doi.org/10.1016/j.scitotenv.2008.10.041>
- [30] F. Corno, T. Montanaro, C. Migliore, and P. Castrogiovanni, "Smartbike: An IoT crowd sensing platform for monitoring city air pollution," *Int. J. Electr. Comput. Eng.*, vol. 7, no. 6, December 2017. [Online]. Available: <https://doi.org/10.11591/ijece.v7i6.pp3602-3612>
- [31] B. Elen and *et al.*, "The aeroflex: A bicycle for mobile air quality measurements," *Sensors*, vol. 13, no. 1, December 2012. [Online]. Available: <https://doi.org/10.3390/s130100221>
- [32] P. B. English, M. J. Richardson, and C. Garzón, "From crowdsourcing to extreme citizen science: Participatory research for environmental health," *Annu. Rev. Public Heal.*, vol. 39, April 2018. [Online]. Available: <https://doi.org/10.1146/annurev-publhealth-040617-013702>
- [33] J. Gabrys, "The becoming environmental of computation. From citizen sensing to planetary computerization," *Tecnoscienza*, vol. 8, no. 1, pp. 5–21, 2017.
- [34] M. Madelin and S. Duché, "Low cost air pollution sensors: New perspectives for the measurement of individual exposure?" in *9th International Conference on Urban Climate*, Toulouse, France, 2015, pp. 1–6.
- [35] [2018] Particle sensing. Shinyei Technology. Accessed Sep. 10, 2019. [Online]. Available: <https://bit.ly/343eghd>
- [36] [2015] The air casting platform. Habitatmap. Accessed Aug. 01, 2017. [Online]. Available: <http://aircasting.org/>
- [37] S. Sousan, K. Koehler, L. Hallett, and T. M. Peters, "Evaluation of consumer monitors to measure particulate matter," *J. Aerosol Sci.*, vol. 107, May 2017. [Online]. Available: <https://doi.org/10.1016/j.jaerosci.2017.02.013>
- [38] A. C. Rai and *et al.*, "End-user perspective of low-cost sensors for outdoor air pollution monitoring," *Sci. Total Environ.*, vol. 607–608, December 2017. [Online]. Available: <https://doi.org/10.1016/j.scitotenv.2017.06.266>
- [39] K. Pearson, "Note on regression and inheritance in the case of two parents," *Proc. R. Soc. London*, vol. 58, pp. 240–242, 1895.
- [40] B. Efron, "Better bootstrap confidence intervals," *J. Am. Stat. Assoc.*, vol. 82, no. 397, pp. 171–185, Mar. 1987.
- [41] Cielómetro c151. Vaisala. Accessed Sep. 20, 2019. [Online]. Available: <https://bit.ly/2QAUZzQ>
- [42] S. Emeis, K. Schäfer, and C. Munkel, "Long-term observations of the urban mixing-layer height with ceilometers," in *IOP Conf. Ser. Earth Environ. Sci.*, Lyngby, Denmark, 2008, pp. 012–027.
- [43] M. Wiegner and *et al.*, "What is the benefit of ceilometers for aerosol remote sensing? an answer from EARLINET," *Atmos. Meas. Tech.*, vol. 7, 2014. [Online]. Available: <https://doi.org/10.5194/amtd-7-2491-2014>
- [44] *Exposure Factors Handbook*, The United States Environmental Protection Agency, Washington, DC, 2011.
- [45] O. A. Fajardo and N. Y. Rojas, "Particulate matter exposure of bicycle path users in a high-altitude city," *Atmos. Environ.*, vol. 46, January 2012. [Online]. Available: <https://doi.org/10.1016/j.atmosenv.2011.09.047>
- [46] A. Y. Watson, R. R. Bates, and D. Kennedy, *Air Pollution, the Automobile, and Public Health*. Washington, US: National Academies Press, 1988.
- [47] S. S. Shapiro and M. B. Wilk, "An analysis of variance test for normality (complete samples)," *Biometrika*, vol. 52, no. 3–4, December 1965. [Online]. Available: <https://doi.org/10.1093/biomet/52.3-4.591>
- [48] J. Kuula and *et al.*, "Applicability of optical and diffusion charging-based particulate matter sensors to urban air quality measurements," *Aerosol Air Qual. Res.*, vol. 19, 2019. [Online]. Available: <https://doi.org/10.4209/aaqr.2018.04.0143>
- [49] L. Herrera, "Caracterización de la capa límite atmosférica en el Valle de Aburrá a partir de la información de sensores remotos y radiosondeos," M.S. thesis, Universidad Nacional de Colombia, Medellín, Colombia, 2015.
- [50] Ministerio de Ambiente y Desarrollo Sostenible. [2017, Nov. 01] Resolución no. 2254. [Online]. Available: <https://bit.ly/37nQ0bB>
- [51] J. W. Cherrie and *et al.*, "Effectiveness of face masks used to protect Beijing residents against particulate air pollution," *Occup. Environ. Med.*, vol. 75, no. 6, June 2018. [Online]. Available: <https://doi.org/10.1136/oemed-2017-104765>
- [52] S. S. Zhou and *et al.*, "Assessment of a respiratory face mask for capturing air pollutants and pathogens including human influenza and rhinoviruses," *J. Thorac. Dis.*, vol. 10, no. 3, March 2018. [Online]. Available: <https://doi.org/10.21037/jtd.2018.03.103>
- [53] K. Ardon, Y. W. Huang, and D. J. Cziczko, "Laboratory studies of collection efficiency of sub-micrometer aerosol particles by cloud droplets on a single-droplet basis," *Atmos. Chem. Phys.*, vol. 15, August 19 2015. [Online]. Available: <https://doi.org/10.5194/acp-15-9159-2015>
- [54] L. Chen, C. Liu, L. Zhang, R. Zou, and Z. Zhang, "Variation in tree species ability to capture and retain airborne fine particulate matter (PM_{2.5})," *Sci. Rep.*, vol. 7, no. 1, June 2017. [Online]. Available: <https://doi.org/10.1038/s41598-017-03360-1>
- [55] B. A. Maher, I. A. M. Ahmed, B. M. Davison, V. Karloukovski, and R. Clarke, "Impact of roadside tree lines on indoor concentrations of traffic-derived particulate matter," *Environ. Sci. Technol.*, vol. 47, no. 23, November 2013. [Online]. Available: <https://doi.org/10.1021/es404363m>
- [56] *Estudio del valor histórico, cultural, paisajístico y evaluación de impactos del componente ambiental para la construcción del tramo 2B-Metroplús en escenarios con y sin proyecto, municipio de Envigado Antioquia*, Metroplús and Universidad Nacional de Colombia, Envigado Antioquia, 2017.