



Journal of applied research and technology

ISSN: 1665-6423

Universidad Nacional Autónoma de México, Instituto de Ciencias Aplicadas y Tecnología

Chiu, Singa Wang; Wu, Hua-Yao; Sung, Peng-Cheng
Optimal hybrid inventory replenishment runtime for a vendor- buyer coordinated system with breakdowns and rework/disposal of nonconforming items
Journal of applied research and technology, vol. 18, no. 4, 2020, pp. 197-213
Universidad Nacional Autónoma de México, Instituto de Ciencias Aplicadas y Tecnología

DOI: <https://doi.org/10.14482/INDES.30.1.303.661>

Available in: <https://www.redalyc.org/articulo.oa?id=47471673006>

- How to cite
- Complete issue
- More information about this article
- Journal's webpage in redalyc.org

UNAM  redalyc.org

Scientific Information System Redalyc
Network of Scientific Journals from Latin America and the Caribbean, Spain and Portugal

Project academic non-profit, developed under the open access initiative



Optimal hybrid inventory replenishment runtime for a vendor- buyer coordinated system with breakdowns and rework/disposal of nonconforming items

Singa Wang Chiu^a • Hua-Yao Wu^b • Peng-Cheng Sung^{c*}

^aDept. of Business Administration, Chaoyang University of Technology, Taichung 413, Taiwan

^bPhysics Dept., College of Liberal Arts and Sciences, State University of New York at Oswego, NY, USA

^cDept. of Industrial Engineering & Management, Chaoyang University of Technology, Taichung,

Received 12 07 2019; accepted 05 27 2020

Available online 08 31 2020

Abstract: Most multinational/transnational manufacturers that own internal supply chains and operate in turbulent world markets apply strategies related to product quality, low-cost, and timely delivery. This study aims to assist such firms with making accurate decisions to enable their competitive strategies and cope with the realities of limited capacity and unreliable equipment. We examine a vendor-buyer coordinated system featuring batch fabrication, outsourcing, quality reassurance, discontinuous deliveries, and an unreliable machine. The system outsources a portion of a lot to reduce manufacturing uptime, and the in-house fabrication system experiences undesirable defective items and Poisson distributed breakdowns. In each cycle, corrective action and rework/disposal of defective stocks are undertaken as these incidents occur, and upon receipt of outsourced products and when the entire batch is quality ensured, it makes multiple deliveries of the end products. Using modeling, formulation, derivation, and an optimization methodology, we obtain the problem's cost function and justify its convexity. We then apply differential calculus and propose a recursive algorithm to derive the problem's optimal replenishment runtime. A numerical illustration is offered to show the applicability of the result that reveals various important system characteristics/capabilities, such as the distinct and combined influences of breakdowns, outsourcing, rework, scrap, and delivery-frequency factors on various system parameters, performance, and optimal runtime. The methods proposed here can facilitate managerial operations planning and strategic decision making in an intra-supply chain setting in practice.

Keywords: Industrial engineering, Replenishment runtime, Breakdown, Outsourcing, Quality reassurance, Vendor-buyer coordinated system, Multiple deliveries

*Corresponding author.

E-mail address: sungpc@cyut.edu.tw (Peng-Cheng Sung).

Peer Review under the responsibility of Universidad Nacional Autónoma de México.

1. Introduction

This study examines a vendor-buyer coordinated system featuring batch fabrication, outsourcing, quality reassurance, discontinuous deliveries, and an unreliable machine. Most real-life manufacturing systems experience unanticipated nonconforming items and breakdowns. As such instances occur, corrective action and rework/disposal of nonconforming items must be undertaken to avoid delay in the fabrication schedule and attain the desired product quality. Vinod and Solberg (1984) examined the single- and multi-stage unreliable fabrication systems using queueing models. The authors derived the exact solution for the queueing model with a single-stage and presented two approximations for the closed network queueing model with multiple stages. Their approximation results/performances were validated/compared against the exact solution in the literature. Groenevelt, Pintelon, and Seidmann (1992) studied an unreliable fabrication facility with safety stocks and batch production, wherein a constant failure rate and random failure-repair time of the facility were assumed. Diverse bounds of service-level were examined to find their impacts on different system variables. A production control discipline was proposed to investigate the relationship between the safety stocks and the renewal process of a particular type of single server queue. The authors also showed how their approaches could be applied to broader decision makings in resource allocation fields. Dohi, Okamura, and Osaki (2001) considered an economic manufacturing quantity (EMQ) model with preventive maintenance, stochastic facility breakdowns, (PM), and safety stocks. Their purpose was to jointly decide the optimal control policies of the PM schedule and the quantities of safety stocks that keep the total cost at a minimum. Besides, the authors found out that both the safety stocks and total cost rise as breakdown rate increases. Chakraborty, Giri, and Chaudhuri (2009) studied the production lot-size problem considering breakdowns and different inspection schedules for a deteriorating process. Corrective action of breakdown situation and preventive maintenance are undertaken accordingly. The authors proposed models based on general shift and various distributions of machine failure and repair times to derive a suboptimal lot-size policy. Numerical examples were offered to show the results' applicability and sensitivity analyses on system performances with/without inspection policy. Goerler and Voß (2016) used a mixed-integer programming approach to explore the capacitated batch-size problem with defective products and rework processes. Various numerical experiments were performed to explore the influences of changes in defective instances on the required computer times for obtaining the optimal batch-size solutions. Additional works (Al-Bahkali & Abbas, 2018; Arun, Lincon, & Prabhakaran, 2019; Ghalme, Mankar, & Bhalerao,

2017; Richter, 1996; Saari & Odelius, 2018; Sarker, Jamal, & Mondal, 2008; Shakoore, Abu Jadayil, Jaber, & Jaber, 2017; Souha, Soufien, & Mtibaa, 2018; Vujosevic, Makajic-Nikolic, & Pavlovic, 2017; Zahraee, Rohani, & Wong, 2018) studied the impact of various characteristics of unreliable facility and rework/disposal of defective products on fabrication systems and operations management.

Production managers apply an outsourcing strategy to effectively reduce fabrication uptime or release in-house facility's workloads. Vining and Globerman (1999) presented a conceptual structure for comprehending the correct and less risky outsourcing decision. Specifically, through identifying the pre- and post-outsourcing risks and implementing certain suggested strategies to avoid or lessen those potential risks in advance (or pre-outsourcing stage). The authors referred to transaction costs in the literature to support their conceptual framework. De Fontenay and Gans (2008) considered a bargaining perception on strategic subcontracting and supply competition, wherein the subcontracting decision of a downstream company and its upstream fabrication resources is involved. The authors portrayed a downstream company has a choice to either subcontract to a reputable upstream company or a new and independent firm. Hence, it faces a trade-off between the higher resource value linked to those who could consolidate upstream capabilities and the lower input costs afforded by an independent competition. The result of their study indicates that outsourcing to an established firm is more beneficial. Rosar (2017) explored the connection between strategic subcontracting and optimal purchase policy. First, a subcontracting choice that relies on a non-cost-savings mechanism was presented and analyzed. Then, the author extended it to a cost-savings relating rationale, with the discussion of the incentives of sellers who employ in nested subcontracting policies. Additional works (Chiu, Liu, & Hwang, 2017; Chiu, Chiu, Lin, & Chang, 2019a; Mohammadi, 2017; Skowronski & Benton, 2018) investigated the impact of distinct outsourcing characteristics on the manufacturing systems and enterprise management.

In real supply-chain environments, the transportation of goods is commonly planned using multi-shipment at specific time intervals. Thomas and Griffin (1996) examined the conventional business processes in the stages of procurement, fabrication, and distribution, and indicated the need for coordinating these stages as a supply chain. The authors suggested taking advantage of recent progress in advance communication technology to place specific emphasis on the effective management of the coordinated supply-chain model to reduce overall operating costs. Swenseth and Godfrey (2002) examined the stock refilling decisions incorporating certain transportation cost functions from the literature and showed that no unnecessary complexity was added to the decision process, nor loss in

accuracy of the decision. [Farsijani, Nikabadi, and Ayough \(2012\)](#) employed the simulated annealing methodology to explore a multiproduct economic production quantity (EPQ) model with discrete shipping orders and space constraints. Their batch- production model also considered realistic factors such as the imperfect manufacturing process, rework of defective stocks, and allowable shortages. The LINGO package helped solve the linear examples, and the simulated annealing methodology assisted in resolving the non-linear combinatorial optimization examples. [Montarelo, Glardon, and Zufferey \(2017\)](#) used the Tabu searching metaheuristic to investigate a four-echelon stock management decision in a decentralized supply chain setting. The authors proposed a global simulation methodology and set different service levels to deal with the market's random demands, to explore/optimize the four-echelon linear/nonlinear supply chains. Their result showed that there are substantial differences among echelons in crucial stock and cost parameters. The authors claimed their approach could be generalized for boarder applications. Additional works ([Arabi, Dehshiri, & Shokrgozar, 2018](#); [Bolaños, Escobar, & Echeverri, 2018](#); [Chiu, Wu, & Tseng, 2019b](#); [Morales, Franco, & Mendez-Giraldo, 2018](#); [Nielsen & Saha, 2018](#); [Paz, Granada-Echeverri, & Escobar, 2018](#); [Puška, Kozarević, Stević, & Stovrag, 2018](#); [Stažnik, Babić, & Bajor, 2017](#); [Zhao, Qian, Nakamura, & Nakagawa, 2018](#)) studied the influence of distinct features of multiple deliveries on various types of manufacturing-transportation and supply-chain systems. Few prior works have investigated the joint influence of breakdowns, outsourcing, multiple deliveries, and rework/disposal of defective stocks on the optimal batch-fabrication runtime decision, this work aims to fill the gap.

2. The proposed model

This study determines the optimal hybrid inventory replenishment runtime for a vendor-buyer coordinated system with the breakdown, outsourcing, multiple deliveries, and rework/disposal of defective items. Suppose the annual demand rate λ of a manufactured product is supplied by a vendor at a fabrication rate of P_1 units per year in a vendor-buyer coordinated system. To shorten fabrication uptime of the batch production plan, the vendor decides to outsource a π portion of the batch size Q (where $0 < \pi < 1$). Thus, $K\pi$ and $C\pi$ denote the fixed and unit costs relating to the vendor's outsourcing policy. The relationship between outsourcing relevant parameters and their corresponding in-house variables is shown as follows:

$$C_\pi = (1 + \beta_2)C \quad (1)$$

$$K_\pi = (1 + \beta_1)K \quad (2)$$

where C and K represent the in-house fabrication unit and setup cost, respectively; and β_2 and β_1 denote the relating ratios between these variables. It is noted that when $\pi = 1$, our model turns into a "buy" rather than "make" model; in contrast, when $\pi = 0$, the proposed model becomes a purely in-house production model.

The in-house fabrication process may produce an x portion of nonconforming items randomly, at a rate d_1 (where $d_1 = xP_1$ and P_1 stands for the in-house manufacturing rate). To prohibit the stock-out situation, we assume that $(P_1 - d_1 - \lambda) > 0$. Careful inspection of the nonconforming items separates the reworkable from the scrap (where the scrap ratio θ_1 among the nonconforming is assumed). In each batch fabrication cycle, a rework process immediately follows the regular manufacturing process, at a reworking rate of P_2 and an extra cost C_R is associated with each reworked item. Also, we assume an imperfect rework process, a scrap ratio θ_2 among the reworked items exists. Hence, the overall scrap rate is φ (which sums up to $(\theta_1 + (1 - \theta_1)\theta_2)$ in each cycle, and all scraps are disposed with unit disposal cost C_S . As to the outsourced products, we assume that their quality is guaranteed by the outside provider, and they are scheduled to be received at the end of the in-house rework process, before the beginning of the delivery time of finished goods.

Moreover, the in-house production machine is not reliable, it is subject to random failure (which follows the Poisson distribution, with β as mean per year). When a failure occurs (as shown in subsection 2.1), a specific abort/resume stock controlling policy is used. Its guideline is to instantly repair the failure and promptly resume fabrication of the interrupted/unfinished lot when the machine is restored. A constant failure repair time t_r is assumed; in case that actual repair time is greater than t_r , a piece of rental equipment will be put in use to avoid further delay in production. Upon completion of the fabrication and rework processes, and receipt of outsourced items, n equal-size installments of the lot are shipped to the buyer at fixed time interval $t'_{n\pi}$ during distribution time $t'_{3\pi}$. The additional notation used in this study is listed below.

t - time before a random failure occurs (in years),

Q - batch size,

M - machine repair cost,

$t_{1\pi}$ - uptime in the proposed hybrid replenishment vendor-buyer coordinated system with random failure and quality assurance – the decision variable,

$t'_{2\pi}$ - rework time in the failure occurrence case,

$T_{1\pi}$ - cycle length in the failure occurrence case,

d_2 - production rate of scrap items during $t'_{2\pi}$,

h - perfect item's unit holding cost,

h_1 - reworked item's unit holding cost,

h_2 - buyer stock's unit holding cost,
 h_3 - safety stock's unit holding cost,
 C_1 - safety stock's unit cost,
 C_T - unit transportation cost,
 K_1 - fixed transportation cost,
 g - t_r , fixed machine repair time,
 D - quantity per delivery,
 I -the leftover stocks in each delivery time interval,
 H_0 - level of perfect stocks when a failure occurs,
 H_1 - level of perfect stocks when the fabrication process ends,
 H_2 - level of perfect stocks when the rework process ends,
 H - level of perfect stocks after receipt of outsourced items,
 $I(t)$ - level of perfect stocks at time t ,
 $I_F(t)$ - level of safety stocks at time t ,
 $I_d(t)$ - level of nonconforming stocks at time t ,
 $I_s(t)$ - level of scrap at time t ,
 $I_c(t)$ - level of buyer's stocks at time t ,
 $TC(t_{1\pi})_1$ =total system cost per cycle in the failure occurrence case,
 $E[TC(t_{1\pi})_1]$ = the expected total system cost per cycle in the failure occurrence case,
 $E[T'_\pi]$ = the expected cycle length in the failure occurrence case,
 $t_{2\pi}$ - rework time in the case of no failure occurrence,
 $t_{3\pi}$ - stock delivery time in the case of no failure occurrence,
 $t_{n\pi}$ time interval between any two deliveries in the case of no failure occurrence,
 T_π cycle length in the case of no failure occurrence,
 $TC(t_{1\pi})_2$ = total system cost per cycle in the case of no failure occurrence,
 $E[TC(t_{1\pi})_2]$ = the expected total system cost per cycle in the case of no failure occurrence,
 $E[TCU(t_{1\pi})]$ = the expected system cost per unit time for the proposed system with or without failure occurrence,
 $E[T'_\pi]$ = the expected cycle length in the case of no failure occurrence,
 t_1 - uptime for the proposed system without breakdown, nor outsourcing,
 t_2 - rework time for the proposed system without breakdown, nor outsourcing,
 t_3 - delivery time for the proposed system without breakdown, nor outsourcing,
 T - cycle length for the proposed system without breakdown, nor outsourcing,
 T_π - replenishment cycle length for the proposed system with or without failure occurrence.

The following subsections examine two distinct cases due to the random failure in the proposed model:

2.1. Case 1: A random failure occurs during fabrication uptime

2.1.1. During the fabrication process of Case 1

Figure 1 shows the level of perfect inventories in this case (i.e., $t < t_{1\pi}$), wherein at the time when a failure happens, the level of inventory reaches H_0 and once the failure is repaired, it continues to pile up to H_1 at the end of uptime and reaches H_2 at the end of rework process. Then, the outsourced items are received and the level of the perfect stock reaches to H , before the beginning of product distribution time $t'_{3\pi}$.

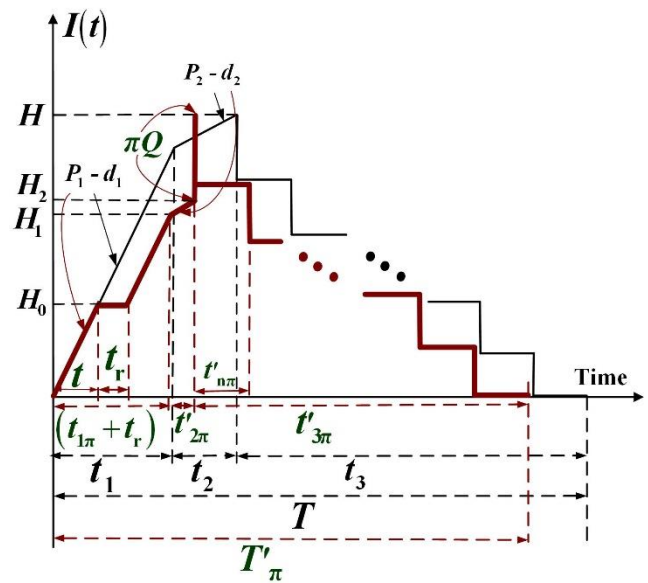


Figure 1. Level of perfect inventories in the proposed hybrid inventory replenishment vendor-buyer coordinated system with random breakdown and quality reassurance (in brown) as compared to the proposed system without breakdown, nor outsourcing (in black).

Figure 2 displays the on-hand level of safety stock in the proposed system. It indicates that in the failure occurrence case, the safety stock will be added to the finished batch and delivered in $t'_{3\pi}$ for meeting extra buyer's demand during t_r .

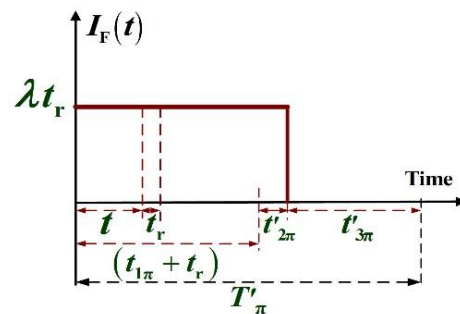


Figure 2. Level of safety stock in the proposed system with breakdown occurrence.

Figures 3 and 4 illustrate the levels of nonconforming and scrap items in the proposed system with failure occurrence, respectively.

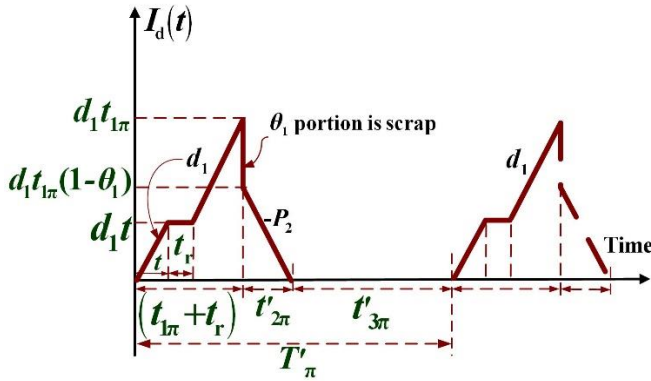


Figure 3. Level of nonconforming items in the proposed system with breakdown occurrence.

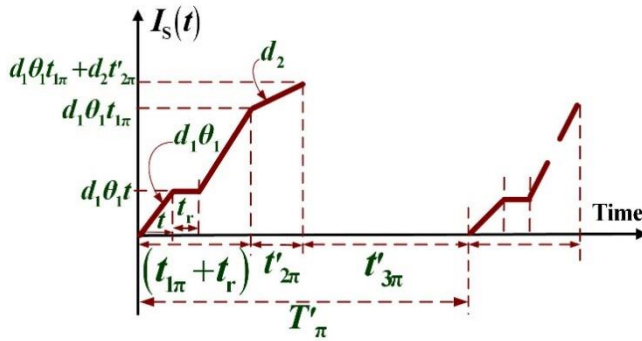


Figure 4. Level of scrap items in the proposed system with breakdown occurrence.

Based on the aforementioned description of the in-house fabrication process, one can observe the following straightforward equations (please refer to Figures 1 to 5):

$$T'_\pi = t_{1\pi} + t_r + t'_{2\pi} + t'_{3\pi} \quad (3)$$

$$t_{1\pi} = \frac{Q(1-\pi)}{P_1} = \frac{H_1}{P_1 - d_1} \quad (4)$$

$$t'_{2\pi} = \frac{[(1-\pi)Q](x)(1-\theta_1)}{P_2} \quad (5)$$

$$t'_{3\pi} = T'_\pi - (t_{1\pi} + t_r + t'_{2\pi}) \quad (6)$$

$$H_0 = (P_1 - d_1)t \quad (7)$$

$$H_1 = (P_1 - d_1)t_{1\pi} \quad (8)$$

$$H_2 = H_1 + (P_2 - d_2)t'_{2\pi} \quad (9)$$

$$d_1 t_{1\pi} = x(P_1 t_{1\pi}) = x[(1-\pi)Q] \quad (10)$$

$$\phi x[(1-\pi)Q] = [\theta_1 + (1-\theta_1)\theta_2]x[(1-\pi)Q]. \quad (11)$$

2.1.2. During the delivery time of Case 1

Total delivery quantity H at the beginning of product distribution time $t'_{3\pi}$ must include λt_r as shown in Eq. (12). Total inventories during the product distribution time $t'_{3\pi}$ (Chiu et al., 2019b) is exhibited in Eq. (13).

$$H = H_2 + \pi Q + \lambda t_r \quad (12)$$

$$\left(\frac{1}{n^2}\right) \left(\sum_{i=1}^{n-1} i\right) H(t'_{3\pi}) = \left(\frac{1}{n^2}\right) \left[\frac{n(n-1)}{2}\right] H(t'_{3\pi}) = \left(\frac{n-1}{2n}\right) H(t'_{3\pi}) \quad (13)$$

2.1.3. The status of buyer's stocks in Case 1

Total inventories at the buyer side during the cycle length T'_π can be calculated (Chiu et al., 2019b) as shown in Eq. (14).

$$n(t'_{n\pi}) \left(D - \frac{\lambda(t'_{n\pi})}{2}\right) + \frac{n(n-1)}{2} I(t'_{n\pi}) + \frac{nl}{2} (t_{1\pi} + t'_{2\pi}) = \frac{1}{2} \left[\frac{Ht'_{3\pi}}{n} + (H - \lambda t'_{3\pi})T'_\pi\right] \quad (14)$$

2.1.4. Total cost per cycle for Case 1

Total cost per cycle in failure occurrence case, $TC(t_{1\pi})_1$ comprises both the variable and fixed outsourcing and in-house fabrication costs, machine repaired cost, safety stock relevant costs (see Fig. 2), both fixed and variable shipping costs, rework and disposal costs, and total holding costs (including perfect items, nonconforming and reworked items, and buyer's stocks) during the entire cycle, as shown in Eq. (15).

$$TC(t_{1\pi})_1 = C_\pi(\pi Q) + K_\pi + C[(1-\pi)Q] + K + M + C_1(\lambda t_r) + h_3(\lambda t_r)(t_{1\pi} + t_r + t'_{2\pi}) + nK_1 + C_T[Q(1-\phi x(1-\pi)) + \lambda t_r] + C_R x[(1-\pi)Q](1-\theta_1) + C_S \phi x[(1-\pi)Q] + h \left[\frac{H_1 + d_1 t_{1\pi}}{2} (t_{1\pi}) + (H_0 t_r) + (d_1 t) t_r + \frac{H_1 + H_2}{2} (t'_{2\pi}) + \left(\frac{n-1}{2n}\right) H t'_{3\pi} \right] + h_1 \frac{P_2 t'_{2\pi}}{2} (t'_{2\pi}) + \frac{h_2}{2} \left[\frac{H t'_{3\pi}}{n} + (H - \lambda t'_{3\pi})T'_\pi \right] \quad (15)$$

Substitute equations (1) to (14) in Eq. (15), and use the expected value to cope with the randomness of x , the expected total system cost per cycle in the failure occurrence case $E[TC(t_{1\pi})_1]$ can be derived as follows:

$$\begin{aligned}
E[TC(t_{1\pi})_1] = & C_\pi \left[\frac{\pi t_{1\pi} P_1}{(1-\pi)} \right] + K_\pi + C(t_{1\pi} P_1) + K + M \\
& + nK_1 + C_T \left[\frac{t_{1\pi} P_1}{(1-\pi)} y_0 + \lambda g \right] + C_1 \lambda g \\
& + h_3 \left[\lambda g t_{1\pi} + \lambda g^2 + \frac{\lambda g E[x] t_{1\pi} P_1 (1-\theta_1)}{P_2} \right] \\
& + C_R E[x] t_{1\pi} P_1 (1-\theta_1) + C_S E[x] \phi t_{1\pi} P_1 \\
& + h[P_1 t g] \\
& + \frac{E[x]^2 t_{1\pi}^2 P_1^2 (1-\theta_1)}{2P_2} [h_1(1-\theta_1) - h] \\
& + \frac{t_{1\pi}^2 P_1^2}{2n\lambda(1-\pi)} [h_2 - h] y_0 (y_1 - y_2) \\
& + h \left[\frac{g t_{1\pi} P_1}{2} (y_1 - y_2) \right] \\
& + \frac{h t_{1\pi}^2 P_1^2}{2\lambda(1-\pi)} \left\{ \frac{y_0^2}{(1-\pi)} \right. \\
& + \frac{\lambda [E[x]\phi(1-\pi) - \pi]}{P_1} \\
& + \left. \frac{\lambda E[x](1-\theta_1)(1-2\pi)}{P_2} \right\} + h_2 \left[\frac{\lambda g^2}{2} \right] \\
& + h_2 \left[\frac{g t_{1\pi} P_1}{2} (y_1 + y_2) \right] + \frac{h_2 t_{1\pi}^2 P_1^2}{2(1-\pi)} y_0 \left(\frac{y_2}{\lambda} \right) \\
& + (h_2 - h) \left[\frac{g t_{1\pi} P_1}{2n} (y_1 - y_2) \right]
\end{aligned} \quad (16)$$

where

$$\begin{aligned}
y_0 &= [1 - E[x]\phi(1-\pi)], y_1 = \left[\frac{1}{(1-\pi)} - E[x]\phi \right], \\
y_2 &= \left[\frac{\lambda}{P_1} + \frac{\lambda E[x](1-\theta_1)}{P_2} \right]
\end{aligned}$$

2.2. Case 2: No machine failure occurrence during fabrication uptime

Figure 5 displays the level of perfect inventories in this case (i.e., $t \geq t_{1\pi}$). Since no failure occurs, the inventory level goes up to H_1 when uptime ends and it reaches H_2 when rework is completed. Upon receipt of the outsourced items, the level of perfect inventories reaches H , before the beginning of product distribution time $t_{3\pi}$.

Since no machine failure occurs, the safety stock remains unused throughout the cycle length T_π . The following straightforward equations for this no failure occurrence case can be directly observed:

$$T_\pi = t_{1\pi} + t_{2\pi} + t_{3\pi} \quad (17)$$

$$t_{1\pi} = \frac{Q(1-\pi)}{P_1} = \frac{H_1}{P_1 - d_1} \quad (18)$$

$$t_{2\pi} = \frac{[(1-\pi)Q](x)(1-\theta_1)}{P_2} \quad (19)$$

$$t_{3\pi} = T_\pi - (t_{1\pi} + t_{2\pi}) \quad (20)$$

$$H_1 = (P_1 - d_1)t_{1\pi} \quad (21)$$

$$H_2 = H_1 + (P_2 - d_2)t_{2\pi} \quad (22)$$

$$H = H_2 + \pi Q \quad (23)$$

Equations (10) and (11) remain valid in this case, and the inventories in distribution time $t_{3\pi}$ and at the buyer side in T_π can be computed using formulas shown in Eqs. (24) and (25) (Chiu et al., 2019b).

$$\left(\frac{1}{n^2} \right) \left(\sum_{i=1}^{n-1} i \right) H(t_{3\pi}) = \left(\frac{1}{n^2} \right) \left[\frac{n(n-1)}{2} \right] H(t_{3\pi}) = \left(\frac{n-1}{2n} \right) H(t_{3\pi}) \quad (24)$$

$$\frac{1}{2} \left[\frac{H(t_{3\pi})}{n} + (H - \lambda(t_{3\pi}))T_\pi \right] \quad (25)$$

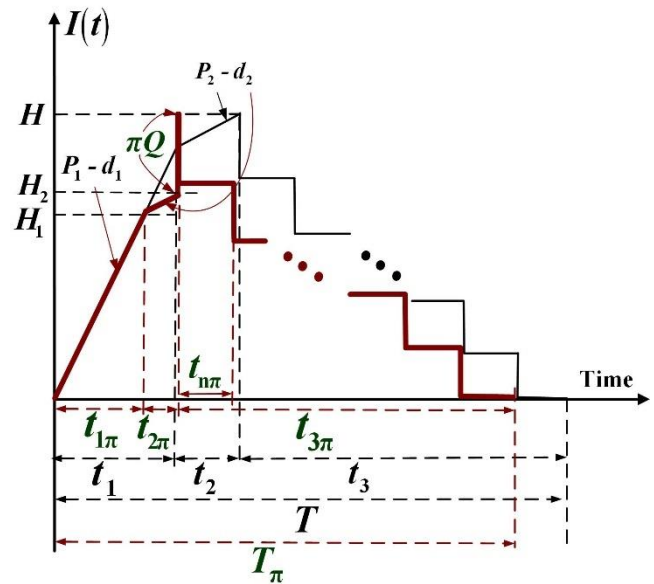


Figure 5. Level of perfect inventories in the proposed hybrid inventory replenishment vendor-buyer coordinated system with quality reassurance, but no machine breakdown (in brown) as compared to the same system without outsourcing option (in black).

2.2.1. Total cost per cycle for Case 2

Total cost per cycle in no failure occurrence case, $TC(t_{1\pi})_2$ comprises both the variable and fixed outsourcing and in-house fabrication costs, safety stock holding cost (see Fig. 8), rework and disposal costs, transportation costs (both variable and fixed costs), and total holding costs (including reworked, perfect items, and nonconforming items, and buyer's stocks) during the entire cycle, as shown in Eq. (26).

$$TC(t_{1\pi})_2 = C_\pi(\pi Q) + K_\pi + C[(1-\pi)Q] + K + h_3(\lambda t_r)T_\pi + C_T[Q(1-\phi x(1-\pi))] + nK_1 + C_R x[(1-\pi)Q](1-\theta_1) + C_S \phi x[(1-\pi)Q] + h_1 \frac{P_2 t_{2\pi}}{2}(t_{2\pi}) + h \left[\frac{H_1 + d_1 t_{1\pi}}{2}(t_{1\pi}) + \frac{H_1 + H_2}{2}(t_{2\pi}) + \left(\frac{n-1}{2n}\right) H t_{3\pi} \right] + \frac{h_2}{2} \left[\frac{H t_{3\pi}}{n} + (H - \lambda t_{3\pi}) T_\pi \right] \quad (26)$$

Substitute equations (17) to (25) and (10) to (11) in Eq. (26), and use the expected value to cope with the randomness of x , the expected total system cost per cycle for case 2, $E[TC(t_{1\pi})_2]$ can be derived as follows:

$$\begin{aligned} E[TC(t_{1\pi})_2] = & C_\pi \left[\frac{\pi t_{1\pi} P_1}{(1-\pi)} \right] + K_\pi + C(t_{1\pi} P_1) + K \\ & + C_R E[x] t_{1\pi} P_1 (1-\theta_1) \\ & + C_S E[x] \phi t_{1\pi} P_1 + nK_1 \\ & + C_T \left[\frac{t_{1\pi} P_1 y_0}{(1-\pi)} \right] \\ & + \frac{E[x]^2 t_{1\pi}^2 P_1^2 (1-\theta_1)}{2P_2} [h_1 (1-\theta_1) \\ & - h] + \frac{h_2 t_{1\pi}^2 P_1^2}{2(1-\pi)} \left(\frac{y_0 y_2}{\lambda} \right) \\ & + \frac{t_{1\pi}^2 P_1^2 y_0 (h_2 - h)}{2n\lambda(1-\pi)} (y_1 - y_2) \\ & + \frac{h t_{1\pi}^2 P_1^2}{2\lambda(1-\pi)} \left\{ \frac{y_0^2}{(1-\pi)} \right. \\ & + \frac{\lambda[E[x]\phi(1-\pi) - \pi]}{P_1} \\ & + \left. \frac{\lambda E[x](1-\theta_1)(1-2\pi)}{P_2} \right\} \\ & + h_3 \left[g \frac{t_{1\pi} P_1}{(1-\pi)} y_0 \right] \end{aligned} \quad (27)$$

3. Solution processes to the problem

Because of the assumption of Poisson distributed failure rate β per year, the time to failure obeys an Exponential distribution with $f(t) = \beta e^{-\beta t}$ (i.e., the density function) and $F(t) = (1 - e^{-\beta t})$ (i.e., the cumulative density function). Also, since the scrap rate ϕ is random, hence, the cycle length is not constant. The renewal reward theorem is employed to cope with the variable cycle length. Therefore, $E[TCU(t_{1\pi})]$ can be computed as follows:

$$E[TCU(t_{1\pi})] = \frac{\left\{ \int_0^{t_{1\pi}} E[TC(t_{1\pi})_1] \cdot f(t) dt + \int_{t_{1\pi}}^\infty E[TC(t_{1\pi})_2] \cdot f(t) dt \right\}}{E[T_\pi]} \quad (28)$$

where $E[T_\pi]$, $E[T'_\pi]$, and $E[T_\pi]$ represent the following:

$$E[T_\pi] = \int_0^{t_{1\pi}} E[T'_\pi] \cdot f(t) dt + \int_{t_{1\pi}}^\infty E[T_\pi] \cdot f(t) dt \quad (29)$$

$$E[T'_\pi] = \frac{Q[1-\phi \cdot E[x](1-\pi)] + \lambda t_r}{\lambda} = \frac{t_{1\pi} P_1 \left[\frac{1}{(1-\pi)} - \phi \cdot E[x] \right] + \lambda t_r}{\lambda} \quad (30)$$

$$E[T_\pi] = \frac{Q[1-\phi \cdot E[x](1-\pi)]}{\lambda} = \frac{t_{1\pi} P_1 \left[\frac{1}{(1-\pi)} - \phi \cdot E[x] \right]}{\lambda} \quad (31)$$

Substitute formulas (16), (27), and (29) in formula (28), along with extra efforts in derivations, one can obtain $E[TCU(t_{1\pi})]$ as follows (for details please refer to Appendix A):

$$E[TCU(t_{1\pi})] = \left[\frac{\lambda}{y_1 + \frac{\lambda g [1 - e^{-\beta t_{1\pi}}]}{t_{1\pi} P_1}} \right] \left(\frac{W_0}{t_{1\pi}} + \frac{W_1}{t_{1\pi}} + W_2 + t_{1\pi} W_5 - h g e^{-\beta t_{1\pi}} \right) + \left(\frac{W_3 e^{-\beta t_{1\pi}}}{t_{1\pi}} + W_4 - W_4 e^{-\beta t_{1\pi}} \right) \quad (32)$$

The first and second derivatives of $E[TCU(t_{1\pi})]$ are shown in equations (B-1) and (B-2) in Appendix B. Since the first term on the right-hand side (RHS) of Eq. (B-2) is positive, it follows that the $E[TCU(t_{1\pi})]$ is convex if the second term on the RHS of Eq. (B-2) is also positive. That means if $\gamma(t_{1\pi}) > t_{1\pi} > 0$ holds (see Eq. (B-3) for details).

Once Eq. (B-3) is verified to be true, we can solve the optimal $t_{1\pi}^*$ by setting the first derivative of $E[TCU(t_{1\pi})] = 0$ (refer to Eq. (B-1)). Since the first term on the RHS of Eq. (B-1) is positive, we obtain the following:

$$\left\{ \begin{aligned} & [(hg + W_4)P_1(y_1 P_1 \beta e^{-\beta t_{1\pi}}) + W_5 P_1(y_1 P_1 - \lambda g \beta e^{-\beta t_{1\pi}})] t_{1\pi}^2 \\ & + [W_3 P_1(-y_1 P_1 \beta e^{-\beta t_{1\pi}}) + W_5 P_1(2\lambda g - 2\lambda g e^{-\beta t_{1\pi}}) + (hg - W_2)P_1 \lambda g (\beta e^{-\beta t_{1\pi}})] t_{1\pi} \\ & - (W_0 + W_1)P_1(y_1 P_1 + \lambda g \beta e^{-\beta t_{1\pi}}) + W_3 P_1(-\lambda g \beta e^{-\beta t_{1\pi}} - y_1 P_1 e^{-\beta t_{1\pi}}) \\ & - (hg + W_4)P_1 \lambda g (-e^{-2\beta t_{1\pi}} + e^{-\beta t_{1\pi}}) - (W_2 + W_4)P_1 \lambda g (e^{-\beta t_{1\pi}} - 1) \end{aligned} \right\} = 0 \quad (33)$$

Let z_0 , z_1 , and z_2 represent the following:

$$\begin{aligned} z_0 &= [(hg + W_4)P_1(y_1P_1\beta e^{-\beta t_{1\pi}}) + W_5P_1(y_1P_1 - \lambda g\beta e^{-\beta t_{1\pi}})] \\ z_1 &= [W_3P_1(-y_1P_1\beta e^{-\beta t_{1\pi}}) + W_5P_1(2\lambda g - 2\lambda g e^{-\beta t_{1\pi}}) + (hg - W_2)P_1\lambda g(\beta e^{-\beta t_{1\pi}})] \\ z_2 &= -(W_0 + W_1)P_1(y_1P_1 + \lambda g\beta e^{-\beta t_{1\pi}}) + W_3P_1(-\lambda g\beta e^{-\beta t_{1\pi}} - y_1P_1e^{-\beta t_{1\pi}}) \\ &\quad - (hg + W_4)P_1\lambda g(-e^{-2\beta t_{1\pi}} + e^{-\beta t_{1\pi}}) - (W_2 + W_4)P_1\lambda g(e^{-\beta t_{1\pi}} - 1) \end{aligned}$$

Then, we can rearrange Eq. (33) as follows:

$$z_0(t_{1\pi})^2 + z_1(t_{1\pi}) + z_2 = 0 \quad (34)$$

Apply the square roots solution, $t_{1\pi}^*$ can be found as follows:

$$t_{1\pi}^* = \frac{-z_1 \pm \sqrt{z_1^2 - 4z_0z_2}}{2z_0} \quad (35)$$

As the cumulative density function of Exponential distribution $F(t_{1\pi}) = (1 - e^{-\theta t_{1\pi}})$ is throughout for $[0,1]$, so does its complement $e^{-\theta t_{1\pi}}$. Moreover, Eq. (33) can be rearranged as follows:

$$e^{-\beta t_{1\pi}} = \frac{-W_5t_{1\pi}P_1(y_1P_1 - 2\lambda g) + (W_0 + W_1)P_1^2y_1 - (W_2 + W_4)P_1\lambda g}{\left\{ \begin{aligned} &(hg + W_4)P_1^2y_1\beta t_{1\pi}^2 + [-W_3P_1^2y_1\beta - W_5t_{1\pi}P_1\lambda g\beta + (hg - W_2)P_1\lambda g\beta]t_{1\pi} \\ &- [(W_2 + W_4)P_1\lambda g] - [(hg + W_4)P_1\lambda g(1 - e^{-\beta t_{1\pi}})] - 2W_5t_{1\pi}P_1\lambda g \\ &- [(W_0 + W_1)P_1(\lambda g\beta)] + [W_3P_1(-\lambda g\beta - y_1P_1)] \end{aligned} \right\}} \quad (36)$$

To solve the optimal $t_{1\pi}^*$, we start with letting $e^{-\beta t_{1\pi}} = 0$ and $e^{-\beta t_{1\pi}} = 1$, then compute Eq. (35) to find the bounds for $t_{1\pi}$ (i.e., $t_{1\pi U}$ and $t_{1\pi L}$). Next step use present $t_{1\pi U}$ and $t_{1\pi L}$ to compute and obtain update values of $e^{-\beta t_{1\pi}}$ and $e^{-\beta t_{1\pi}}$. Re-compute Eq. (35) using the current $e^{-\beta t_{1\pi}}$ and $e^{-\beta t_{1\pi}}$ to obtain the update bounds $t_{1\pi U}$ and $t_{1\pi L}$. If $(t_{1\pi U} = t_{1\pi L})$ holds, then, $t_{1\pi}^*$ is derived (i.e., $t_{1\pi}^* = t_{1\pi U} = t_{1\pi L}$); otherwise, repeat the above-mentioned steps, until it holds.

4. Numerical example

The following numerical example demonstrates the applicability of our obtained result. The assumed values of system variables in this example are shown in Table 1.

Table 1. Assumed of values of system variables

β	K_1	C_{π}	λ	C	C_1	β_2	P_1	K_{π}	C_R	K	C_S	C_T	h_2
1	90	2.8	4000	2.0	2.0	0.4	10000	60	1.0	200	0.3	0.01	1.6
π	n	θ_1	M	θ_2	h_3	β_1	P_2	x	ϕ	g	h	h_1	
0.4	3	0.3	2500	0.3	0.4	-0.70	5000	20%	0.51	0.018	0.4	0.4	

First, we verify if $E[TCU(t_{1\pi})]$ is convex (i.e., whether Eq. (B-3) holds). Since $e^{-\theta t_{1\pi}}$ falls within the interval of $[0, 1]$, let $e^{-\theta t_{1\pi}} = 0$ and $e^{-\theta t_{1\pi}} = 1$, and apply Eq. (35) to gain $t_{1\pi U} = 0.2875$ and $t_{1\pi L} = 0.0909$ initially. Then, use $t_{1\pi U}$ and $t_{1\pi L}$ to calculate $e^{-\theta t_{1\pi U}}$ and $e^{-\theta t_{1\pi L}}$. Finally, apply Eq. (B-3) with the present values of $e^{-\theta t_{1\pi U}}$, $e^{-\theta t_{1\pi L}}$, $t_{1\pi U}$, and $t_{1\pi L}$ to confirm that $\gamma(t_{1\pi L}) = 0.3103 > t_{1\pi L} = 0.0909 > 0$ and $\gamma(t_{1\pi U}) = 0.5320 > t_{1\pi U} = 0.2875 > 0$, respectively. Therefore, the convexity of $E[TCU(t_{1\pi})]$ is assured for $\beta = 1.0$, and optimal $t_{1\pi}^*$ exists. Additionally, a wider range of β values have been used to test for convexity of $E[TCU(t_{1\pi})]$ to

demonstrate the boarder applicability of the obtained result from this study (see Table 2)

To solve the optimal $t_{1\pi}^*$, we start with letting $e^{-\theta t_{1\pi}} = 0$ and $e^{-\theta t_{1\pi}} = 1$ and apply Eq. (35) to gain the bounds for $t_{1\pi}$ (i.e., $t_{1\pi U} = 0.2875$ and $t_{1\pi L} = 0.0909$). Next, we repeatedly use resent $t_{1\pi U}$ and $t_{1\pi L}$ to compute and update values of $e^{-\theta t_{1\pi U}}$ and $e^{-\theta t_{1\pi L}}$, and re-compute Eq. (35) using current $e^{-\theta t_{1\pi U}}$ and $e^{-\theta t_{1\pi L}}$ until $t_{1\pi U} = t_{1\pi L} = t_{1\pi}^*$. Table 3 exhibits the step-by-step results for searching $t_{1\pi}^*$. Therefore, the optimal uptime for this example $t_{1\pi}^* = 0.1224$ and $E[TCU(t_{1\pi}^*)] = \$12,542.25$.

Table 2. Verification of convexity of $E[TCU(t_{1\pi})]$ against different β_s .

β	$\gamma(t_{1\pi U})$	$t_{1\pi U}$	$\gamma(t_{1\pi L})$	$t_{1\pi L}$
10	0.7927	0.2844	0.0467	0.0216
8	0.6141	0.2845	0.0573	0.0263
6	0.4998	0.2847	0.0744	0.0336
5	0.4621	0.2848	0.0874	0.0389
4	0.4370	0.2850	0.1060	0.0461
3	0.4268	0.2853	0.1346	0.0561
2	0.4415	0.2858	0.1851	0.0703
1	0.5320	0.2875	0.3103	0.0909
0.5	0.7277	0.2909	0.5215	0.1044
0.01	6.0228	0.5277	5.6043	0.1200

Table 3. Step-by-step results for searching $t_{1\pi}^*$.

Step #	$t_{1\pi U}$	$e^{-\beta t_{1\pi U}}$	$t_{1\pi L}$	$e^{-\beta t_{1\pi L}}$	$t_{1\pi U} - t_{1\pi L}$	$E[TCU(t_{1\pi U})]$	$E[TCU(t_{1\pi L})]$
-	-	0	-	1	-	-	-
1	0.2875	0.7501	0.0909	0.9131	0.1966	\$13,371.17	\$12,637.28
2	0.1539	0.8573	0.1151	0.8913	0.0388	\$12,598.72	\$12,546.23
3	0.1292	0.8788	0.1207	0.8863	0.0085	\$12,545.38	\$12,542.44
4	0.1239	0.8835	0.1220	0.8851	0.0019	\$12,542.41	\$12,542.26
5	0.1227	0.8845	0.1223	0.8849	0.0004	\$12,542.26	\$12,542.25
6	0.1224	0.8848	0.1224	0.8848	0.0000	\$12,542.25	\$12,542.25

4.1. Impact of core system feature on the problem

The convexity of $E[TCU(t_{1\pi})]$ and the initial bounds for $t_{1\pi}$ is exhibited in Figure 6.

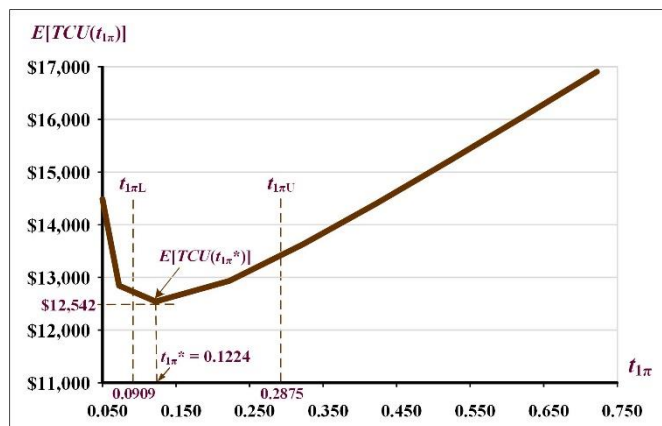
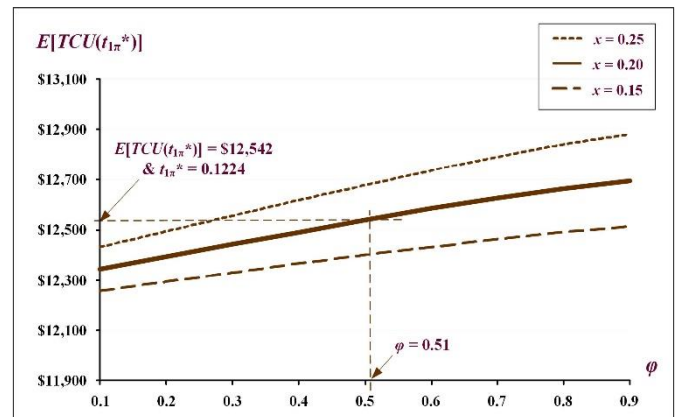
Figure 6. The convexity of $E[TCU(t_{1\pi})]$ and the initial bounds for $t_{1\pi}$.

Figure 7 illustrates the impact of variations in ϕ along with various x values on $E[TCU(t_{1\pi}^*)]$. It indicates that as both ϕ and x rise, $E[TCU(t_{1\pi}^*)]$ increases noticeably.

Figure 7. The impact of variations in ϕ along with various x values on $E[TCU(t_{1\pi}^*)]$.

The influence of changes in mean-time-to-breakdown $1/\beta$ on $E[TCU(t_{1\pi}^*)]$ is displayed in Figure 8. It shows our optimal solution $E[TCU(t_{1\pi}^*)] = \$12,542$ (for $x = 0.2$ and $n = 3$), it also specifies that as $1/\beta$ increases to over 0.17, $E[TCU(t_{1\pi}^*)]$ begins to decline significantly; and as $1/\beta$ rises to extremely large (e.g., $1/\beta \geq 100$), $E[TCU(t_{1\pi}^*)] = \$11,962$ (i.e., the same result as what is obtained from a problem without breakdown occurrence).

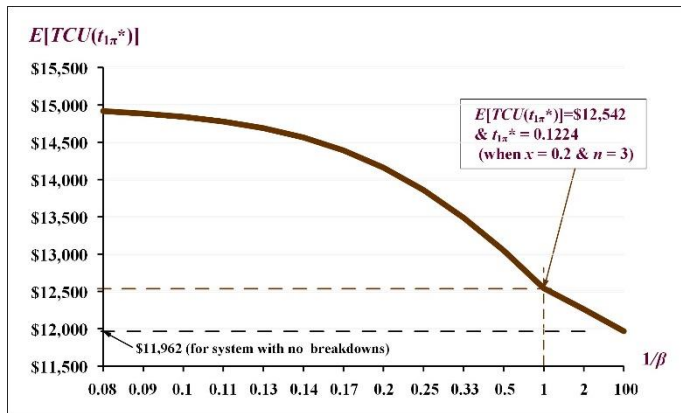


Figure 8. The influence of changes in $1/\beta$ on $E[TCU(t_{1\pi}^*)]$

The impact of differences in the number of deliveries n (per cycle) on $E[TCU(t_{1\pi}^*)]$ is depicted in Figure 9. It shows our optimal solution given $n = 3$, it also indicates that when $n = 2$ we have the minimal $E[TCU(t_{1\pi}^*)]$, and as n increases, $E[TCU(t_{1\pi}^*)]$ goes up significantly.

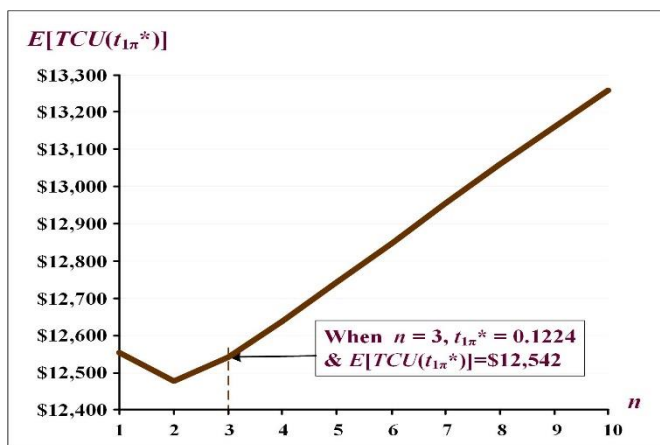


Figure 9. The impact of differences in the number of deliveries n on $E[TCU(t_{1\pi}^*)]$.

The effect of variations in the outsourcing portion π on utilization is demonstrated in Figure 10. It shows that utilization noticeably decreases as π increases; and for $\pi = 0.4$ (as we assumed in our example), utilization declines from 47.72% to 28.11%.

The breakup of $E[TCU(t_{1\pi}^*)]$ of our example is exhibited in Figure 11. It reveals the sum of outsourcing relevant setup and variable costs is 37.7%; total in-house relevant costs are 51.1% (including quality and breakdown related expenses), and supply chain relevant cost (including delivery and buyer's holding costs) adds up to 11.2%.

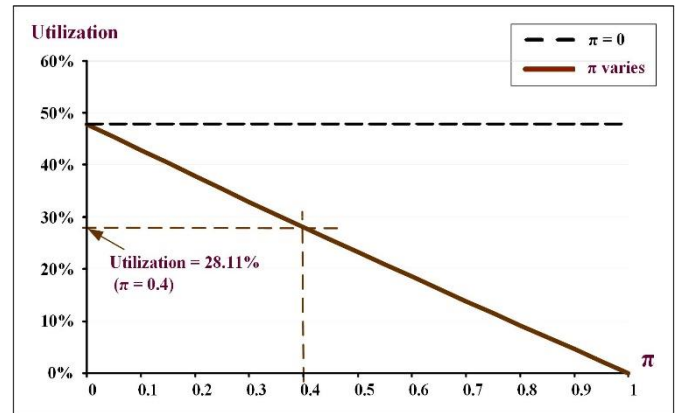


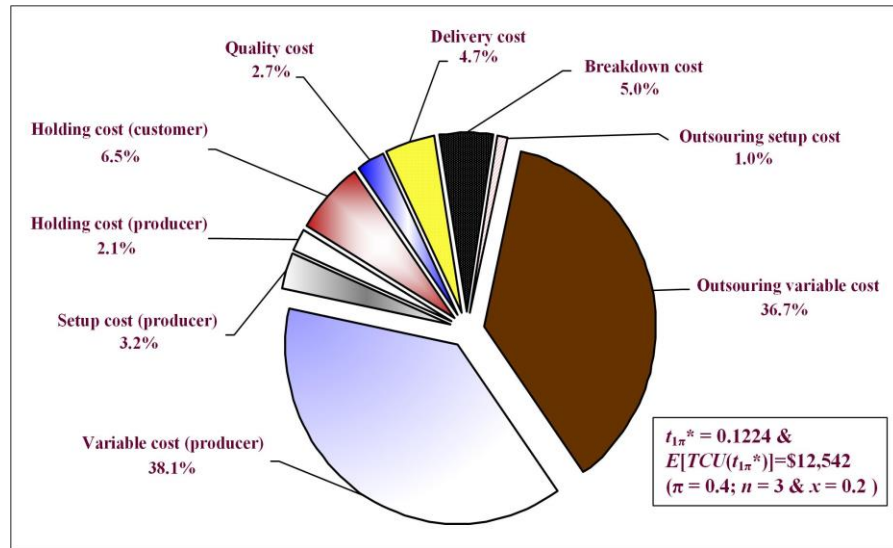
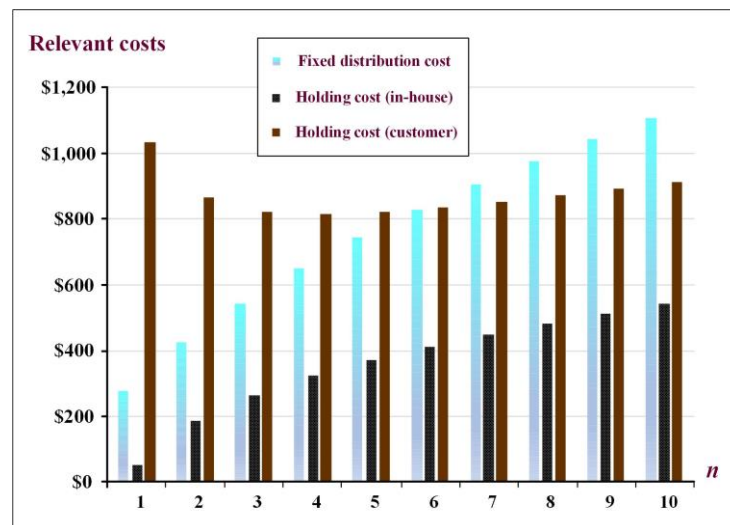
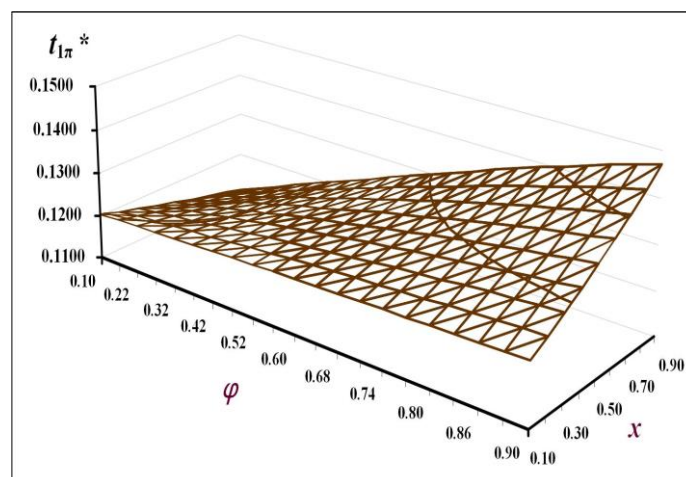
Figure 10. The effect of variations in outsourcing portion π on utilization.

The influence of changes in the number of deliveries n (per cycle) on the delivery and stock holding costs is illustrated in Figure 12. It reveals that as n increases, the fixed product distribution cost goes up significantly and in-house holding cost rises accordingly (the latter is simply due to a slow stock movement from the vendor to the buyer when n increases); on the contrary, the buyer holding cost drops accordingly.

4.2. The joint impact of the core system features on the problem

The joint impact of differences in uniformly distributed nonconforming rate x and total scrap rate ϕ on the optimal decision variable $t_{1\pi}^*$ is explored and illustrated in Fig. 13. It shows that $t_{1\pi}^*$ increases significantly as both x and ϕ rise.

The combined influence of variations in the outsourcing portion of a batch π and mean time to breakdown $1/\beta$ on the optimal decision variable $t_{1\pi}^*$ is studied and depicted in Fig. 14. It reveals that $t_{1\pi}^*$ decreases enormously as π increases, especially when $1/\beta$ value is less than 0.17; and as $1/\beta$ increases to over 0.17 and $\pi < 0.45$, $t_{1\pi}^*$ declines noticeably.


Figure 11. The breakup of $E[TCU(t_{1\pi}^*)]$.

Figure 12. The influence of changes in n on the delivery and stockholding costs.

Fig. 13. The joint impact of differences in x and ϕ on the optimal $t_{1\pi}^*$.

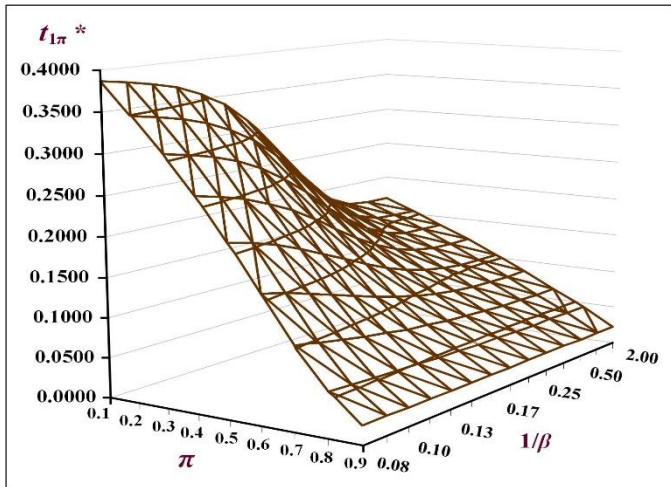


Figure 14. The combined influence of variations in π and $1/\beta$ on the optimal $t_{1\pi^*}$.

The joint effect of changes in the meantime to breakdown $1/\beta$ and total scrap rate φ on $E[TCU(t_{1\pi^*})]$ is demonstrated in Fig. 15. It shows $E[TCU(t_{1\pi^*})]$ decreases considerably as $1/\beta$ increases and as φ goes up, $E[TCU(t_{1\pi^*})]$ increases slightly. The effect of $1/\beta$ on $E[TCU(t_{1\pi^*})]$ is more significant than that from φ .

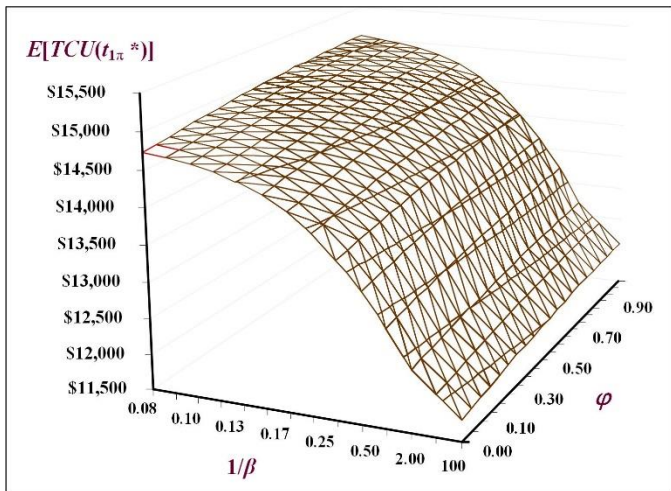


Figure 15. The joint effect of changes in $1/\beta$ and φ on $E[TCU(t_{1\pi^*})]$.

4.3. Discussion and limitation

This study develops the inventory replenishment model based on a case where only one or no breakdowns occur during a production cycle. Table C-1 (see Appendix C) presents the Poisson probabilities results for a machine with different mean breakdown rates per year. It specifies that for a machine in good condition, or with an average of less than one breakdown occurrence per year, this study is appropriate, as there is over 99.31% chance that only one or no breakdowns will occur (refer to Table C-1).

Besides, for a machine in fair condition, or with an average of less than or equal to two breakdown occurrences per year, our model indicates that there is over 97.27% chance of one or no breakdowns occurring (see Table C-1). However, to explore the fabrication planning for a piece of equipment having a mean breakdown rate greater than five per year, the suitability of our model will fall below 80%, therefore, a different model must be developed for this specific condition.

5. Conclusions

This study aims to assist multinational/transnational manufacturing firms with making the accurate decisions in their intra-supply chain environments, enable competitive strategies (including quality, low-cost, and timely delivery), and cope with the realities of limited capacity and unreliable equipment. Therefore, we examine a vendor-buyer coordinated system featuring batch fabrication, outsourcing, multiple deliveries, rework/disposal of defective items, and Poisson distributed breakdowns. Using the modeling, formulation, derivation, and optimization procedure along with a recursive algorithm, we in sequence obtain the problem's cost function, justify its convexity, and find the problem's optimal replenishment runtime. A numerical illustration is offered to show the applicability of the result that reveals various key system characteristics/capabilities, such as the distinct and joint influences of breakdowns (see Figs. 8, 11, 14, and 15), outsourcing (Figs. 10, 11, and 14), rework/scrap (Figs. 7, 11, 13, and 15), and delivery-frequency factors (Figs. 9, 11, and 12) on various system parameters, performance, and optimal runtime (Fig. 6). The methods proposed here and their results can facilitate managerial operations planning and strategic decision-making in an intra-supply chain setting in practice.

Appendix A

Detailed derivations for Eq. (32) are given below.

First, the integration results for the numerator and the denominator of Eq. (28) are shown in Eqs. (A-1) and (A-2), respectively.

$$\begin{aligned} & \left\{ \int_0^{t_{1\pi}} E[TC(t_{1\pi})_1] \cdot f(t) dt + \int_{t_{1\pi}}^{\infty} E[TC(t_{1\pi})_2] \cdot f(t) dt \right\} \\ &= K_{\pi} + K + nK_1 + t_{1\pi}\delta_1 + t_{1\pi}^2\delta_2 + M(1 - e^{-\beta t_{1\pi}}) + C_T\lambda g(1 - e^{-\beta t_{1\pi}}) + C_1\lambda g(1 - e^{-\beta t_{1\pi}}) \\ & \quad + h(P_1g) \left(-t_{1\pi}e^{-\beta t_{1\pi}} - \frac{1}{\beta}e^{-\beta t_{1\pi}} + \frac{1}{\beta} \right) + h_3\lambda g^2(1 - e^{-\beta t_{1\pi}}) + \frac{1}{2}h_2\lambda g^2(1 - e^{-\beta t_{1\pi}}) \\ & \quad + \frac{g}{2n}(h_2 - h)(t_{1\pi}P_1)(y_1 - y_2)(1 - e^{-\beta t_{1\pi}}) + \frac{hg}{2}(t_{1\pi}P_1)(y_1 - y_2)(1 - e^{-\beta t_{1\pi}}) \\ & \quad + \frac{g}{2}[h_2 + 2h_3](t_{1\pi}P_1)(y_1 + y_2)(1 - e^{-\beta t_{1\pi}}) \end{aligned} \quad (A-1)$$

where

$$\begin{aligned} \delta_1 &= C_{\pi}\pi \left[\frac{P_1}{(1-\pi)} \right] + CP_1 + C_Ty_1P_1 + C_RE[x]P_1(1 - \theta_1) + C_S\phi E[x]P_1 \\ \delta_2 &= \frac{E[x]^2P_1^2(1 - \theta_1)}{2P_2} [h_1(1 - \theta_1) - h] + \frac{P_1^2(h_2 - h)y_0}{2n\lambda(1 - \pi)}(y_1 - y_2) + \frac{h_2}{2} \frac{P_1^2}{(1 - \pi)} \left(\frac{y_0y_2}{\lambda} \right) \\ & \quad + \frac{h}{2\lambda} \frac{P_1^2}{(1 - \pi)} \left[\frac{y_0^2}{(1 - \pi)} + \frac{\lambda}{P_1} [E[x]\phi(1 - \pi) - \pi] + \frac{\lambda E[x](1 - \theta_1)(1 - 2\pi)}{P_2} \right] \\ E[T_{\pi}] &= \frac{t_{1\pi}P_1 \left[\frac{1}{(1 - \pi)} - E[x]\phi \right]}{\lambda} + g[1 - e^{-\beta t_{1\pi}}] \end{aligned} \quad (A-2)$$

With further derivation, one obtains $E[TCU(t_{1\pi})]$ as follows:

$$E[TCU(t_{1\pi})] = \left[\frac{\lambda}{y_1 + \frac{\lambda g[1 - e^{-\beta t_{1\pi}}]}{t_{1\pi}P_1}} \right] \left(\frac{W_0}{t_{1\pi}} + \frac{W_1}{t_{1\pi}} + W_2 + t_{1\pi}W_5 - hge^{-\beta t_{1\pi}} \right) \left(\frac{W_3e^{-\beta t_{1\pi}}}{t_{1\pi}} + W_4 - W_4e^{-\beta t_{1\pi}} \right) \quad (32)$$

where

$$\begin{aligned} W_0 &= \frac{K_{\pi}}{P_1} + \frac{K}{P_1} + \frac{nK_1}{P_1} \\ W_1 &= \left[\frac{M}{P_1} + \frac{C_T\lambda g}{P_1} + \frac{C_1\lambda g}{P_1} + \frac{h_3\lambda g^2}{P_1} + \frac{1}{2} \frac{h_2\lambda g^2}{P_1} + \frac{hg}{\beta} \right] \\ W_2 &= \left[C_{\pi}\pi \left[\frac{1}{(1 - \pi)} \right] + C + C_Ty_1 + C_RE[x](1 - \theta_1) + C_S\phi E[x] \right] \\ W_3 &= \left[-\frac{M}{P_1} - \frac{C_T\lambda g}{P_1} - \frac{C_1\lambda g}{P_1} - \frac{h_3\lambda g^2}{P_1} - \frac{1}{2} \frac{h_2\lambda g^2}{P_1} - \frac{hg}{\beta} \right] \\ W_4 &= \frac{hg}{2} \left[\frac{y_0}{(1 - \pi)} - \frac{\lambda}{P_1} - \frac{\lambda E[x](1 - \theta_1)}{P_2} \right] + \frac{g}{2n}(h_2 - h)(y_1 - y_2) + \frac{g}{2}(h_2 + 2h_3)(y_1 + y_2) \\ W_5 &= \frac{E[x]^2P_1(1 - \theta_1)}{2P_2} [h_1(1 - \theta_1) - h] + \frac{P_1y_1}{2n\lambda}(h_2 - h)(y_1 - y_2) + \left[\frac{h_2P_1y_0y_2}{2\lambda(1 - \pi)} \right] \\ & \quad + \frac{h}{2\lambda} \left[\frac{P_1}{(1 - \pi)} \right] \left[\frac{y_0^2}{(1 - \pi)} + \frac{\lambda}{P_1} [E[x]\phi(1 - \pi) - \pi] + \frac{E[x]\lambda(1 - \theta_1)}{P_2} [1 - 2\pi] \right] \end{aligned}$$

Appendix B

The first and second derivatives of $E[TCU(t_{1\pi})]$ are shown in equations (B-1) and (B-2) below:

$$\frac{dE[TCU(t_{1\pi})]}{d(t_{1\pi})} = \frac{\lambda}{[y_1 t_{1\pi} P_1 + \lambda g(1 - e^{-\beta t_{1\pi}})]^2} \left\{ \begin{aligned} &-(W_0 + W_1)P_1(y_1 P_1 + \lambda g \beta e^{-\beta t_{1\pi}}) \\ &+ W_3 P_1(-y_1 t_{1\pi} P_1 \beta e^{-\beta t_{1\pi}} - \lambda g \beta e^{-\beta t_{1\pi}} - y_1 P_1 e^{-\beta t_{1\pi}}) \\ &+ W_5 t_{1\pi} P_1(y_1 t_{1\pi} P_1 + 2\lambda g - 2\lambda g e^{-\beta t_{1\pi}} - t_{1\pi} \lambda g \beta e^{-\beta t_{1\pi}}) \\ &-(hg + W_4)P_1 \left(\begin{aligned} &-y_1 t_{1\pi}^2 P_1 \beta e^{-\beta t_{1\pi}} - \lambda g e^{-2\beta t_{1\pi}} \\ &-t_{1\pi} \lambda g \beta e^{-\beta t_{1\pi}} + \lambda g e^{-\beta t_{1\pi}} \end{aligned} \right) \\ &-(W_2 + W_4)P_1 \lambda g(t_{1\pi} \beta e^{-\beta t_{1\pi}} + e^{-\beta t_{1\pi}} - 1) \end{aligned} \right\} \quad (B-1)$$

and

$$\frac{d^2 E[TCU(t_{1\pi})]}{d(t_{1\pi})^2} = \frac{\lambda}{(y_1 t_{1\pi} P_1 + \lambda g(1 - e^{-\beta t_{1\pi}}))^3} \cdot \left\{ \begin{aligned} &(W_0 + W_1)P_1(2y_1^2 P_1^2 + y_1 t_{1\pi} P_1 \lambda g \beta^2 e^{-\beta t_{1\pi}} + 4y_1 P_1 \lambda g \beta e^{-\beta t_{1\pi}} + \lambda^2 g^2 \beta^2 e^{-2\beta t_{1\pi}} + \lambda^2 g^2 \beta^2 e^{-\beta t_{1\pi}}) \\ &+ W_3 P_1 e^{-\beta t_{1\pi}} \left(\begin{aligned} &y_1^2 t_{1\pi}^2 P_1^2 \beta^2 + 2y_1^2 P_1^2 + 2y_1^2 t_{1\pi} P_1 \beta + 2y_1 t_{1\pi} P_1 \lambda g \beta^2 + 2y_1 P_1 \lambda g \beta \end{aligned} \right) \\ &+ W_5 P_1 \lambda g \left(\begin{aligned} &y_1 t_{1\pi}^3 P_1 \beta^2 e^{-\beta t_{1\pi}} + 2\lambda g e^{-2\beta t_{1\pi}} + t_{1\pi}^2 \lambda g \beta^2 e^{-2\beta t_{1\pi}} - 4\lambda g e^{-\beta t_{1\pi}} \\ &+ 4t_{1\pi} \lambda g \beta e^{-2\beta t_{1\pi}} + t_{1\pi}^2 \lambda g \beta^2 e^{-\beta t_{1\pi}} - 4t_{1\pi} \lambda g \beta e^{-\beta t_{1\pi}} + 2\lambda g \end{aligned} \right) \\ &-(hg + W_4)P_1 e^{-2\beta t_{1\pi}} \left(\begin{aligned} &y_1^2 t_{1\pi}^3 P_1^2 \beta^2 e^{\beta t_{1\pi}} + 2y_1 t_{1\pi}^2 P_1 \lambda g \beta^2 e^{\beta t_{1\pi}} - 2y_1 t_{1\pi} P_1 \lambda g \beta e^{\beta t_{1\pi}} \\ &+ y_1 t_{1\pi}^2 P_1 \lambda g \beta^2 + 2\lambda^2 g^2 \beta + 4y_1 t_{1\pi} P_1 \lambda g \beta + t_{1\pi} \lambda^2 g^2 \beta^2 e^{\beta t_{1\pi}} \\ &+ 2y_1 P_1 \lambda g - 2y_1 P_1 \lambda g e^{\beta t_{1\pi}} - 2\lambda^2 g^2 \beta e^{\beta t_{1\pi}} + t_{1\pi} \lambda^2 g^2 \beta^2 \end{aligned} \right) \\ &+(W_2 + W_4)P_1 \lambda g \left(\begin{aligned} &t_{1\pi} \lambda g \beta^2 e^{-2\beta t_{1\pi}} + t_{1\pi} \lambda g \beta^2 e^{-\beta t_{1\pi}} + 2\lambda g \beta e^{-2\beta t_{1\pi}} - 2\lambda g \beta e^{-\beta t_{1\pi}} \\ &+ y_1 t_{1\pi}^2 P_1 \beta^2 e^{-\beta t_{1\pi}} + 2y_1 P_1 e^{-\beta t_{1\pi}} + 2y_1 t_{1\pi} P_1 \beta e^{-\beta t_{1\pi}} - 2y_1 P_1 \end{aligned} \right) \end{aligned} \right\} \quad (B-2)$$

Since the first term on the right-hand side (RHS) of Eq. (B-2) is positive, it follows that the $E[TCU(t_{1\pi})]$ is convex if the second term on the RHS of Eq. (B-2) is also positive. That means if the following $\gamma(t_{1\pi}) > t_{1\pi} > 0$ holds.

$$\gamma(t_{1\pi}) = \frac{\begin{aligned} &(W_0 + W_1)(2y_1^2 P_1^2 + 4y_1 P_1 \lambda g \beta e^{-\beta t_{1\pi}} + \lambda^2 g^2 \beta^2 e^{-2\beta t_{1\pi}} + \lambda^2 g^2 \beta^2 e^{-\beta t_{1\pi}}) \\ &+ W_3 e^{-\beta t_{1\pi}} \left(\begin{aligned} &2y_1^2 P_1^2 + 2y_1 P_1 \lambda g \beta + \lambda^2 g^2 \beta^2 \\ &+ 2y_1 P_1 \lambda g \beta e^{-\beta t_{1\pi}} + \lambda^2 g^2 \beta^2 e^{-\beta t_{1\pi}} \end{aligned} \right) + W_5 \lambda g(2\lambda g e^{-2\beta t_{1\pi}} - 4\lambda g e^{-\beta t_{1\pi}} + 2\lambda g) \\ &-(hg + W_4)e^{-2\beta t_{1\pi}}(2y_1 P_1 \lambda g - 2y_1 P_1 \lambda g e^{\beta t_{1\pi}} - 2\lambda^2 g^2 \beta e^{\beta t_{1\pi}} + 2\lambda^2 g^2 \beta) \\ &+(W_2 + W_4)\lambda g(2\lambda g \beta e^{-2\beta t_{1\pi}} - 2\lambda g \beta e^{-\beta t_{1\pi}} + 2y_1 P_1 e^{-\beta t_{1\pi}} - 2y_1 P_1) \end{aligned}}{\left\{ \begin{aligned} &(W_0 + W_1)(y_1 P_1 \lambda g \beta^2 e^{-\beta t_{1\pi}}) + W_3 e^{-\beta t_{1\pi}} y_1 (y_1 t_{1\pi} P_1^2 \beta^2 + 2y_1 P_1^2 \beta + 2P_1 \lambda g \beta^2 + P_1 \lambda g \beta^2 e^{-\beta t_{1\pi}}) \\ &+ W_5 \lambda g(y_1 t_{1\pi}^2 P_1 \beta^2 e^{-\beta t_{1\pi}} + t_{1\pi} \lambda g \beta^2 e^{-2\beta t_{1\pi}} + 4\lambda g \beta e^{-2\beta t_{1\pi}} + t_{1\pi} \lambda g \beta^2 e^{-\beta t_{1\pi}} - 4\lambda g \beta e^{-\beta t_{1\pi}}) \\ &-(hg + W_4)e^{-2\beta t_{1\pi}} \left[\begin{aligned} &y_1^2 t_{1\pi}^2 P_1^2 \beta^2 e^{\beta t_{1\pi}} + 4y_1 P_1 \lambda g \beta + y_1 t_{1\pi} P_1 \lambda g \beta^2 + \lambda^2 g^2 \beta^2 \\ &+ 2y_1 t_{1\pi} P_1 \lambda g \beta^2 e^{\beta t_{1\pi}} - 2y_1 P_1 \lambda g \beta e^{\beta t_{1\pi}} + \lambda^2 g^2 \beta^2 e^{\beta t_{1\pi}} \end{aligned} \right] \\ &+(W_2 + W_4)\lambda g(\lambda g \beta^2 e^{-2\beta t_{1\pi}} + \lambda g \beta^2 e^{-\beta t_{1\pi}} + y_1 t_{1\pi} P_1 \beta^2 e^{-\beta t_{1\pi}} + 2y_1 P_1 \beta e^{-\beta t_{1\pi}}) \end{aligned} \right\}} > t_{1\pi} \quad (B-3)$$

Appendix C

Table C-1: The probabilities of various Poisson distributed breakdown rates

β	$t_{1\pi}^*$	$P(x=0)$	$P(x=1)$	$P(x \leq 1)$	$P(x > 1)$
5.0	0.1644	43.95%	36.13%	80.09%	19.91%
4.0	0.1480	55.32%	32.75%	88.07%	11.93%
3.0	0.1356	66.59%	27.08%	93.67%	6.33%
2.0	0.1271	77.55%	19.71%	97.27%	2.73%
1.5	0.1243	82.99%	15.47%	98.46%	1.54%
1.0	0.1224	88.48%	10.83%	99.31%	0.69%
0.5	0.1214	94.11%	5.71%	99.82%	0.18%
0.01	0.1213	99.88%	0.12%	100.00%	0.00%

$$\frac{e^{-\beta t_{1\pi}^*} (\beta t_{1\pi}^*)^x}{x!} \quad (C-1)$$

Acknowledgments

This project is sponsored by the Ministry of Science and Technology of Taiwan (Funding number: MOST 107-2221-E-324-015).

References

- Arabi, M., Dehshiri, M.A., & Shokrgozar, M. (2018). Modeling transportation supply and demand forecasting using artificial intelligence parameters (Bayesian model). *Journal of Applied Engineering Science*, 16(1), 43-49.
<https://doi.org/10.5937/jaes16-12829>
- Al-Bahkali, E.A., & Abbas, A.T. (2018). Failure analysis of vise jaw holders for hacksaw machine. *Journal of King Saud University Engineering Sciences*, 30(1), 68-77.
<https://doi.org/10.1016/j.jksues.2015.12.007>
- Arun, P., Lincon, S.A., & Prabhakaran, N. (2019). An automated method for the analysis of bearing vibration based on spectrogram pattern matching. *Journal of Applied Research and Technology*, 17(2), 126-136.
<https://doi.org/10.22201/icat.16656423.2019.17.2.805>
- Bolaños, R.I., Escobar, J.W., & Echeverri, M.G. (2018). A metaheuristic algorithm for the multi-depot vehicle routing problem with heterogeneous fleet. *International Journal of Industrial Engineering Computations*, 9(4), 461-478.
<https://doi.org/10.5267/j.ijiec.2017.11.005>
- Chakraborty, T., Giri, B. C., & Chaudhuri, K. S. (2008). Production lot sizing with process deterioration and machine breakdown. *European Journal of Operational Research*, 185(2), 606-618.
<https://doi.org/10.1016/j.ejor.2007.01.011>
- Chiu, Y-S.P., Liu, C-J., & Hwang, M-H. (2017). Optimal batch size considering partial outsourcing plan and rework. *Jordan Journal of Mechanical and Industrial Engineering*, 11(3), 195-200.
- Chiu, Y-S.P., Chiu, V., Lin, H-D., & Chang, H-H. (2019a). Meeting multiproduct demand with a hybrid inventory replenishment system featuring quality reassurance. *Operations Research Perspectives*, 6.
<https://doi.org/10.1016/j.orp.2019.100112>
- Chiu, S.W., Wu, C-S., & Tseng, C-T. (2019b). Incorporating an expedited rate, rework, and a multi-shipment policy into a multi-item stock refilling system. *Operations Research Perspectives*, 6.
<https://doi.org/10.1016/j.orp.2019.100115>
- De Fontenay, C.C., & Gans, J.S. (2008). A bargaining perspective on strategic outsourcing and supply competition. *Strategic Management Journal*, 29(8), 819- 839.
<https://doi.org/10.1002/smj.697>
- Dohi, T., Okamura, H., & Osaki, S. (2001). Optimal control of preventive maintenance schedule and safety stocks in an unreliable manufacturing environment. *International Journal of Production Economics*, 74(1-3), 147-155.
[https://doi.org/10.1016/S0925-5273\(01\)00121-9](https://doi.org/10.1016/S0925-5273(01)00121-9)

- Farsijani, H., Nikabadi, M.S., & Ayough, A. (2012). A simulated annealing approach to optimize multi-products EPQ model with discrete delivery orders, imperfect production processes and service level constraint. *World Applied Sciences Journal*, 16(8), 1142-1157.
- Ghalme, S., Mankar, A., & Bhalerao, Y. (2017). Integrated Taguchi-simulated annealing (SA) approach for analyzing wear behaviour of silicon nitride. *Journal of Applied Research and Technology*, 15(6), 624-632.
<https://doi.org/10.1016/j.jart.2017.08.003>
- Goerler, A., & Voß, S. (2016). Dynamic lot-sizing with rework of defective items and minimum lot-size constraints. *International Journal of Production Research*, 54(8), 2284-2297.
<https://doi.org/10.1080/00207543.2015.1070970>
- Groenevelt, H., Pintelon, L., & Seidmann, A. (1992). Production batching with machine breakdowns and safety stocks. *Operations Research*, 40(5), 959-971.
<https://doi.org/10.1287/opre.40.5.959>
- Mohammadi, M. (2017). The tradeoff between outsourcing and using more factories in a distributed flow shop system. *Economic Computation and Economic Cybernetics Studies and Research*, 51(4), 279-295.
- Montarelo, L.A., Glardon, R., & Zufferey, N. (2017). A global simulation-optimisation approach for inventory management in a decentralised supply chain. *Supply Chain Forum: An International Journal*, 18(2), 112-119.
<https://doi.org/10.1080/16258312.2017.1305255>
- Morales, F., Franco, C., & Mendez-Giraldo, G. (2018). Dynamic inventory routing problem: Policies considering network disruptions. *International Journal of Industrial Engineering Computations*, 9(4), 523-534.
<https://doi.org/10.5267/j.ijiec.2017.11.001>
- Nielsen, I.E., & Saha, S. (2018). Procurement planning in a multi-period supply chain: An epiphany. *Operations Research Perspectives*, 5, 383-398.
<https://doi.org/10.1016/j.orp.2018.11.003>
- Paz, J.C., Granada-Echeverri, M., & Escobar, J.W. (2018). The multi-depot electric vehicle location routing problem with time windows. *International Journal of Industrial Engineering Computations*, 9(1), 123-136.
- Puška, A., Kozarević, S., Stević, Ž., & Stovrag, J. (2018). A new way of applying interval fuzzy logic in group decision making for supplier selection. *Economic Computation and Economic Cybernetics Studies and Research*, 52(2), 217-234.
<https://doi.org/10.24818/18423264/52.2.18.13>
- Richter, K. (1996). The EOQ repair and waste disposal model with variable setup numbers. *European Journal of Operational Research*, 95(2), 313-324.
[https://doi.org/10.1016/0377-2217\(95\)00276-6](https://doi.org/10.1016/0377-2217(95)00276-6)
- Rosar, F. (2017). Strategic outsourcing and optimal procurement. *International Journal of Industrial Organization*, 50, 91-130.
<https://doi.org/10.1016/j.ijindorg.2016.11.001>
- Saari, J., & Odelius, J. (2018). Detecting operation regimes using unsupervised clustering with infected group labelling to improve machine diagnostics and prognostics. *Operations Research Perspectives*, 5, 232-244.
<https://doi.org/10.1016/j.orp.2018.08.002>
- Sarker, B.R., Jamal, A.M.M., & Mondal, S. (2008). Optimal batch sizing in a multi-stage production system with rework consideration. *European Journal of Operational Research*, 184(3), 915-929.
<https://doi.org/10.1016/j.ejor.2006.12.005>
- Shakoor, M., Abu Jadayil, W., Jaber, N., & Jaber, S. (2017). Efficiency assessment in emergency department using lean thinking approach. *Jordan Journal of Mechanical and Industrial Engineering*, 11(2), 97-103.
- Skowronski, K., & Benton, W.C., Jr. (2018). The Influence of Intellectual Property Rights on Poaching in Manufacturing Outsourcing. *Production and Operations Management*, 27(3), 531-552.
<https://doi.org/10.1111/poms.12813>
- Souha, B., Soufien, G., & Mtibaa, A. (2018). Using system generator to design a hardware implementation of a fault-tolerant control of induction motor for electrical vehicle. *Journal of Engineering Research*, 6(2), 138-154.
- Stažnik, A., Babić, D., & Bajor, I. (2017). Identification and analysis of risks in transport chains. *Journal of Applied Engineering Science*, 15(1), 61-70.
<https://doi.org/10.5937/jaes15-12179>

Swenseth, R.S., & Godfrey, R.M. (2002). Incorporating transportation costs into inventory replenishment decisions. *International Journal of Production Economics*, 77(2), 113-130.
[https://doi.org/10.1016/S0925-5273\(01\)00230-4](https://doi.org/10.1016/S0925-5273(01)00230-4)

Thomas, D.J., & Griffin, P.M. (1996). Coordinated supply chain management. *European Journal of Operational Research*, 94, 1-15.
[https://doi.org/10.1016/0377-2217\(96\)00098-7](https://doi.org/10.1016/0377-2217(96)00098-7)

Vining, A., & Globberman, S. (1999). A conceptual framework for understanding the outsourcing decision. *European Management Journal*, 17(6), 645-654.
[https://doi.org/10.1016/S0263-2373\(99\)00055-9](https://doi.org/10.1016/S0263-2373(99)00055-9)

Vinod, B., & Solberg, J.J. (1984). Performance models for unreliable flexible manufacturing systems. *Omega*, 12(3), 299-308.
[https://doi.org/10.1016/0305-0483\(84\)90025-2](https://doi.org/10.1016/0305-0483(84)90025-2)

Vujosevic, M., Makajic-Nikolic, D., & Pavlovic, P. (2017). A new approach to determination of the most critical multi-state components in multi-state systems. *Journal of Applied Engineering Science*, 15(4), 401-405.
<https://doi.org/10.5937/jaes15-15936>

Zahraee, S.M., Rohani, J.M., & Wong, K.Y. (2018). Application of computer simulation experiment and response surface methodology for productivity improvement in a continuous production line: Case study. *Journal of King Saud University - Engineering Sciences*, 30(3), 207-217.
<https://doi.org/10.1016/j.jksues.2018.04.003>

Zhao, X., Qian, C., Nakamura, S., & Nakagawa, T. (2018). A summary of replacement policies with number of failures. *International Journal of Mathematical, Engineering and Management Sciences*, 3(2), 136-150.
<https://doi.org/10.33889/ijmems.2018.3.2-011>