



Journal of applied research and technology

ISSN: 1665-6423

Universidad Nacional Autónoma de México, Instituto de Ciencias Aplicadas y Tecnología

Abdullayev, Seidulla S.; Bakyt, Gabit B.; Aikumbekov, Muslim N.; Bondar, Ivan S.; Auyesbayev, Yerlan T.

Determination of natural modes of railway overpasses

Journal of applied research and technology, vol. 19, no. 1, 2021, pp. 1-10

Universidad Nacional Autónoma de México, Instituto de Ciencias Aplicadas y Tecnología

DOI: <https://doi.org/10.14482/INDES.30.1.303.661>

Available in: <https://www.redalyc.org/articulo.oa?id=47471683001>

- How to cite
- Complete issue
- More information about this article
- Journal's webpage in redalyc.org

UNAM redalyc.org

Scientific Information System Redalyc

Network of Scientific Journals from Latin America and the Caribbean, Spain and Portugal

Project academic non-profit, developed under the open access initiative



Determination of natural modes of railway overpasses

Seidulla S. Abdullayev* • Gabit B. Bakyt • Muslim N. Aikumbekov
Ivan S. Bondar • Yerlan T. Auyesbayev

*Kazakh Academy of Transport and Communications named after M. Tynyshpayev,
Almaty, Republic of Kazakhstan*

Received 05 07 2020; accepted 01 14 2021
Available online 02 28 2020

Abstract: Currently, there are many software systems and environments that allow you to simulate and perform fairly complex and voluminous calculations associated with dynamic effects on structural elements of overpasses. The aim of the article is to make an analysis of a reinforced concrete railway overpass as a whole and its elements separately. The article presents the calculated and experimental data of the forms and frequencies of natural vibrations of reinforced concrete railway overpasses under constant loads and the rolling stock off the span. As a result of the analysis of the tests, it was determined that the effect of the rolling stock passing through the reinforced concrete beam spans of 16.5 m and 23.6 m appears with frequency perturbations that are in the range $f = 4.41 \div 9.52$ Hz. These studies can be further used in the design of artificial structures, as well as to identify defects in structural elements of railway bridges.

Keywords: Beam spans, modal analysis, artificial structures, railway bridge, finite element model

*Corresponding author.

E-mail address: abdullayev4903@unesp.co.uk (Seidulla S. Abdullayeva).

Peer Review under the responsibility of Universidad Nacional Autónoma de México.

1. Introduction

Currently, there are many software systems and environments that allow you to simulate and perform fairly complex and voluminous calculations associated with dynamic effects on structural elements of overpasses. At present, in almost all software systems that perform calculations for strength, rigidity and stability, the finite element method (FEM) is implemented as the main tool for computer modeling (Alekseev et al., 2019; Gorga et al., 2018; Kromoser et al., 2020; Li et al., 2019). This method allows you to clearly understand the design of the structure, its movement and determine the forces in the structure under the influence of various loads or influences.

One of the advantages of the method is determined by the ability to increase the strength characteristics of the structure while optimizing the cost of materials and production. This is achieved through the use of spatial analysis technologies, taking into account the physical nonlinearity of materials, structural, geometric and genetic nonlinearity of the structure (Kasyanov et al., 2019; Skvortsov et al., 2018; Panchenko, 2018; Skvortsov et al., 2014). The guarantee of error-free modeling and, as a result, adequate calculation results is the professional training of the calculator, its practical experience, as well as the use of modern computer-aided design programs and BIM technology (Barabanshchikov et al., 2016; Makarenko & Kuznetsova, 2019; Pan et al., 2018; Umnova et al., 2018).

Depending on the tasks, in the work you can use such software systems: LUSAS (Great Britain); GTSTRUDL (USA); MIDAS/CIVIL (Korea); RM BRIDGE (Austria); SOFISTIK (Germany); LIRA (Ukraine); ANSYS, NAUSTAN, SCAD, KATRAN, Tekla (Russia) and many other complexes that allow you to build finite-element computational models of artificial structures with minimal labor and time, for design engineers (Babaytsev et al., 2017; Babaytsev et al., 2019; Cabana et al., 2018; Gendler & Savenkov, 2017).

The advantage of using finite element models is the ability to simulate various malfunctions in the design, adapting the calculation results to actual operating conditions. By the deviation of the calculated values of the amplitude-phase-frequency characteristics (APFC) from the normative, one can judge the degree of damage to the span structures of the railway bridge. In the Tekla PC developed by I.V. Nesterov there are certain developments in this direction, when creating a calculation model, an extensive library of structural units is used, which allows you to elaborate and analyze the exploitable designs of railway bridges in detail (Smirnova & Aung, 2017; Yazdani & Azimi, 2020).

2. Materials and methods

The article considers the results of a modal analysis of a reinforced concrete railway overpass as a whole and its elements separately. The design scheme of the overpass 16.50 + 23.60 + 16.50 m (Fig. 1).

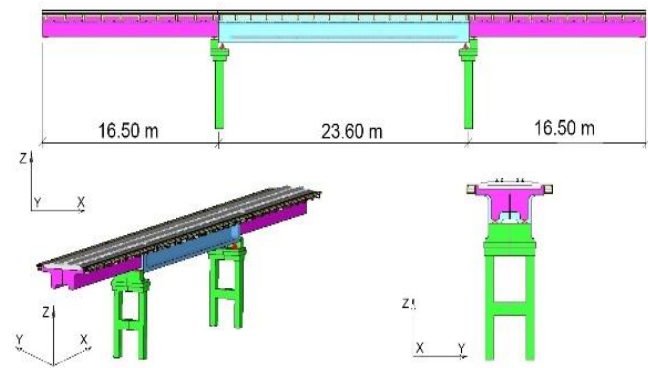


Figure 1. The finite element model of the overpass, general view.

Let's get the data for the calculation. We will consider the following design case – “Tension reinforcement blocks 23.6 m + dead weight”. The forms and frequencies of natural vibrations of the structure were calculated under preliminary loading with constant loads – “Tension of the reinforcement of the blocks 23.6 m + Net weight”, using the experience of contemporaries (Groshev, 1999; Kataev, 1984; Rupasova & Kondratov, 2012; Shaposhnikov et al., 1986; Verma & Nallasivam, 2020). The results of the calculation model of the overpass (FEM) are presented in Figures 2-6 (modal analysis).

Mode 1. The first transverse bending mode of vibration is a bending form with one “antinode” in the plane of the path (transverse bending). Accent is the portion of a standing wave in which the oscillations have the greatest amplitude. I consider it to be the first bend in the plane of the path (i.e., not in the vertical plane), the frequency is 4.56 Hz (Fig. 2).

Mode 2. The first vertical bending form is a bending form for a 23.6 m span with one “antinode” in the vertical plane. I consider it the first to bend in the vertical plane (i.e., not in the plane of the path), the frequency is 6.00 Hz (Fig. 3).

Mode 3. The second transverse bending mode of vibration is a bending form with two “antinodes” in the plane of the path. It is similar to “Mode 1”, so the second transverse bending in the plane of the path, the frequency of 7.67 Hz (Fig. 4).

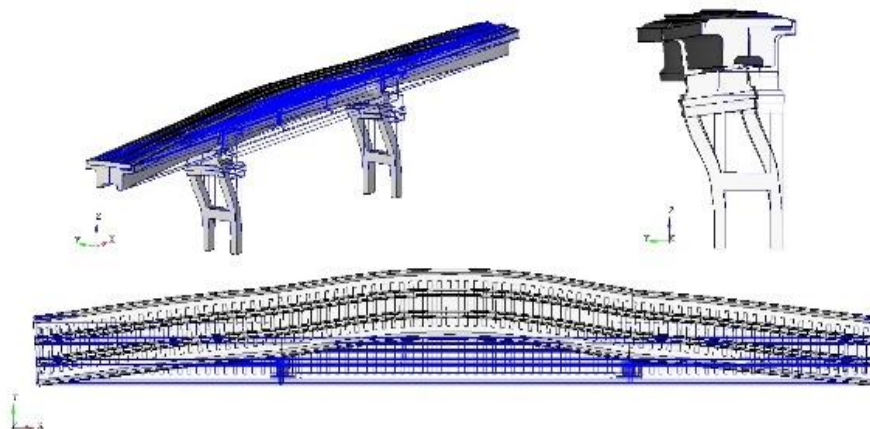


Figure 2. Modal analysis: 1st. mode of natural oscillations (frequency 4.56 Hz).

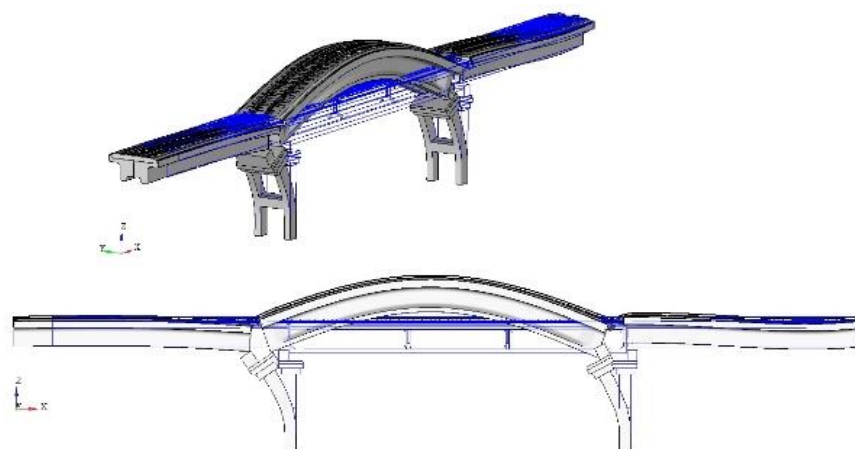


Figure 3. Modal analysis: 2nd. mode of natural oscillations (frequency 6.00 Hz).

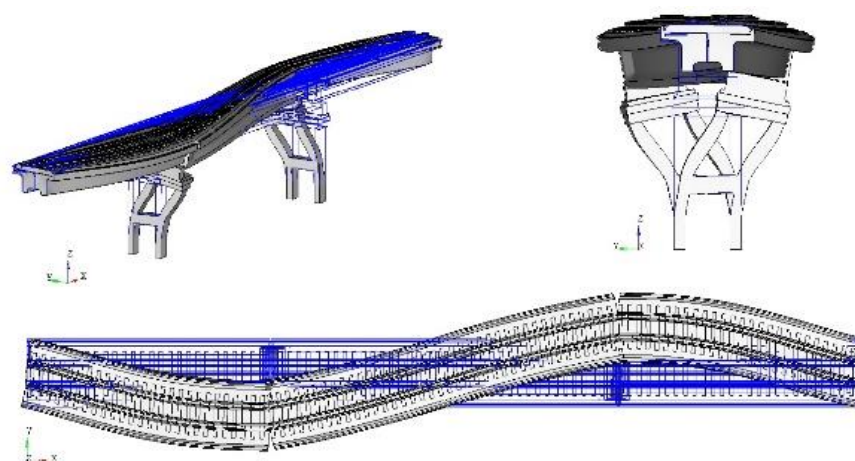


Figure 4. Modal analysis: 3rd. mode of natural oscillations (frequency 7.67 Hz).

Mode 4. The second vertical bending form is very similar in appearance to “Mode 1”. Noticeable differences are, perhaps, only in the direction of inclination of the support frames with the same form of bending of the span 23.6 m, “antinode” up, frequency 7.92 Hz (Fig. 5).

Mode 5. Complex vibrational mode (torsional) a 23.6 m span is twisted around a certain longitudinal axis, while in the top view one “antinode” is distinguishable from bending in the plane of the path, the frequency is 9.15 Hz (Fig. 6).

Thus, the oscillation frequencies detected by the calculation do not fall into the forbidden set of rules (Set of rules No. 35.13330, 2011) in the interval of less than 0.67 Hz.

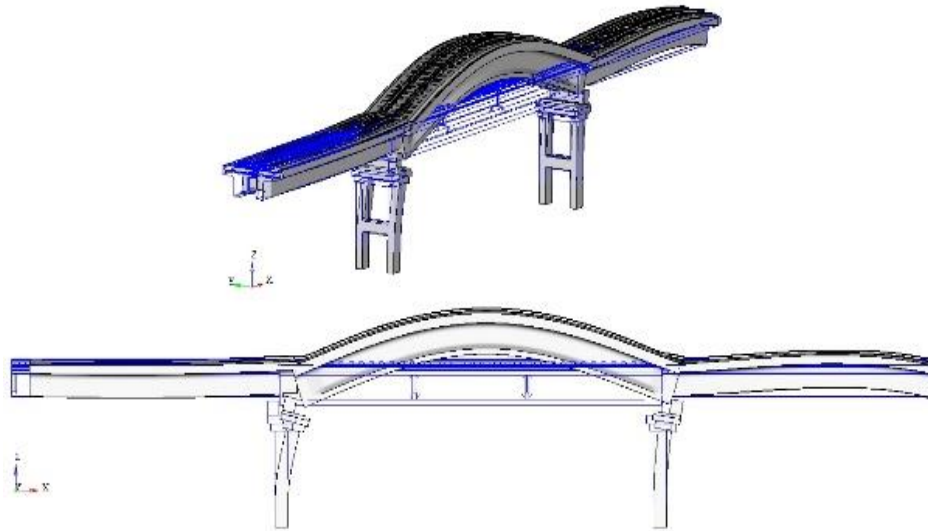


Figure 5. Modal analysis: 4th. mode of natural oscillations (frequency 7.92 Hz).

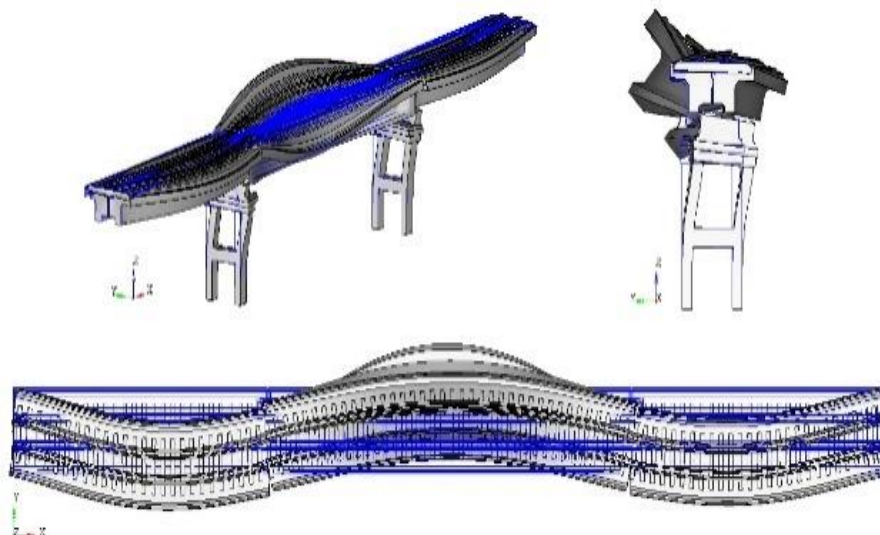


Figure 6. Modal analysis: 5th. mode of natural oscillations (frequency 9.15 Hz).

3. Results and discussion

Experimental and theoretical data were obtained on beam reinforced concrete spans by the following authors (Agrati, 1994; Aktan et al., 1994; Aktan, 1995; Bondar et al., 2016; COSMOS/M User Manual Version 1.75, 1996; Kvashnin et al., 2015a; Kvashnin et al., 2015b). The data obtained in the calculations of the beam spans of the railway overpass according to the forms (modes) and frequencies of natural vibrations are summarized in Table 1.

Table 1. Forms and frequencies of natural vibrations of building blocks.

Overpass by design scheme 16.50 + 23.60 + 16.50 m					
Mode (Form)	1 st .	2 nd .	3 rd .	4 th .	5 th .
Frequency Hz	4.56	6.00	7.67	7.92	9.15

Below are some results of full-scale tests of a single-track railway overpass over the highway in the production zone constructed according to the schemes: 16.5 + 23.6 + 16.5 m per km 56 PK9 + 50 of the Kulsary-Tengiz railway line from prefabricated reinforced concrete structures in 1988. The abutments and intermediate supports are frame, two-rack, reinforced concrete. The abutments of the bulk type, the reinforcement of the cones of abutments are made of concrete slabs with dimensions of 50 × 50 × 10 cm.

The supporting parts are sector ones consisting of an upper balancer, a hinge, a lower balancer in the form of a sector, a steel plate and a tooth, by which possible displacement of the sector is prevented. The number of supporting parts per span is 4 pieces (two movable and two fixed). On the support No. 1 are movable, and on the support No. 2 are stationary sector supporting parts.

Bridge canvas with gravel ballast riding, R-65 rails, wooden sleepers, Pandrol fastening, sleepers plot 1840 pcs/km. The link path, the rails have a length of 25 m, the joints of the rails are arranged along a square. On the overpass stacked counter rails made of R-50 rails with a crutch. At a distance of 10 m from the rear edges of the abutments, the counter rails are shuttled, the ends of the rails are fastened with two bolts, the shoes are typical metal. The spans have separate side walkways on metal consoles attached to the sides of the spans on both sides. Paving flooring made of reinforced concrete slabs. Racks and handrails of the railings are made of corners with a section of 65 × 65 × 6 mm, railings are made of two bars of reinforcement with a diameter of 20 mm.

Figure 7 shows the longitudinal sections of the spans with the installation locations on the viaduct structural elements of the three-component geophones with the “EP-300 kompakt” liquid damper, which allow recording vibrations in three planes (vertical – Z, horizontal transverse – Y, horizontal longitudinal – N). Monitoring was carried out in the daytime in the spring using the automated measuring complex DYNAMICS (AIK DYNAMICS) (Technical report. Inspection..., 2018).

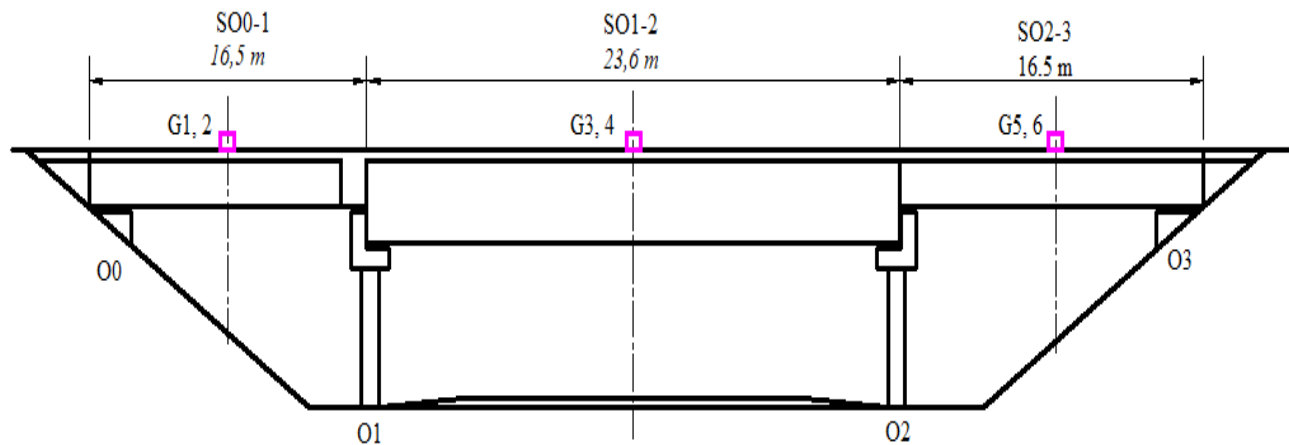


Figure 7. The arrangement of geophones on reinforced concrete spans of a railway overpass: SO0-1, SO1-2, SO2-3 – spans of an overpass.

G1, G2, G3, G4, G5, G6 geophones “EP-300 kompakt”; O1, O2 – frame, two-rack intermediate supports; O0, O3 – abutments of bulk type.

Tests of this overpass were carried out on April 18, 2018 in the daytime, at an outside temperature of +18°C. As an example, graphs of the spectral density of reinforced concrete spans 16.5 m (Figs. 8-9), and 23.6 m (Figs. 10-11) are presented when the “locomotive + wagon” coupler descends from the overpass passing at a speed of 50 km/h.

The data obtained during the testing of beam spans of a railway overpass after a mobile load has collapsed (“locomotive + wagon” coupler), shape (mode) and natural vibration frequency are summarized in Table 2.

As a result of the analysis of the tests, it was determined that the effect of the rolling stock passing through the reinforced

concrete beam spans of 16.5 m and 23.6 m appears with frequency perturbations that are in the range $f = 4.41 \div 9.52$ Hz.

These disturbances primarily determine the reaction of spans. Perturbations whose frequencies do not fall into these regions, as follows from the analysis of the spectra, do not play a special role in shaping the behavior of spans, since their amplitudes are very small and the energy, they introduce into the system is negligible. An analysis of the experimental data characterizing the operation of the overpass made it possible to establish the parameters of free vibrations of unloaded spans.

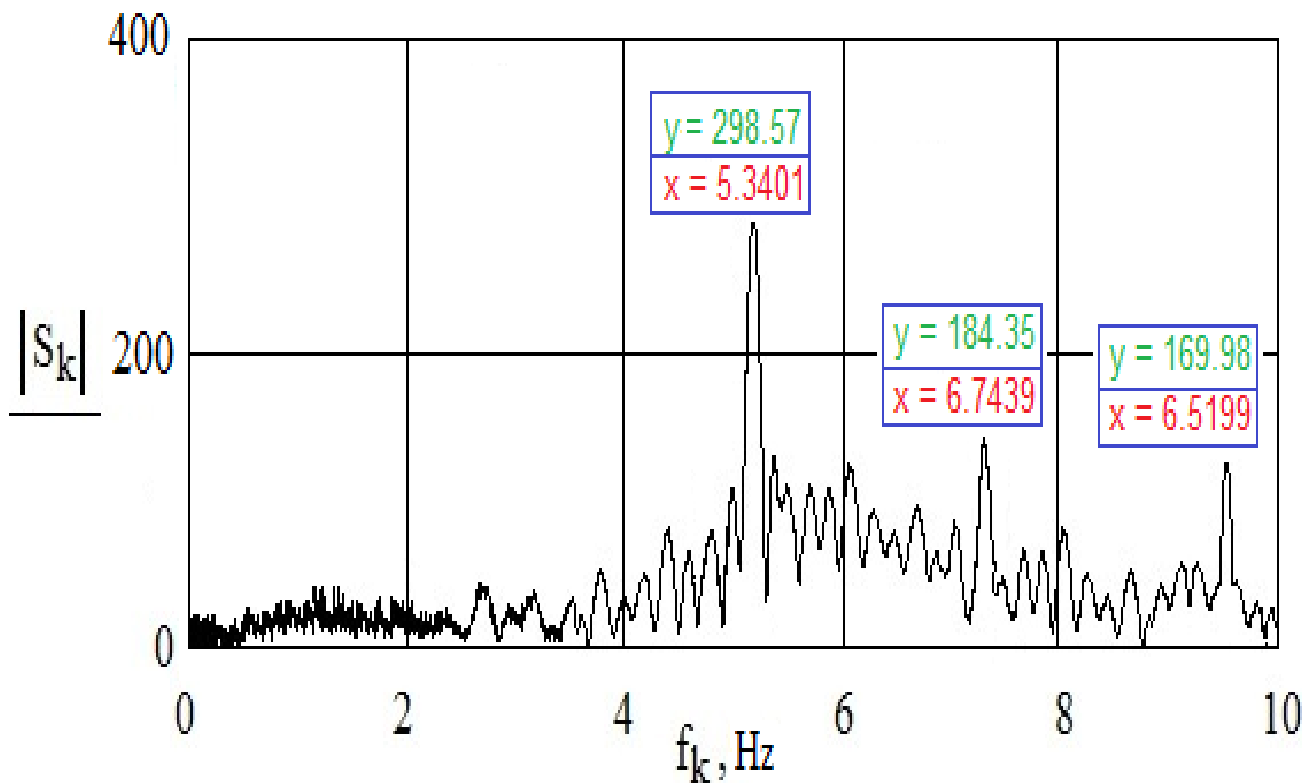


Figure 8. The range of horizontal movements of the middle section of a reinforced concrete beam 16.5 m (transverse bending modes of vibration).

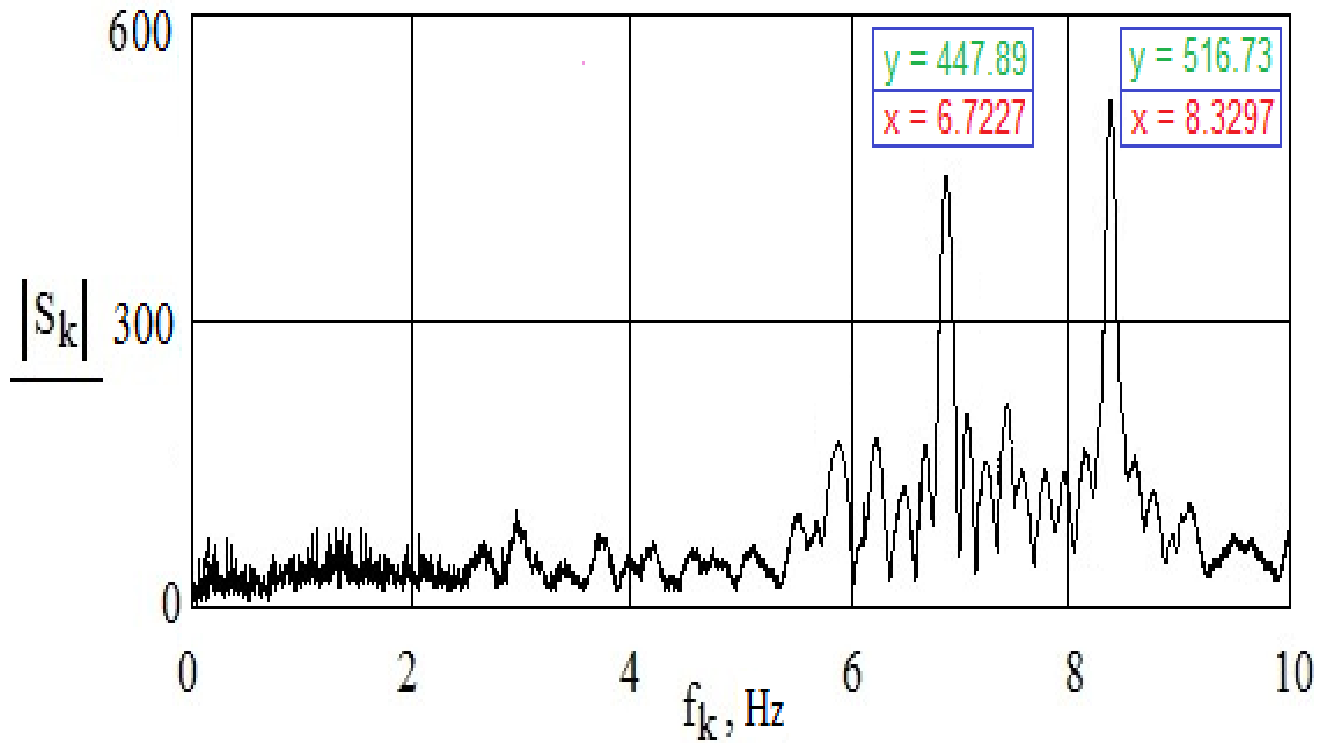


Figure 9. The range of vertical displacements of the middle of a reinforced concrete beam 16.5 m (vertical bending modes of vibration).

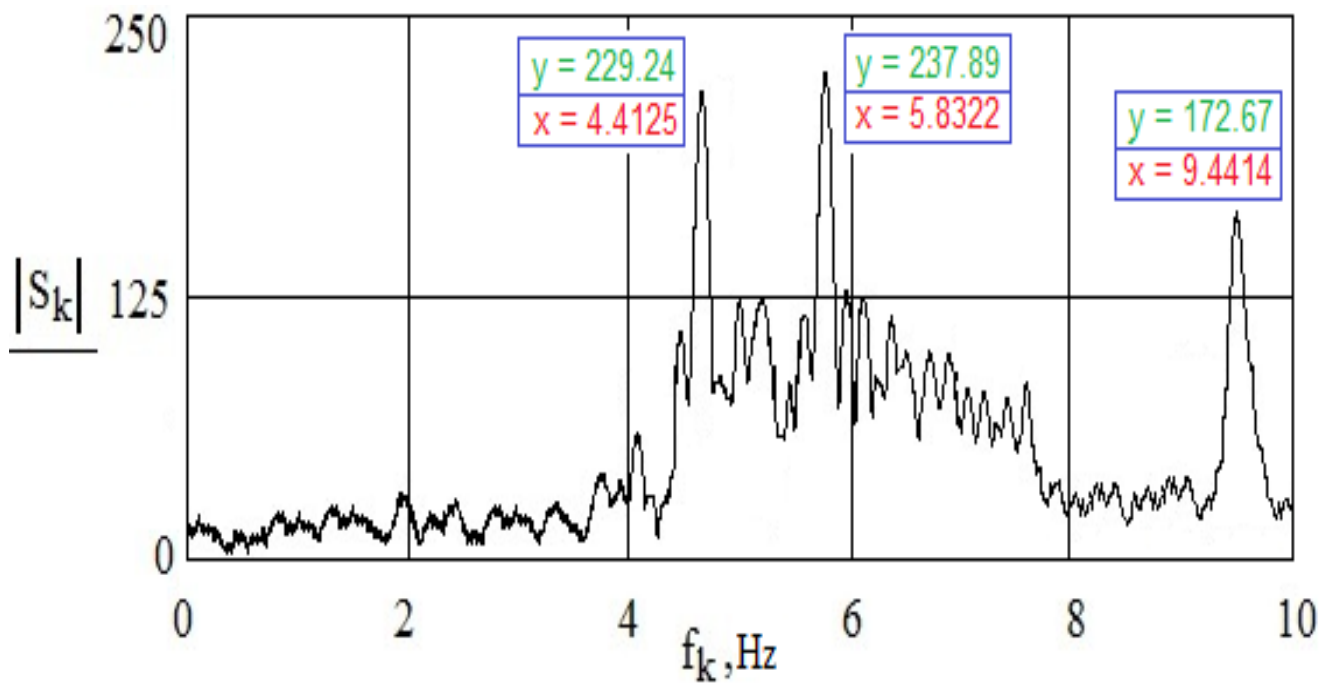


Figure 10. The range of horizontal movements of the middle section of a reinforced concrete beam 23.6 m (transverse bending modes of vibration).

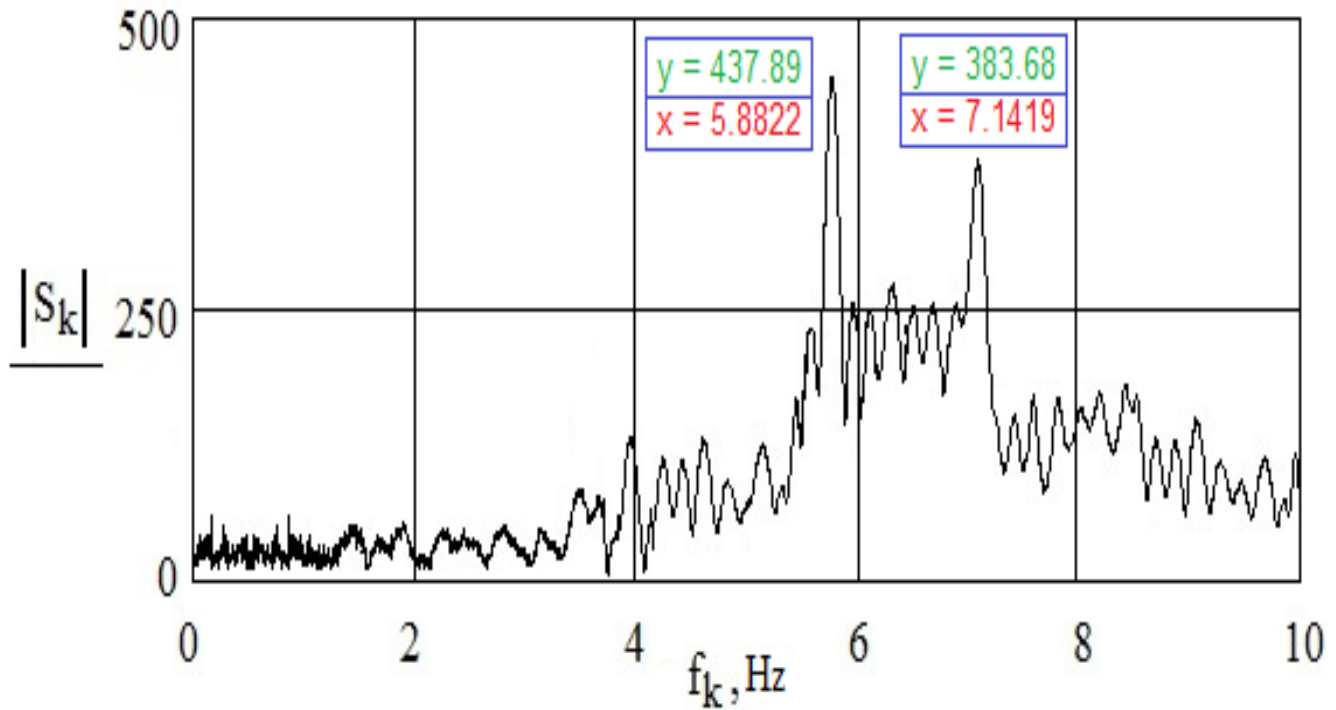


Figure 11. The range of vertical displacements of the middle section of a reinforced concrete beam 23.6 m (vertical bending modes of vibration).

Table 2. Frequencies of natural vibrations of overpass spans.

Overpass at km 56 PK9 + 50 of the Kulsary-Tengiz railway line			
Mode (Form)	1 st .	2 nd .	3 rd .
Span: reinforced concrete beam 23.6 m			
Transverse frequency, Hz	4.41	5.83	9.44
Vertical frequency, Hz	5.88	7.14	–
Span: reinforced concrete beam 16.5 m			
Transverse frequency, Hz	5.34	6.74	9.52
Vertical frequency, Hz	6.72	8.33	–

4. Conclusions

From the analysis of the calculated and experimental values of the vibrations of the beam reinforced concrete spans of the overpass using the fast Fourier transform as a signal processing tool, it follows that to determine the period of the natural vibrations of the span for comparison with the normalized range, you can apply the effect on the structure that has come down to a moving load.

The obtained forms (modes) of frequencies (periods) of natural vibrations correspond to the lowest vibration form of spans, the values of which can be used in calculations of such artificial structures for earthquake resistance, as well as in dynamic stability calculations for prospective loads. In order to determine the actual technical state of structures and the most effective assessment of the reliability of bridge structures and establish correspondence between the design scheme and the actual operation of structures on the trunk lines of Russia and Kazakhstan, it is necessary to periodically monitor the stress-strain state of structures under operational loads.

References

- Agrati, S. (2015). *Estimation of structural parameters from ambient vibration test* (Doctoral dissertation, Master thesis, Danish Technical University).
- Aktan, A. E. (1995). *Issues in instrumented bridge health monitoring. In Materials of the IABSE Symposium. IABSE.*
- Aktan, A. E., Lee, K. L., Chuntavan, C., & Aksel, T. (1994, January). *Modal testing for structural identification and condition assessment of constructed facilities. In Proceedings of the International Society for Optical Engineering* (pp. 462-462).
- Alekseev, A.N., Alekseev, S.A., Zabashta, Y.F., Hnatiuk, K.I., Dinzhos, R.V., Lazarenko, M.M., Grabovskii, Y.E., & Bulavin, L.A. (2019). Two-dimensional ordered crystal structure formed by chain molecules in the pores of solid matrix. *Springer Proceedings in Physics*, 221, 387-395.
https://doi.org/10.1007/978-3-030-17759-1_26
- Babaytsev, A., Dobryanskiy, V., & Solyaev, Y. (2019). Optimization of thermal protection panels subjected to intense heating and mechanical loading. *Lobachevskii Journal of Mathematics*, 40(7), 887-895.
<https://doi.org/10.1134/s1995080219070059>
- Babaytsev, A.V., Martirosov, M.I., Rabinskiy, L.N., & Solyaev, Y.O. (2017). Effect of thin polymer coatings on the mechanical properties of steel plates. *Russian Metallurgy (Metally)*, 13, 1170-1175.
<https://doi.org/10.1134/s003602951713002x>
- Barabanshchikov, Y., Belkina, T., Muratova, A., & Bieliatynskiy, A. (2016). Heat liberation of barium cements as a background of their application in mass concrete structures. *Solid State Phenomena*, 871, 9-15.
<https://doi.org/10.4028/www.scientific.net/msf.871.9>
- Bondar, I.S., Burombaev, S.A., & Kvashnin M.Ya. (2016). *Dynamic track operation under heavy-weight locomotives. Way and Track Facilities*, 1, 29-32.
- Cabana, E., Falshtynskiy, V., Saik, P., Lozynskiy, V., & Dychkovskiy, R. (2018). A concept to use energy of air flows of technogenic area of mining enterprises. *E3S Web of Conferences*, 60.
<https://doi.org/10.1051/e3sconf/20186000004>
- COSMOS/M User Manual (Version 1.75). (1996).
- Gendler, S.G., & Savenkov, E.A. (2017). Thermophysical justification of new ventilation patterns for double-track subway tunnels in cold climate. *17th International Symposium on Aerodynamics, Ventilation and Fire in Tunnels 2017, ISAVFT 2017* (pp. 427-439). ISAVFT.
- Gorga, R.V., Sanchez, L.F.M., & Martín-Pérez, B. (2018). FE approach to perform the condition assessment of a concrete overpass damaged by ASR after 50 years in service. *Engineering Structures*, 177, 133-146.
<https://doi.org/10.1016/j.engstruct.2018.09.043>
- Groshev, D.G. (1999). *Application of the finite element method to study the vibrations of load-bearing structures under the action of moving loads. Moscow State University of Railway Engineering.*
- Kasyanov, A.V., Belousov, A. E., Popov, G.G., & Bolobov V.I. (2019). Determination of factors affecting on grooving corrosion. *Topical Issues of Rational Use of Natural Resources* (pp. 393-399).
<https://doi.org/10.1201/9781003014577-49>
- Kataev, S.K. (1984). *Application of the finite element method in the calculation of structures for a moving load. Moscow State University of Railway Engineering.*
- Kromoser, B., Ritt, M., Spitzer, A., Stangl, R., & Idam, F. (2020). Design concept for a greened timber truss bridge in city area. *Sustainability*, 12(8), 3218.
<https://doi.org/10.3390/su12083218>
- Kvashnin, M. Y., Bondar, I. S., & Zhangabylova, A. M. (2015a). *Monitoring the effects of rolling stock on beam spans of railway bridges (Monitoring vozdeistviya podvizhnogo sostava na balochnie prolethnie stroeniya zheleznodorozhnykh mostov). In Proceedings of International scientific and practical conference «Transport Science and Innovations», dedicated to the message of the President of the Republic of Kazakhstan NA Nazarbayev «Nurly Zhol—the path to the future* (pp. 275-279).
- Kvashnin, M.Y., Burombaev, S.A., Bondar, I.S., & Zhangabylova, A.M. (2015b). The influence of the vibrodynamic effects of locomotives with high axial loads on the railway track and beam reinforced concrete bridge spans. In *Materials of the International Scientific and Technical Conference “Modern Problems of Design, Construction and Operation of the Railway”. Readings Dedicated to the Memory of Professor G.M. Shakhunyants* (pp. 163-166). MGUPS (MIIT).

- Li, Z., Li, D., Lu, Y., Cheng, K., & Wu, Q. (2019). Serviceability analysis of a cable-supported footbridge subjected to human-induced loads. *International Journal of Structural Integrity*, 11(3), 497-513.
<https://doi.org/10.1108/ijsi-09-2019-0092>
- Makarenko, A.V., & Kuznetsova, E.L. (2019). Energy-efficient actuator for the control system of promising vehicles. *Russian Engineering Research*, 39(9), 776-779.
<https://doi.org/10.3103/s1068798x19090144>
- Pan, J., Fang, H., Xu, M. C., & Wu, Y. F. (2018). Study on the performance of energy absorption structure of bridge piers against vehicle collision. *Thin-Walled Structures*, 130, 85-100.
<https://doi.org/10.1016/j.tws.2018.05.008>
- Panchenko, N.G. (2018). The theoretical concept of quality management of railway transport services on the principles of social responsibility. *Scientific Bulletin of Mukachevo State University. Series "Economy"*, 2(10), 35-41.
- Rupasova, I.V., & Kondratov, V.V. (2012). Loads taken in the design of railway bridges. *Proceedings of St. Petersburg University of Railways*, 4, 117-124.
- Set of rules No. 35.13330. *Bridges and culverts*. (2011).
- Shaposhnikov, H.H., Kashaev, S.K., Babaev, V.B., & Dolganov, A.A. (1986). Structural analysis of the action of a moving load using the finite element method. *Structural Mechanics and Structural Analysis*, 1, 50-54.
- Skvortsov, A.A., Gnatyuk, E.O., Luk'Yanov, M.N., & Khripach, N.A. (2018). Features of cracking of samples from titanium and iron-chromium-nickel alloys. *Periodico Tche Quimica*, 15(1), 166-173.
- Skvortsov, A.A., Kalenkov, S.G., & Koryachko, M.V. (2014). Phase transformations in metallization systems under conditions of nonstationary thermal action. *Technical Physics Letters*, 40(9), 787-790.
<https://doi.org/10.1134/s1063785014090302>
- Smirnova, O.V., & Aung, Ch. Z. (2017). The use of information modeling in the design of bridges. In *Materials of the XV International Scientific and Technical Conference (Readings Dedicated to the Memory of Professor G.M. Shakhunyants)*. Russian University of Transport.
- Technical report. *Inspection and testing of the railway overpass according to the scheme 16.5 + 23.6 + 16.5 m through the II category highway at km 56 PK9 + 50 of the Kulsary-Tengiz railway line*. (2018).
- Umnova, E.V., Ylesin, M.A., Mashin, N.A., & Karmanovskaya, N.V. (2018). High-strength concrete made of nonferrous-metals industry waste. *Key Engineering Materials*, 771, 37-42.
- Verma, V., & Nallasivam, K. (2020). One-dimensional finite element analysis of thin-walled box-girder bridge. *Innovative Infrastructure Solutions*, 5(2), article number 51.
<https://doi.org/10.1007/s41062-020-00287-x>
- Yazdani, M., & Azimi, P. (2020). Assessment of railway plain concrete arch bridges subjected to high-speed trains. *Structures*, 27, 174-193.
<https://doi.org/10.1016/j.istruc.2020.05.042>