



DYNA

ISSN: 0012-7353

Universidad Nacional de Colombia

Hernández, Diana Margarita; Hurtado, Lucia Andrea
del Pilar; Rodríguez-Chaparro, Adela Tatiana
Hydrogen production in a novel configuration of UASB reactor under different hydraulic retention time
DYNA, vol. 85, no. 205, 2018, April-June, pp. 157-162
Universidad Nacional de Colombia

DOI: <https://doi.org/10.15446/dyna.v85n205.70494>

Available in: <https://www.redalyc.org/articulo.oa?id=49657889020>

- How to cite
- Complete issue
- More information about this article
- Journal's webpage in redalyc.org

UNEN 

Scientific Information System Redalyc
Network of Scientific Journals from Latin America and the Caribbean, Spain and
Portugal

Project academic non-profit, developed under the open access initiative

Hydrogen production in a novel configuration of UASB reactor under different hydraulic retention time

Diana Margarita Hernández, Lucia Andrea del Pilar Hurtado & Adela Tatiana Rodríguez-Chaparro

*Laboratorio de Saneamiento Ambiental, Programa de Ingeniería Civil, Universidad Militar Nueva Granada, Bogotá, Colombia.
u1100846@unimilitar.edu.co, andrehuriz@gmail.com, adela.rodriguez@unimilitar.edu.co*

Received: February 16th, 2018. Received in revised form: April 3rd, 2018. Accepted: April 26th, 2018.

Abstract

The aim of this work was to evaluate the production of hydrogen in a conventional and hybrid Upflow Anaerobic Sludge Blanket (UASB) reactors by modifying the hydraulic retention time (HRT). Both reactors operated continuously close to 135 days, with organic loading rate (OLR) of 11.26 kgCOD.m⁻³.d⁻¹ at 12, 8 and 4 h. In the hybrid reactor, Biopack® rings with polyurethane foam at its center were used. The results showed that the UASB hybrid reactor achieved a stable and continuous production of over 60% of hydrogen gas at each HRT, related to carbon dioxide reduction until the end of the operation. The ANOVA and TUKEY tests, with a 95% reliability level, showed that there was a significant difference between the HRT evaluated, observing that the highest hydrogen production was obtained with 4 h of HRT. In the conventional UASB reactor, there was no stability during the operation time.

Keywords: Biopack® rings; total volatile acids; UASB reactors

Producción de hidrogeno utilizando una nueva configuración de reactor anaerobio UASB bajo diferentes tiempos de retención hidráulica

Resumen

El objetivo de este estudio fue evaluar la producción de hidrógeno en un reactor anaerobio de manto de lodos y flujo ascendente (UASB) convencional y otro híbrido, modificando el tiempo de retención hidráulica (TRH). Los dos reactores operaron cerca de 135 días continuamente, con una carga orgánica volumétrica de 11.26 kgDQO.m⁻³.d⁻¹ y valores TRH de 12, 8 y 4 h. En el reactor híbrido se utilizaron anillos de marca Biopack, adicionando espuma de poliuretano en su centro. Los resultados mostraron que la producción de hidrógeno en el reactor UASB híbrido fue estable y superior al 60% en cada uno de los TRH, relacionada con la reducción de dióxido de carbono hasta el final de la operación. Las pruebas de ANOVA y TUKEY mostraron que existen diferencias significativas entre los TRH evaluados, con un nivel de confiabilidad del 95%, observando que la mayor producción de hidrógeno fue obtenida con un TRH de 4 h. En el reactor UASB convencional no se detectó estabilidad en la producción de hidrógeno durante el tiempo de operación.


Palabras clave: anillos de Biopack; ácidos totales volátiles; reactor UASB.

1. Introduction

Depending on fossil fuels as our main energy source will cause in the mid-term an energy crisis and several environmental contamination problems. Hydrogen gas is one of the most promising alternatives to fossil fuels. The H₂ gas is considered renewable, clean, and produces only water during its combustion.

Among the different ways to produce hydrogen, biological production seems to be the most attractive alternative due to different products can be used as raw material, most of which are cost efficient and easy to find. Moreover, if the process is optimized, we can obtain byproducts with added value, for instance, organic acids and biopolymers [1]. Nevertheless, on the hydrogen production through dark fermentation, there are several

How to cite: Hernández, D.M., Hurtado, L.A.del P. and Rodríguez-Chaparro, A.T., Hydrogen production in a novel configuration of UASB reactor under different hydraulic retention time. DYNA, 85(205), pp. 157-162, June, 2018.

© The author; licensee Universidad Nacional de Colombia. 
Revista DYNA, 85(205), pp. 157-162, June, 2018, ISSN 0012-7353
DOI: <https://doi.org/10.15446/dyna.v85n205.70494>

factors that influence and limit the process, among which there are: pH value, temperature, C/N relation, carbon source, S/X relation, configuration of the reactor, fermentation route, the dominant microbial community, etc. [2,3].

The UASB reactor is the most widely used reactor in the world for treating domestic and industrial wastewaters. Ever since its creation by Gatzke Lettinga in the 1980s, it has been an economically viable technology, easily used with promising results. The feasibility of UASB reactors for the production of hydrogen was initially studied by [4], who found values of $0.16 \text{ L} \cdot \text{L}^{-1} \cdot \text{h}^{-1}$ of Hydrogen Production Rate (HPR) operating at 2 h of HRT without presence of methane in the biogas, using an inoculum of mixed cultures and wastewater from the rice processing as substrate. [5] carried out similar experiments and observed that the granule formation was formed on the 173rd day of operation, and from that moment, the hydrogen production was stable for an 8-month period. [6] Studied the feasibility of producing hydrogen by treating cheese whey in UASB reactors and noted that the H_2 production was of $112 \text{ mLH}_2 \cdot \text{L}^{-1} \cdot \text{d}^{-1}$ for an organic load of $20 \text{ g COD} \cdot \text{L}^{-1} \cdot \text{d}^{-1}$ and $2.5 \text{ g COD} \cdot \text{VSS}^{-1} \cdot \text{d}^{-1}$. These authors state that, although these values are low, the possibility of using UASB reactors fed with industrial wastewaters for the production of hydrogen was proven. [7] evaluated the production of hydrogen after the production of methane in UASB reactors by treating wastewaters from the cassava industry. They used as inoculum active sludge from an anaerobic lagoon previously treated with thermal shocks for inhibiting methanogenic organism and optimizing the production of hydrogen on its first stage. The results were promising not only because of the reactor used but also because was used real industrial wastewater. The maximum hydrogen production reached 37% with a volumetric organic load of $25 \text{ KgCOD} \cdot \text{m}^{-3} \cdot \text{d}^{-1}$. At a high load, the system collapsed and the hydrogen production was reduced mainly due to the accumulation of fatty organic acids.

Despite the already known advantages of UASB reactors, the practical application of these systems for producing hydrogen is still limited, mainly due to long initial times, the type of inoculum capable of minimising the biomass drag, proper handling of hydraulic detention times, etc. [8] mentioned that, by placing supporting structures at the suspension, the process could be accelerated; this is known as hybrid UASB. [9] used a hybrid UASB reactor to treat wastewaters with phenolic compounds. The reactor consisted of an acrylic cylinder at a bench scale in which approximately 54 rings were placed in a 30.48 cm in the middle of the reactor. Hence, a larger biomass concentration would be retained at shorter hydraulic retention time. The results showed that the anaerobic hybrid reactor tolerates 2.5 times more the phenolic organic load increase than the conventional UASB reactor. [10] also demonstrated that having an area with a filtering medium in suspended biomass anaerobic reactors improves the contact between the substrate and the sludge, minimizing the sludge loss and reducing the hydraulic retention time.

The Hydraulic Retention Time (HRT) is one of the operational variables that can be easily manipulated to optimize the hydrogen production. [11] compared the hydrogen production using glucose as a carbon source in a

CSTR and UASB reactor with different HRT values (12-2 h). They discovered that there was more stability in UASB reactors and larger volumetric production values of H_2 , $19.05 \text{ mmolH}_2 \cdot \text{L}^{-1} \cdot \text{h}^{-1}$ for a 2 h of HRT. Research conducted by [12] treating wastewater with starch as a carbon source and activated carbon as support in an expanded bed anaerobic reactor concluded that the HRT with the highest volumetric production values was 4 h. These authors modified the HRT to a 24-4 h rate. Recently conducted research by [13] shows that unlike what was previously thought, at low HRTs in both conventional UASB reactors and packed bed reactors, the hydrogen production considerably decreases, being more noticeable at UASB reactors than at packed bed reactors.

In this sense, this research evaluated the effects of three different HRT on H_2 production at conventional and hybrid UASB reactors, using on the top of the reactor a layer of polyethylene rings with foam of polyurethane in its center. This work could contribute to practical knowledge for the hydrogen production at UASB reactors.

2. Material and methods

2.1. Experimental design

Two Upflow Anaerobic Sludge Blanket Reactors (UASB) were used, a hybrid one (R_1) and a conventional one (R_2) with an internal diameter of 74 mm and a useful volume of 2.94 L and 3.0 L, respectively (Fig. 1). The Setting of the R_1 reactor is characterized by the addition of a suspended bed of 100 mm in height composed of high-density polyethylene rings ($\varnothing=19 \text{ mm}$ and 10 mm in height) that contains a polyurethane foam core, with the purpose of avoiding sudden biomass washing and improving the biogas production stability [14,15]. The specific surface area of each ring is $950 \text{ m}^2 \cdot \text{m}^{-3}$.

The reactors operated with a constant flow for 134 and 104 days, respectively. The operation time for R_1 was 12 h for 39 days and the second stage with an 8h for 48 days; and the third stage with a 4 h for 45 days. On the other hand, the R_2 reactor was operated with a 12 h, 8 h and 4 h HRT for 45, 40 and 12 days, respectively. The reactors were placed in a thermocontrolled chamber at a constant temperature of 35°C

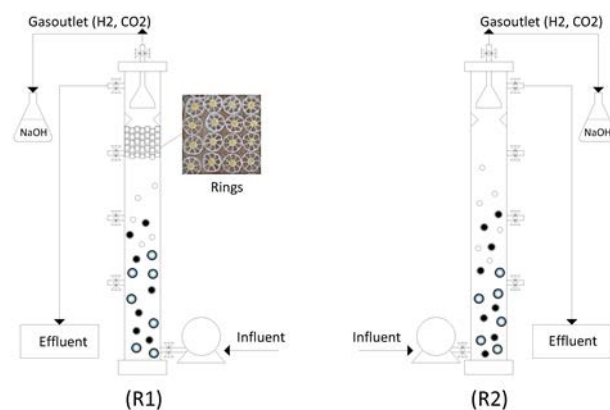


Figure 1. Schematic diagram of the UASB hybrid (R_1) and conventional (R_2) reactors.

Source: The authors.

The reactors were fed with synthetic wastewater using the sucrose as a carbon source. Additionally, an inorganic nutritional source used by [1] was added that contains $\text{CH}_4\text{N}_2\text{O}$ (20 mg.L⁻¹), $\text{NiSO}_4 \cdot 6\text{H}_2\text{O}$ (0.5 mg. L⁻¹), $\text{FeSO}_4 \cdot 7\text{H}_2\text{O}$ (2.5 mg. L⁻¹), $\text{FeCl}_3 \cdot 6\text{H}_2\text{O}$ (0.25 mg. L⁻¹), $\text{CaCl}_2 \cdot 2\text{H}_2\text{O}$ (2.06 mg.L⁻¹), $\text{CoCl}_2 \cdot 2\text{H}_2\text{O}$ (0.04 mg. L⁻¹), SeO_2 (0.036 mg. L⁻¹), KH_2PO_4 (1.3 mg. L⁻¹), KHPO_4 (5.36 mg. L⁻¹) and $\text{Na}_2\text{HPO}_4 \cdot 2\text{H}_2\text{O}$ (2.76 mg. L⁻¹). The volumetric organic load for the three operation stages was kept at 11.26 Kg COD m⁻³.d⁻¹, which improve a stable hydrogen production at fixed biomass reactors using recycled pneumatic as support [16] (Mendez et al. 2017). The initial pH of the synthetic wastewater was adjusted at 5.5, adding HCL (10 M).

For both reactors, the inoculum was obtained using the natural fermentation mechanism. Some authors like [17-19] demonstrated that this fermentation that is caused by the combination between the microorganism present in the atmosphere and in the tap water is beneficial to maintain the acidogenic conditions.

2.2. Analytical methods

Percentage concentrations of H_2 , CO_2 and CH_4 were simultaneously measured using the gas chromatography equipment Agilent 7890A GC with a thermal conductivity detector (TCD) and a capillary column Carboxen 1010 plot, with a length of 30 m, 0.32 mm internal diameter and 25 μm of the internal stationary layer. The carrier gas was Argon and the injection volume was of 0.6 mL. The average values were the result of three measurements per sample.

The physical-chemical parameters of the influent and effluent samples were monitored three times per week. The organic content (COD), the total volatile acid amount (TVA), volatile suspended solids (VSS), and pH were assessed following the standard methods guideline [20]. The concentration of total carbohydrates in the influent and effluent of the reactor were analyzed using the phenol method [21].

2.3. Statistical analysis

The OriginPro (Version 8.0) software was used to conduct the statistical analysis of variance (ANOVA) of only one path to determine the statistically significant differences ($p < 0.05$) between the measured and calculated parameter for each reactor at the different HRT. In addition, the Tukey test was conducted to do multiple comparisons between the parameter averages studied with 95% reliability. For each parameter, a statistical description was applied.

3. Results

From Figs. 2 and 3, it is evident that the suspended bed in the R_1 reactor improves the system performance regarding stability in the hydrogen production. Not only the production is stable throughout the entire operation process, but the percentage value of the hydrogen gas also remains over 50%. This is not the case of the total volatile acid behavior, which despite a percentage production over 90%, there is no visible difference related to the type of reactor, indicating that its production is probably affected by the biomass inside the biological reactors. These results are

confirmed with the ANOVA test, $p=0.8203$ for R_1 and $p=0.2194$ for R_2 , and it shows that there was no significant difference on the TVA production for both reactors at the different studied HRT values. These observations contradict the stated by authors such as [22] Kim et al., (2013) who, from several experiments varying the HRT from 0.5 to 2.5 days determined that this parameter has a direct influence on the TVA production.

[23] on a deep revision about the anaerobic digestion emphasise that this technology is not only designed to treat wastewater with high organic loads and to produce methane, but it must also be planned to produce hydrogen separately or simultaneously with methane and other byproducts with high added value such as volatile fatty acids (VFA). It is important to mention that VFAs are considered to be probable precursors of the biopolymer production and other products such as biofuels, alcohols, aldehyde and ketones.

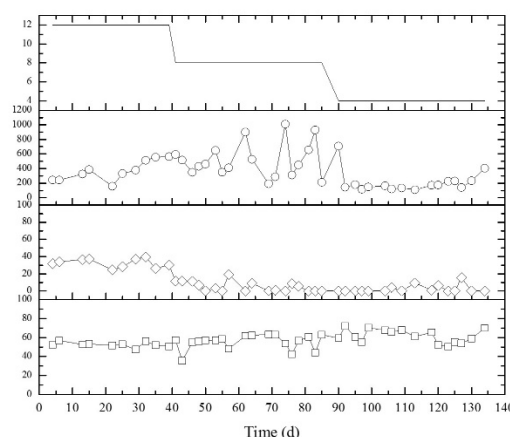


Figure 2. Performance of UASB Hybrid reactor (R_1). (—○—, Total volatile acids in the effluent as mgHAc/L, —◇—, production of CO_2 in %, —□—, production of H_2 in %, — Hydraulic retention time).

Source: The authors.

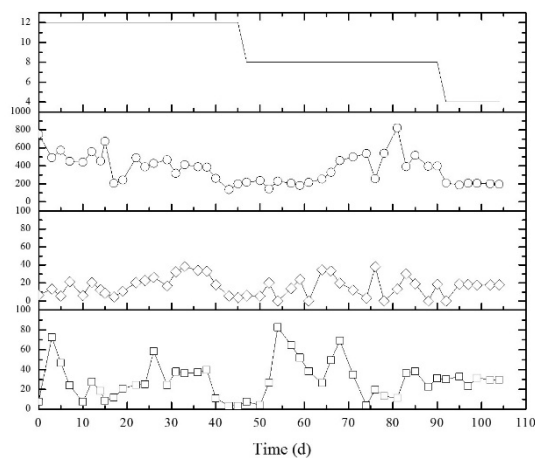


Figure 3. Performance of UASB Conventional reactor (R_2). (—○—, Total volatile acids in the effluent as mgHAc/L, —◇—, production of CO_2 in %, —□—, production of H_2 in %, — Hydraulic retention time).

Source: The authors.

Although the purpose of this research was evaluating the influence of HRT on biohydrogen production in two different high rate anaerobic reactors, it was noted that the TVA results showed methanogenesis inhibition and very low pH values at the effluent, on average 3.4 ± 0.2 and 3.3 ± 0.2 for the R_1 and R_2 reactors respectively. This behavior was already mentioned by [24,25], who state that, when there is an accumulation of volatile organic acids in the system, there is also a pH reduction, causing destabilisation in the anaerobic process represented by inhibition in the methane production.

[6,26] show that there is both a minimum value of volatile acid where the inhibition of methanogenesis is produced and a maximum value where hydrogen-producing organisms are inhibited at $400 \text{ mgHAc. L}^{-1}$ for the first and $10,000 \text{ mgHAc. L}^{-1}$ for the second. On this research in particular, the minimum value for R_1 was $101.95 \text{ mgHAc. L}^{-1}$ (113th day of operation) and the maximum value was $1008.48 \text{ mgHAc. L}^{-1}$ (74th day of operation). For R_2 , the values were $138.67 \text{ mgHAc. L}^{-1}$ (43st day of operation) and $822.42 \text{ mgHAc. L}^{-1}$ (81st day of operation). With these results, we can observe that the minimum values in which there is inhibition of methanogenesis are lower than the ones found in the literature.

At reactor R_1 , in which the hydrogen production was more stable, there was no accumulation of organic acids that would increase toxicity at hydrogen producers. A possible explanation to this observation can be that the pH value in the system was always kept at 3.5 units, which creates an extremely acid environment that permits that there are not associated this contributes to a reduction of toxicity amongst microorganisms.

On the other hand, [27] state that the organic loading rate (OLR) does have an influence on the variation and accumulation of organic volatile acids, unlike other parameters. Amongst the results presented by these authors, it is important to highlight the proportional increase in the total volatile acid concentration when they vary the organic load at molasses synthetic wastewater. The TVAs increased their concentration from 2.000 mg. L^{-1} to 7.000 mg. L^{-1} with values from 5 to $12 \text{ Kg COD. m}^{-3} \cdot \text{L}^{-1}$, respectively. Furthermore, it is important to highlight that butyric acid shows the highest percentage at the total value.

Particularly, the organic loading rate (OLR) value was taken from previous results in reactors similar to ours, whose purpose was finding the load that would permit a good stability when producing hydrogen. These results can be consulted at Show and Tay, (1999) who found that, with load values above $11.26 \text{ Kg COD. m}^{-3} \cdot \text{d}^{-1}$, not only was the system unstable when producing hydrogen, but there was also a percentage reduction of total volatile acids from 90% to 60%. The latter one indicates that there is a limit in the organic load value that optimises the production of organic acids and that it also guarantees stable and concomitant hydrogen production.

The results from ANOVA and the TUKEY test for reliability levels of 95% showed that there was a significant difference on the hydrogen production value for the R_1 reactor ($p=0.0033$) during the 12 and 4 h; and the 8 and 4 h. As for R_2 , ($p=0.4333$), the result was different due to its high instability during the process. The average hydrogen

production at reactor R_1 was 53 ± 3 , 55 ± 8 , and 62 ± 7 % for 12.8 and 4h, respectively. While the hydrogen production value for R_2 did not exceed the average value of 35 ± 21 % presented at the 8 h, previous results indicated that the hydrogen production especially depends on the reactor setting and on the operation using low HRT values. The latter is similar to the stated by authors such as [29-30], who showed that the H_2 content in biogas is lower when the HRT value increases. This behavior is also detailed by [31,12], who mentioned that high HRTs allow the consumption of H_2 through methanogenesis and homoacetogenesis at high rate continuous stirred tank reactors (CSTR), packed bed reactors (PBR), and UASB. Moreover, authors such as [32] indicate that low HRT values affect the ability to hydrolyse substrate and, therefore, affect the possibility of reaching high H_2 production rates.

It is evident that the R_2 reactor setting is less appropriate for the production of hydrogen. [7,33] mention that a biomass loss significantly affects both H_2 production and the process stability. For instance, authors such as [3,34], who used hybrid UASB reactors with carbon nanotubes and plastic pall rings, respective, obtained H_2 production values of 50%, similar to our R_1 reactor, using a 12h. Whereas [5] obtained a H_2 production of 42% using a conventional UASB reactor with an 8h HRT.

According to [25], the H_2 content in the produced gas increases when the organic load reaches an optimal value of $68 \text{ Kg. m}^{-3} \cdot \text{d}^{-1}$. Then, from that value despite the load increase of up to $79 \text{ Kg. m}^{-3} \cdot \text{d}^{-1}$, the hydrogen percentage decreases about 30% whereas the CO_2 content in the gas notably increases up to 80%. On our research, a larger concentration of hydrogen gas than carbon dioxide was observed. R_1 showed CO_2 values close to 0% especially after the 40th day of operation, which was the end of the 12 h. In the R_2 reactor, the behavior was different; not only was it oscillating like hydrogen gas, but also 40% values were reached (Figs. 2 and 3). [35] mentions that low H_2 productions are caused by non- H_2 producing bacteria that produce, instead, excessive amounts of CO_2 from the sucrose conversion.

Table 1.

Comparison of optimal values for the production of hydrogen at different bioreactor settings.

Parameters	[26]	Apud by [26]	[36]	This study - Hybrid UASB
Organic load ($\text{Kg m}^{-3} \cdot \text{d}^{-1}$)	68.0	30.0	75.0	11.3
% H_2 in the Biogas	43.0 ± 0.3	38 ± 0.5	35.0	62.0 ± 7.0
VSS Concentration in the reactor (mg L^{-1})	3200 ± 0.2	13000 ± 0.2	20000	7525.0
VSS Concentration in the effluent (mg L^{-1})	4500 ± 0.42	4000 ± 0.3	30000	60.0 ± 43.0
TVA (mgHAc L^{-1})	13300 ± 0.3	12600 ± 0.4	6200	1008 ± 229.0
Removal of COD (%)	32.0 ± 0.3	20.0 ± 0.3	40.0	13.0 ± 9.0
HRT (h)	---	---	5 day	4.0

Source: The authors.

The latter validates the already explained regarding the optimisation of a H_2 producing system in the sense that HRT variations do not have an influence on the system's stability, which particularly depends on the organic load value, the reactor's setting and the inoculation methodology that, as it was observed, have improved the reactor's performance thus allowing it to appropriately maintain the acidogenesis stage.

From Table I, there is a comparison amongst the different types of reactors and the optimal conditions observed for the production of hydrogen. These results were more remarkable regarding percentage productions, which were higher than the previously mentioned, thus contradicting the stated by authors such as [25,36], who claim that thermophilic bacteria are more efficient for this kind of process.

4. Conclusions

This research verifies that placing Biopack® rings with polyurethane foam in its core, in UASB-reactors, allows its use for producing hydrogen. The maximum reached gas percentage was $62 \pm 7\%$, obtained at 4 h of HRT, thus showing that the process is favored by low hydraulic retention time. Furthermore, it is important to highlight that the support media not only allowed minimizing the loss of biomass, but also contributes to the stability of the hydrogen production if compared with a conventional UASB reactor. Lastly, it was observed that the 90% increase of total volatile acids in both conventional and hybrid UASB reactors had no effect on the hydrogen production.

Acknowledgement

The authors wish to acknowledge to Military University for financial support by the project INV- ING 2104 and to the Sanitation Laboratory for technical support.

References

- [1] Peixoto, G., Saavedra, N.K., Varesche, M.B.A. and Zaiat, M., Hydrogen production from soft-drink wastewater in an upflow anaerobic packed-bed reactor, *Int. J. Hydrogen Energy*, 36(15), pp. 8953-8966, 2011. DOI: 10.1016/j.ijhydene.2011.05.014.
- [2] Li, W.W. and Yu, H.Q., *Biohydrogen production with high-rate bioreactors*, 1st ed. Elsevier Inc., 2011. DOI: 10.1016/B978-0-12-385099-7.00025-5.
- [3] Kahyaoglu, M., Şahin, Ö. and Saka, Ö., Biohydrogen production from waste substrates as a clean energy sources, Part A recover. *Util. Environ. Eff.*, 34(12), pp. 1084-1103, 2012. DOI: 10.1080/15567031003753546.
- [4] Yu, H., Zhu, Z., Hu, W. and Zhang, H., Hydrogen production from rice winery wastewater in an upflow anaerobic reactor by using mixed anaerobic cultures, *Int. J. Hydrogen Energy*, 27(11-12), pp. 1359-1365, 2002. DOI:10.1016/S0360-3199(02)00073-3.
- [5] Chang, C. and Feng-Yuan, L., Biohydrogen production using an upflow anaerobic sludge blanket reactor, *Int. J. Hydrogen Energy*, 29(1), pp. 33-39, 2004. DOI: 10.1016/S0360-3199(03)00082-X.
- [6] Castelló, E., García y Santos, C., Iglesias, T., Paolino, W., Wenzel, W., Borzacconi, J.L. and Etchebehere, C., Feasibility of biohydrogen production from cheese whey using a UASB reactor: Links between microbial community and reactor performance, *Int. J. Hydrogen Energy*, 34(14), pp. 5674-5682, 2009. DOI: 10.1016/j.ijhydene.2009.05.060.
- [7] Intanoo, P., Chaimongkol, P. and Chavadej, S., Hydrogen and methane production from cassava wastewater using two-stage upflow anaerobic sludge blanket reactors (UASB) with an emphasis on maximum hydrogen production, *Int. J. Hydrogen Energy*, 41(14), pp. 6107-6114, 2016. DOI: 10.1016/j.ijhydene.2015.1.125
- [8] Lew, B., Tarre, S., Belavski, M. and Green, M., UASB reactor for domestic wastewater treatment at low temperatures: A comparison between a classical UASB and hybrid UASB-filter reactor, *Water Sci. Technol.*, 49(11-12), pp. 295-301, 2004.
- [9] Ramakrishnan, A. and Surampalli, R.Y., Comparative performance of UASB and anaerobic hybrid reactors for the treatment of complex phenolic wastewater, *Bioresour. Technol.*, 123, pp. 352-359, 2012. DOI: 10.1016/j.biortech.2012.07.072.
- [10] Zhang, Y., Ma, Y., Quan, X., Jing, Y. and Dai, S., Rapid startup of a hybrid UASB-AFF reactor using bi-circulation, *Chem. Eng. J.*, 155(1-2), pp. 266-271, 2009. DOI: 10.1016/j.cej.2009.08.005.
- [11] Gavala, H.N., Skiadas, I.V. and Ahring, B.K., Biological hydrogen production in suspended and attached growth anaerobic reactor systems, *Int. J. Hydrogen Energy*, 31(9), pp. 1164-1175, 2006. DOI: 10.1016/j.ijhydene.2005.09.009.
- [12] Guo, W.Q., Ren, N.Q., Chen, Z.B., Liu, B.F., Wang, X.J., Xiang, W.S. and Ding, J., Simultaneous biohydrogen production and starch wastewater treatment in an acidogenic expanded granular sludge bed reactor by mixed culture for long-term operation, *Int. J. Hydrogen Energy*, 33(24), pp. 7397-7404, 2008. DOI: 10.1016/j.ijhydene.2008.09.039.
- [13] Si, B., Liu, Z., Zhang, Y., Li, J., Shen, R., Zhu, Z. and Xing, X., Towards biohythane production from biomass: Influence of operational stage on anaerobic fermentation and microbial community, *Int. J. Hydrogen Energy*, 41(7), pp. 4429-4438, 2016. DOI: 10.1016/j.ijhydene.2015.06.045.
- [14] Karadag, D., Köroğlu, O.E., Ozkaya, B. and Cakmakci, M., A review on anaerobic biofilm reactors for the treatment of dairy industry wastewater, *Process Biochem.*, 50(2), pp. 262-271, 2015. DOI: 10.1016/j.procbio.2014.11.005.
- [15] Choi, W.-H., Shin, C.-H., Son, S.-M., Ghorpade, P.A., Kim, J.-J. and Park, J.-Y., Anaerobic treatment of palm oil mill effluent using combined high-rate anaerobic reactors, *Bioresour. Technol.*, 141, pp. 138-44, 2013. DOI: 10.1016/j.biortech.2013.02.055.
- [16] Mendez, A., Torres, Y. and Chaparro, R.T., Effect of organic loading rate in hydrogen production with different support materials in anaerobic fixed-bed reactors, *Rev. Ing. Investig. y Tecnol.*, XVIII(2), pp. 223-232, 2017.
- [17] Chen, W., Tseng, Z., Lee, K. and Chang, J., Fermentative hydrogen production with CGS5 isolated from anaerobic sewage sludge, *Int. J. Hydrogen Energy*, 30(10), pp. 1063-1070, 2005. DOI: 10.1016/j.ijhydene.2004.09.008.
- [18] Fernandes, B.S., Saavedra, N.K., Maintinguer, S.I., Sette, L.D., Oliveira, V.M., Varesche, M.B. and Zaiat, M., The effect of biomass immobilization support material and bed porosity on hydrogen production in an upflow anaerobic packed-bed bioreactor, *Appl. Biochem. Biotechnol.*, 170(6), pp. 1348-66, 2013. DOI: 10.1007/s12010-013-0262-7.
- [19] Fontes-Lima, D.M., Moreira, W.K. and Zaiat, M., Comparison of the use of sucrose and glucose as a substrate for hydrogen production in an upflow anaerobic fixed-bed reactor, *Int. J. Hydrogen Energy*, 38(35), pp. 15074-15083, 2013. DOI: 10.1016/j.ijhydene.2013.09.003.
- [20] APHA, *Standard methods for examination of water and wastewater*, 21th ed. Washington, 2005.
- [21] Herbert, D., Phipps, P.J. and Strange, R.E., Chemical analysis of microbial cells, *Chem. Anal. Microb. Cells*, pp. 209-344, 1971. DOI: 10.1016/S0580-9517(08)70641-X.
- [22] Kim, W., Shin, S.G., Lim, J. and Hwang, S., Effect of temperature and hydraulic retention time on volatile fatty acid production based on bacterial community structure in anaerobic acidogenesis using swine wastewater, *Bioprocess Biosyst. Eng.*, 36(6), pp. 791-798, 2013. DOI: 10.1007/s00449-013-0905-7.
- [23] Khan, M.A., Ngo, H.H., Guo, W.S., Liu, Y., Nghiem, L.D., Hai, F.I., Deng, L.J., Wang, J. and Wu, Y., Optimization of process parameters for production of volatile fatty acid, biohydrogen and methane from anaerobic digestion, *Bioresour. Technol.*, 219, pp. 738-748, 2016. DOI: 10.1016/j.biortech.2016.08.073.

- [24] Fezzani, B. and Cheikh, R.B., Two-phase anaerobic co-digestion of olive mill wastes in semi-continuous digesters at mesophilic temperature, *Bioresour. Technol.*, 101(6), pp. 1628-1634, 2010. DOI: 10.1016/j.biortech.2009.09.067.
- [25] Cysneiros, D., Banks, C.J., Heaven, S. and Karatzas, K.A.G., The effect of pH control and 'hydraulic flush' on hydrolysis and Volatile Fatty Acids (VFA) production and profile in anaerobic leach bed reactors digesting a high solids content substrate, *Bioresour. Technol.*, 123, pp. 263-271, 2012. DOI: 10.1016/j.biortech.2012.06.060.
- [26] Intanoo, P., Rangsuvigitt, P., Namprohm, W., Thamprajamchit, B., Chavadej, J. and Chavadej, S., Hydrogen production from alcohol wastewater by an anaerobic sequencing batch reactor under thermophilic operation: Nitrogen and phosphorous uptakes and transformation, *Int. J. Hydrogen Energy*, 37(15), pp. 11104-11112, 2012. DOI: 10.1016/j.ijhydene.2012.04.129.
- [27] Wijekoon, K.C., Visvanathan, C. and Abeynayaka, A., Effect of organic loading rate on VFA production, organic matter removal and microbial activity of a two-stage thermophilic anaerobic membrane bioreactor, *Bioresour. Technol.*, 102(9), pp. 5353-5360, 2011. DOI: 10.1016/j.biortech.2010.12.081.
- [28] Show, K.Y. and Tay, J.H., Influence of support media on biomass growth and retention in anaerobic filters, *Water Res.*, 33(6), pp. 1471-1481, 1999. DOI: 10.1016/S0043-1354(98)00352-2.
- [29] Mu, Y., Wang, G. and Yu, H.Q., Response surface methodological analysis on biohydrogen production by enriched anaerobic cultures, *Enzyme Microb. Technol.*, 38(7), pp. 905-913, 2006. DOI: 10.1016/j.enzmictec.2005.08.016.
- [30] Chang, F. and Lin, C., Fermentative hydrogen production using granulated sewage sludge microflora, *J. Environ. Eng. Manag.*, 17(1), pp. 57-62, 2007.
- [31] Yun, J.H. and Cho, K.S., Effect of hydraulic retention time on suppression of methanogens during a continuous biohydrogen production process using molasses wastewater, *J. Environ. Sci. Heal. Part A*, 0(0), pp. 1-8, 2016. DOI: 10.1080/10934529.2016.1221221.
- [32] Nualsri, C., Reungsang, A. and Plangklang, P., Biochemical hydrogen and methane potential of sugarcane syrup using a two-stage anaerobic fermentation process, *Ind. Crops Prod.*, 82, pp. 88-99, 2016. DOI: 10.1016/j.indcrop.2015.12.002.
- [33] Liu, Z., Lv, F., Zheng, H., Zhang, C., Wei, F. and Xing, X.H., Enhanced hydrogen production in a UASB reactor by retaining microbial consortium onto carbon nanotubes (CNTs), *Int. J. Hydrogen Energy*, 37(14), pp. 10619-10626, 2012. DOI: 10.1016/j.ijhydene.2012.04.057.
- [34] Mohammadi, P., Ibrahim, S. and Mohamad-Annuar, M.S., High-rate fermentative hydrogen production from palm oil mill effluent in an up-flow anaerobic sludge blanket-fixed film reactor, *Chem. Eng. Res. Des.*, 92(10), pp. 1811-1817, 2014. DOI: 10.1016/j.cherd.2014.04.023.
- [35] Chang, J., Lee, K. and Lin, P., Biohydrogen production with fixed-bed bioreactors, *Int. J. Hydrogen Energy*, 27, pp. 1167-1174, 2002.
- [36] Krishnan, S., Singh, L., Sakinah, M., Thakur, S., Wahid, Z.A. and Sohaili, J., Effect of organic loading rate on hydrogen (H₂) and methane (CH₄) production in two-stage fermentation under thermophilic conditions using palm oil mill effluent (POME), *Energy Sustain. Dev.*, 34, pp. 130-138, 2016. DOI: 10.1016/j.esd.2016.07.002.

D.M. Hernández, received the BSc. Eng in Civil Engineering in 2012 from the Universidad Militar Nueva Granada and the Sp. degree in hydraulic resources and environment in 2017 from the Escuela Colombiana de Ingeniería Julio Garavito, Colombia. From 2014, she has been worked in scientific research projects related to the production of renewable energies and water treatment. She is currently Professor in the Civil Engineering Department at Universidad Militar Nueva Granada, Bogotá, Colombia. ORCID: 0000-0002-1505-7478.

L.A. del P. Hurtado, received the BSc. Eng in Mechatronics Engineering (2014) from Military University Nueva Granada, Bogotá, Colombia. From 2012 to 2015, she worked in heating, ventilation, and air conditioning projects for pharmaceutical and alimentary industry, with emphasis on automation and control development. In 2016 she began her research career in the Water Treatment group of Military University. Currently she is research assistant and has been involved in projects under the guidance of PhD. Tatiana Rodriguez in energy recovery from wastewater treatment and applications on conversion devices such as fuel cells. In addition, she has worked in the implementation of instrumentation and real time monitoring of laboratory scale anaerobic reactors in environmental sanitation Laboratory, Military University. ORCID: 0000-0002-9362-882X.

A.T. Rodriguez-Chaparro, received the BSc. in Civil Engineering from Universidad Militar Nueva Granada, Colombia (1999), MSc. degree in Civil Engineering from Universidad de Los Andes, Colombia (2002) and Dr. in Hydraulic and Sanitation from Universidad de Sao Paulo (Brazil). Associated professor at Civil Department in the Military University and head of the Sanitation Laboratory. With experience in wastewater treatment in particular in anaerobic processes and advanced oxidation processes for the treatment of recalcitrant and toxic compounds. ORCID: 0000-0002-0600-5414



UNIVERSIDAD NACIONAL DE COLOMBIA

SEDE MEDELLÍN

FACULTAD DE MINAS

Área Curricular de Medio Ambiente

Oferta de Posgrados

Especialización en Aprovechamiento de
Recursos Hidráulicos

Especialización en Gestión Ambiental

Maestría en Ingeniería Recursos Hidráulicos

Maestría en Medio Ambiente y Desarrollo

Doctorado en Ingeniería - Recursos Hidráulicos

Doctorado Interinstitucional en Ciencias del Mar

Mayor información:

E-mail: acma_med@unal.edu.co

Teléfono: (57-4) 425 5105