



Revista Brasileira de Ciência Avícola

ISSN: 1516-635X

revista@facta.org.br

Fundação APINCO de Ciência e
Tecnologia Avícolas
Brasil

Araújo, FE; Garcia, RG; Nääs, IA; Lima, NDS; Silva, RBTR; Caldara, FR
Broiler Surface Temperature and Behavioral Response under Two Different Light Sources
Revista Brasileira de Ciência Avícola, vol. 17, núm. 2, abril-junio, 2015, pp. 219-226
Fundação APINCO de Ciência e Tecnologia Avícolas
Campinas, Brasil

Available in: <http://www.redalyc.org/articulo.oa?id=179742203012>

- How to cite
- Complete issue
- More information about this article
- Journal's homepage in redalyc.org

redalyc.org

Scientific Information System

Network of Scientific Journals from Latin America, the Caribbean, Spain and Portugal

Non-profit academic project, developed under the open access initiative



■ Author(s)

Araújo FE¹
Garcia RG¹
Nääs IA¹
Lima NDS¹
Silva RBTR¹
Caldara FR¹

¹ Universidade Federal da Grande Dourados

■ Mail Address

Corresponding author e-mail address
Rodrigo Garcia
Universidade Federal da Grande
Dourados-FCA, Dourados, MS, Brazil
Phone: +55 67 34102437
E-mail: rodrigogarcia@ufgd.edu.br

■ Keywords

Monochromatic light, LED, welfare, broiler activity.

Submitted: July/2014
Approved: January/2015

Broiler Surface Temperature and Behavioral Response under Two Different Light Sources

ABSTRACT

Light is an important environmental variable for the regulation and control of broiler behavior. Some light sources may also add heat to the rearing environment, and indirectly affect the heat exchange between the birds and the environment. This study aimed at investigation the surface temperature and behavioral response of broilers reared in an environment with monochromatic light emitted diode (LED). Broilers were reared inside commercial dark houses under two treatments: fluorescent or LED light sources. Bird surface temperature and behavior was monitored from the first day of grow-out. The houses were virtually divided in four quadrants, and the variables were monitored in the geometric center of each quadrant. Surface temperature results were mapped, behavioral responses were divided as normal and abnormal, and their interaction with light source was tested. Broiler surface temperature in both houses presented lack of homogeneity, independently of the light source. No effect of the light source on any of the evaluated behavior was found in the present study. The long life and energy savings obtained with the LED light source suggest its use in broiler production.

INTRODUCTION

Broiler production has greatly developed in recent decades due to technological innovations in genetics, nutrition, and rearing environment. Ambient temperature influences broiler performance particularly during the last week of the rearing period. Exposure to heat stress reduces feed intake, consequently impairing broiler performance (Abeyesinghe *et al.*, 2001; Tao & Xin, 2003; Shinder *et al.*, 2007; Amaral *et al.*, 2011).

Amongst the strategies to prevent productivity losses due to heat stress, lighting control has been successfully applied. Broilers exposed to low light (< 5 lx) produce less sensible heat in the fourth and fifth weeks of the rearing period (Lin *et al.*, 2006).

Broiler welfare is affected by the light management in the rearing environment. Literature has shown that high light intensity in poultry houses induces motor activity and possible exhaustion of birds beyond the onset of locomotion abnormalities (Prayitno *et al.*, 1997; Bessei, 2006). In a literature review, Olanrewaju *et al.* (2006) reported increased broiler activity in brighter rearing environments (6 to 12 lx) vs. darker (0.5 lx) areas. The authors state that most modern lighting programs begin with a high light intensity (~20 lx) that is decreased to around 5 lx by 14 to 21 days; and then maintained at 5 lx or less for the remainder of the grow-out period.



Preference studies using several lighting intensities have shown that broilers exhibit a preference for light intensity by six week of age. Young chicks (1 to 28 d of age) preferred brighter light (~20lx) (Berk, 1995). Another preference study showed that broilers preferred blue or green light to red or white light (Prayitno *et al.*, 1997).

Light sources, distribution, and color, as well as the duration of the lighting period can affect broiler flock performance, behavior, and welfare (Kristensen *et al.*, 2007; Mendes *et al.*, 2010). Behavior is an important variable used to assess animal welfare. Broilers can behave differently under the same light intensity from two different sources that look identical to observers (Prayitno *et al.*, 1997; Kristensen *et al.*, 2007; Gongruttananun & Guntapa, 2012).

Thermal analysis is a method for identifying variations in environment temperature and broilers heat loss. Thermal images allow mapping the birds' surface temperature and estimating their body thermoregulation, and ultimately the well-being of the flock (Aerts *et al.*, 2003). The ability of birds to dissipate heat decreases as ambient temperature and relative humidity rises above the thermal neutral zone (Yahav *et al.*, 2005; Lin *et al.*, 2006).

The most common types of lamps used in the Brazilian poultry industry are incandescent, fluorescent, and sodium vapor lamps (Mendes *et al.*, 2010). Light emitting diodes (LED) allows better uniformity of brightness distribution along the house than other sources of light. In addition, as LED lamps have a longer life than fluorescent light bulbs, the need to change bulbs is reduced (Rozenboim *et al.*, 1999).

The present study aimed at comparing dark-house lighting using fluorescent and monochromatic light (LED) sources relative to the surface temperature and the behavior of broilers.

METHODOLOGY

The study was conducted in two commercial broiler farms in Itaquiraí, state of Mato Grosso, Brazil, located at latitude 23° 28 '28" S and longitude 54 ° 11' 06" W, with a subtropical climate. The broiler houses were built according to the dark-house system, with forced negative ventilation, and were 150 m long, 15 m wide, and 3.80 m high. The tiles were made of fiber cement, and black polypropylene was used as drop-ceiling

material. The sidewalls were double: the outside wall was built with cement blocks, and the inner wall was drywall coated with black matte coating. Both houses were equipped with automatic feeders and nipple drinkers.

Two broiler houses were compared: one used fluorescent light source, and the other used LED lamps. The house with fluorescent lamps had manual control of brightness according to the age of the birds, and the house with LED light source had a light intensity automatic controller. The lighting program was applied according to the rearing phase, as follows: 23.0L:1.0D (0-7 days old), 18.0L:6.0D (8-21 days old), 20.0L:4.0D (22-35 days old), and 22.0L:3.0D (36-45 days old).

A total of 31,500 Cobb®500 broilers (straight-run flocks) were housed in both houses. The rearing environment was automatically controlled in both houses with the set points shown in Table 1. Birds were managed according to the genetic company's manual (Cobb, 2009).

Table 1– Set points used for the control of environmental temperature, relative humidity, and light intensity of the two evaluated dark houses.

Age (days)	Environmental Temperature (°C)	Relative Humidity (%)	Light intensity (lx)
7	31.0	76	25
14	29.0	75	5
21	27.0	73	5
28	26.0	70	5
35	24.0	63	5
42	23.0	69	5

Temperature variation= 2°C; relative humidity variation=2%

Data recording

The broiler houses were virtually divided into four quadrants, and data were recorded in the geometric center of each quadrant. Birds' surface temperatures (T_s) were recorded weekly using an infrared thermography camera (Testo® 880 V1.4, Germany) with an accuracy of ± 0.1 °C and 7.5 spectra of 13 μ . The camera was positioned at a height of 1 m above the birds in order to obtain images that included the entire targeted bird. Surface temperature was recorded in the morning at 10:00 AM. The coefficient of emissivity (ϵ) adopted was 0.95 for all regions of the bird, as suggested by Cangar *et al.* (2008). Twenty-four thermal images of birds were recorded, with six images of two birds per quadrant.



At the same time T_s was recorded, broiler behavior was assessed at 7, 14, 21, 28, 35 and 42 days of the grow-out period. Broiler behavior was assessed using a video camera (Sony® DCR-TRV330, USA). The video footage was taken of the broilers grouped in approximately 2 m² during 10 minutes in each quadrant, totaling 40 minutes per broiler house. Data were recorded for 20 min during the morning, from 8:00 to 9:00 AM, and for 20 min in the afternoon, from 2:00 to 3:00 PM.

Individual behaviors were classified into two categories (normal or abnormal) for analyses. This classification was based on the recommendations of Bizeray *et al.* (2002). The movements related to comfort (MC) were eating, drinking, walking, drinking, exploring, scratching, and dust bathing (Table 2), and were classified as normal or abnormal within each category. Relative to motion discomfort (MD), time budget analysis was performed considering normal and abnormal behaviors.

Data analysis

Ten surface temperature points were selected from the thermal images of each bird, and the average was calculated. These values were tested using the Student's t-test, assuming normality of the data. Data were processed using the online software Vassarstats®

(2014). The T_s variable was analyzed by the software Surfer® (2010) used to draw geostatistical maps.

Video recordings were performed inside the broiler houses to evaluate the birds' behavior. Hand video cameras were used, and detailed ethogram of the behaviors displayed was built. Direct observations were also performed. The images were obtained during 40 min in each house, being 10 minutes in each quadrant and covering an area of 2m². In total, 104 broilers were observed in the video footage taken at each poultry house.

An ethogram based on Bizeray *et al.* (2002) was built (Table 2). The following behaviors were recorded: sitting (BS), eating (E), drinking (D), worth exploring (WE), motion discomfort (MD), and scratching (S). Images with behaviors caused by isolated events (external noises, entry of people on the premises, among others) were not considered in the analysis.

Broiler behavior was classified according to the amount of time each behavior was performed during the observation period. The intensity scale used was: very little (1), little (2), normal (3), enough (4), too much (5). Normal (0) and abnormal (1) behaviors were recorded and analyzed. Descriptive analysis was applied to the data using the online statistic software Vassarstat (2014). The odds ratio was subsequently calculated using the online software Medcalc (2014), assuming normality of data.

Table 2 – Ethogram used to assess broiler behavior.

Behavior		Description
Sitting Eating Drinking Exploring Scratching Dust bathing	Motion Comfort	Normal and Abnormal
		When the breast of the bird is in contact with the litter.
		Eating or pecking at the feeder.
		Drinking water from the drinker.
		Exploring the area with the beak.
	Motion Discomfort	Normal and Abnormal
		When the bird explores its territory with its feet and beak, directed to the floor.
		Revolving the litter, spreading it on the body or on the floor of the rearing area.
		Movements to stretch wings and legs on the same side of the body simultaneously, shaking the feathers and/or flapping.

Adapted from Bizeray *et al.* (2002).

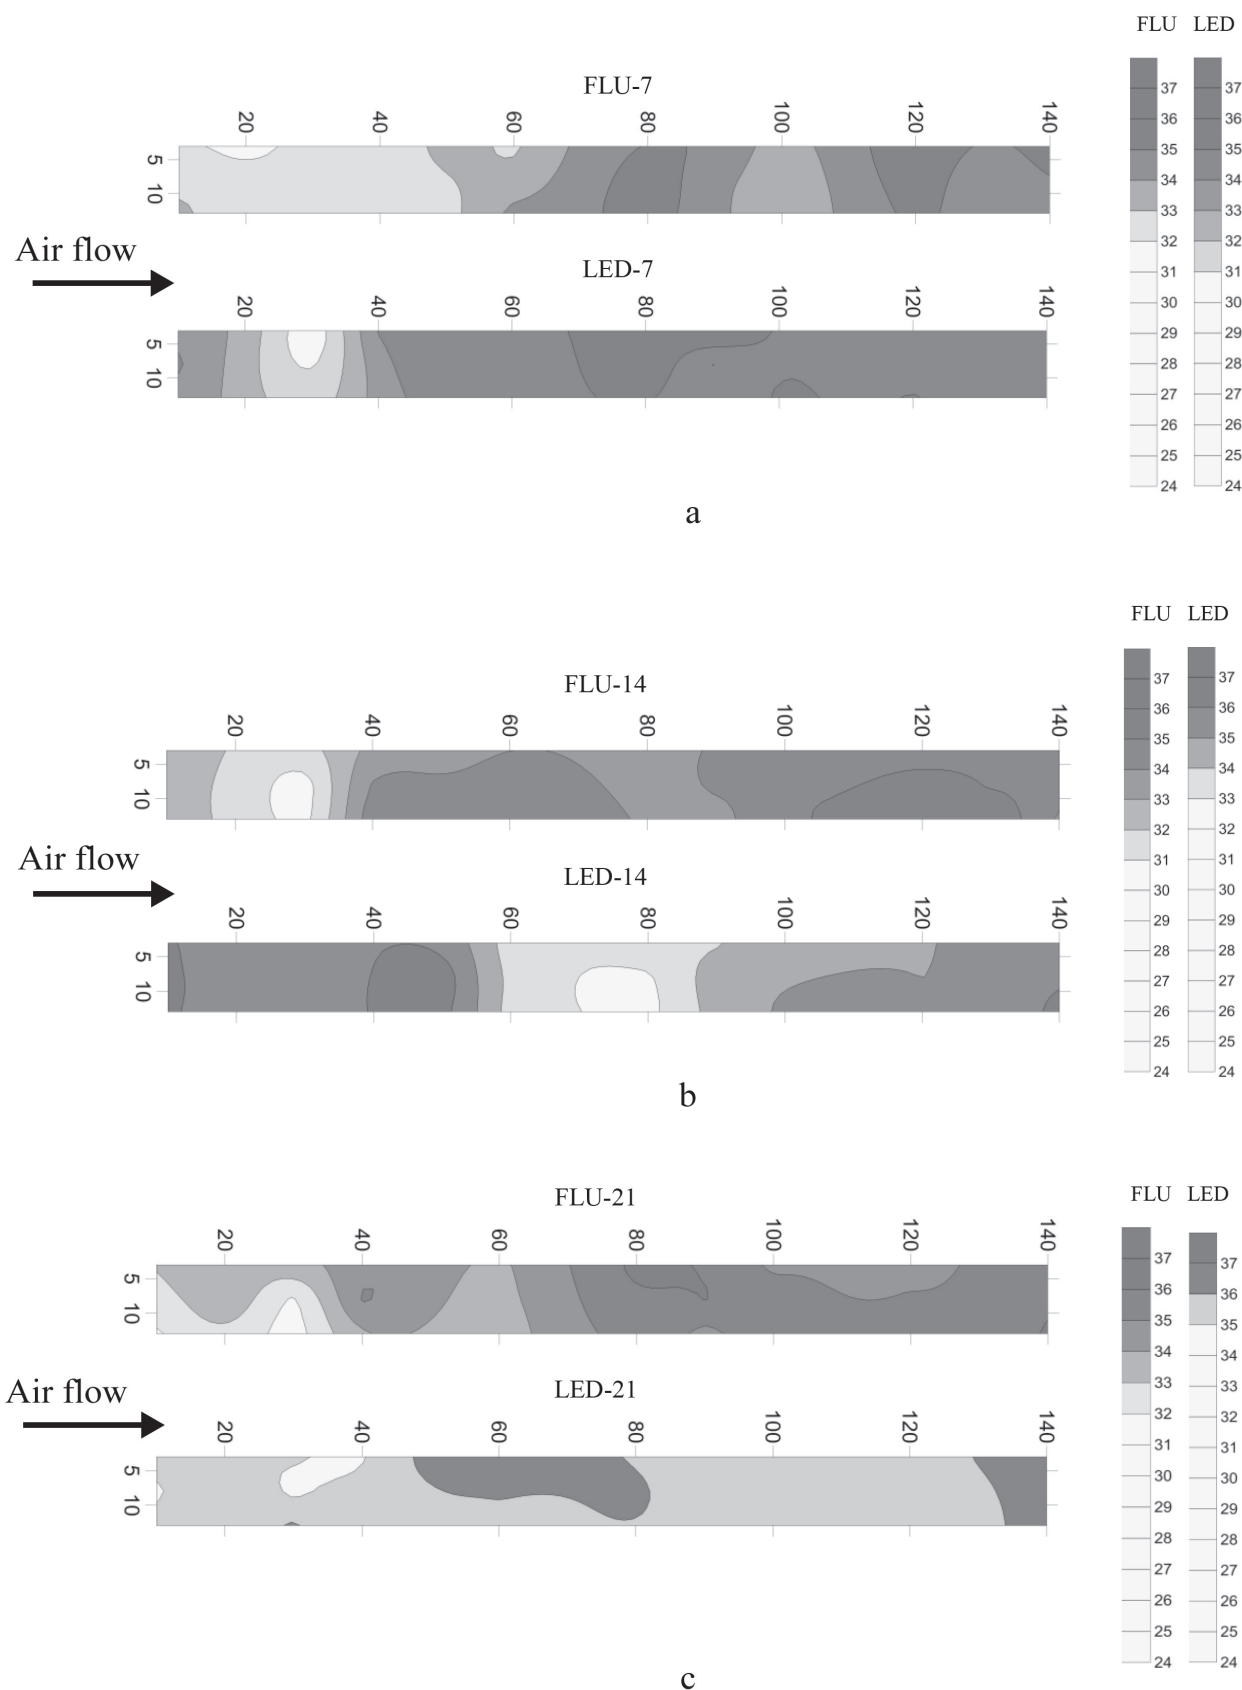


Figure 1 - Surface temperature (T_s) of broilers at 7 days of age inside broiler house with fluorescent lamps (FLU - 7) or with LED lamps (LED - 7) (a); at 14 days of age inside broiler house with fluorescent lamps (FLU - 14) or with LED lamps (LED - 14) (b); at 21 days of age inside broiler house with fluorescent lamps (FLU - 21) or with LED lamps (LED - 21) (c); per quadrant (range 0.5°C), corresponding to the starter rearing phase.



RESULTS AND DISCUSSION

Surface temperature during the initial grow-out phase

The spatial distribution of the broilers' surface temperature (T_s) in both houses during the starter phase (7, 14, and 21 days of age) is shown in Figure 1. Figure 2 presents the geostatistic maps of surface temperature during the finisher phase (28, 35, and 42 days of age). When birds were 7-d-old, T_s was lower (24 °C) at the entrance end of the house with fluorescent light source (FLU – 7) compared with the house with LED. A greater variation was found in the area in the middle towards the end of the house with LED (35 °C). The values of T_s in the LED house reached 24 °C, and, in general, temperature ranged between 33 °C and 35 °C in the house with fluorescent lighting when broilers were 7-d-old (Figure 1a). The mean value of ambient temperature inside the LED house at 7d was 31.0 ± 2 °C.

The T_s values when broilers were 14 days old in the house with fluorescent lamps (FLU – 14) remained lower at the air inlet and increased along the house. Inside the house with LED lamps (LED – 14), the lowest values T_s were observed in the middle of the house. T_s was higher in the house air inlet (36 °C) than in the outlet (34 – 36 °C) (Figure 1b) in the LED house. The mean value of ambient temperature inside the house with LED on day 14 was 29.0 ± 2 °C.

When broilers were 21 days old, T_s values in the house with fluorescent light source (FLU- 21) varied between 24 and 34 °C at the air inlet. In the remaining area, T_s ranged between 33 and 36 °C. A greater T_s variation was determined in the house with LED light source. The highest T_s values were found in the middle towards the air outlet (36 °C) (Figure 1c) in the LED house. The mean value of ambient temperature inside the house with LED house was 27.0 ± 2 °C on day 21.

Surface temperature during the finisher phase

Surface temperature when broilers were 28 days old remained lower in the areas close to the air inlet (24 to 31 °C) than in other areas of the fluorescent-lighted house. The T_s values found inside the LED-lighted house was 27 to 33 °C. Broilers in the other areas of the LED-lighted house presented a homogeneous distribution of T_s . The lower T_s values were determined in the house with LED light source (29 to 32 °C). The T_s values found inside the house with the source of

fluorescent light (FLU - 28) was 30 to 34 °C (Figure 2a). The mean value of ambient temperature during this phase inside the house with fluorescent light was 25.0 ± 2 °C.

Mean surface temperature of 35-d-old broilers reared in the house with fluorescent light source was higher than 35 °C, while those reared in the house with LED light source was 32 °C. The distribution of T_s in the area near the air outlet of the house with fluorescent light source (FLU 35) ranged between 24 and 32 °C. In the house with LED (32 °C), the variation was 24 to 29 °C (Figure 2b). The mean value of ambient temperature inside the house with fluorescent house was 24.0 ± 2 °C.

The variation in T_s when broilers were 42 days old was lower (27 to 33 °C) in the house with LED light source than in the house with fluorescent light source (24 to 31 °C). In the central area and the area near the air inlet and outlet, T_s ranged between 27 and 34 °C in the house with fluorescent light source. In the house with LED light source, mean T_s values were 24 to 34 °C (Figure 2c). The mean value of ambient temperature inside the house with LED was 23.0 ± 2.0 °C. Because temperature control was automatic and uniform along the house (Table 1), the T_s variation detected may have been caused by the birds' movement inside the house.

The variation of surface temperature depends on the interaction between the body heat, body insulation, surface blood circulation, and rearing temperature (Tao & Xin, 2003; Nääs *et al.*, 2010). As the air temperature of the evaluated houses was controlled (Table 1), the results of birds' surface temperature were relatively similar in both houses, which were different only as to the light source applied. The homeothermy in broilers is achieved by maintaining core body temperature close to 41.7 °C (Aerts *et al.*, 2003; Amaral *et al.*, 2011). Studies showed that the differences in broiler surface temperatures are associated with heat loss, as there are physiological changes when homeothermy is affected (Yahav *et al.*, 2005; Cangar *et al.*, 2008).

The different regions of the broilers' body contribute to a heat exchange, which occurs between the body surface and the surrounding environment (Yahav *et al.*, 2004; Shinder *et al.*, 2007). Malheiros *et al.* (2000) reported that skin thermal conductance increases when environmental temperature rises from 20 to 40 °C, causing an increase in peripheral blood flow. This is a key factor in the variation of broiler surface temperature; however, this was not detected in the present study.

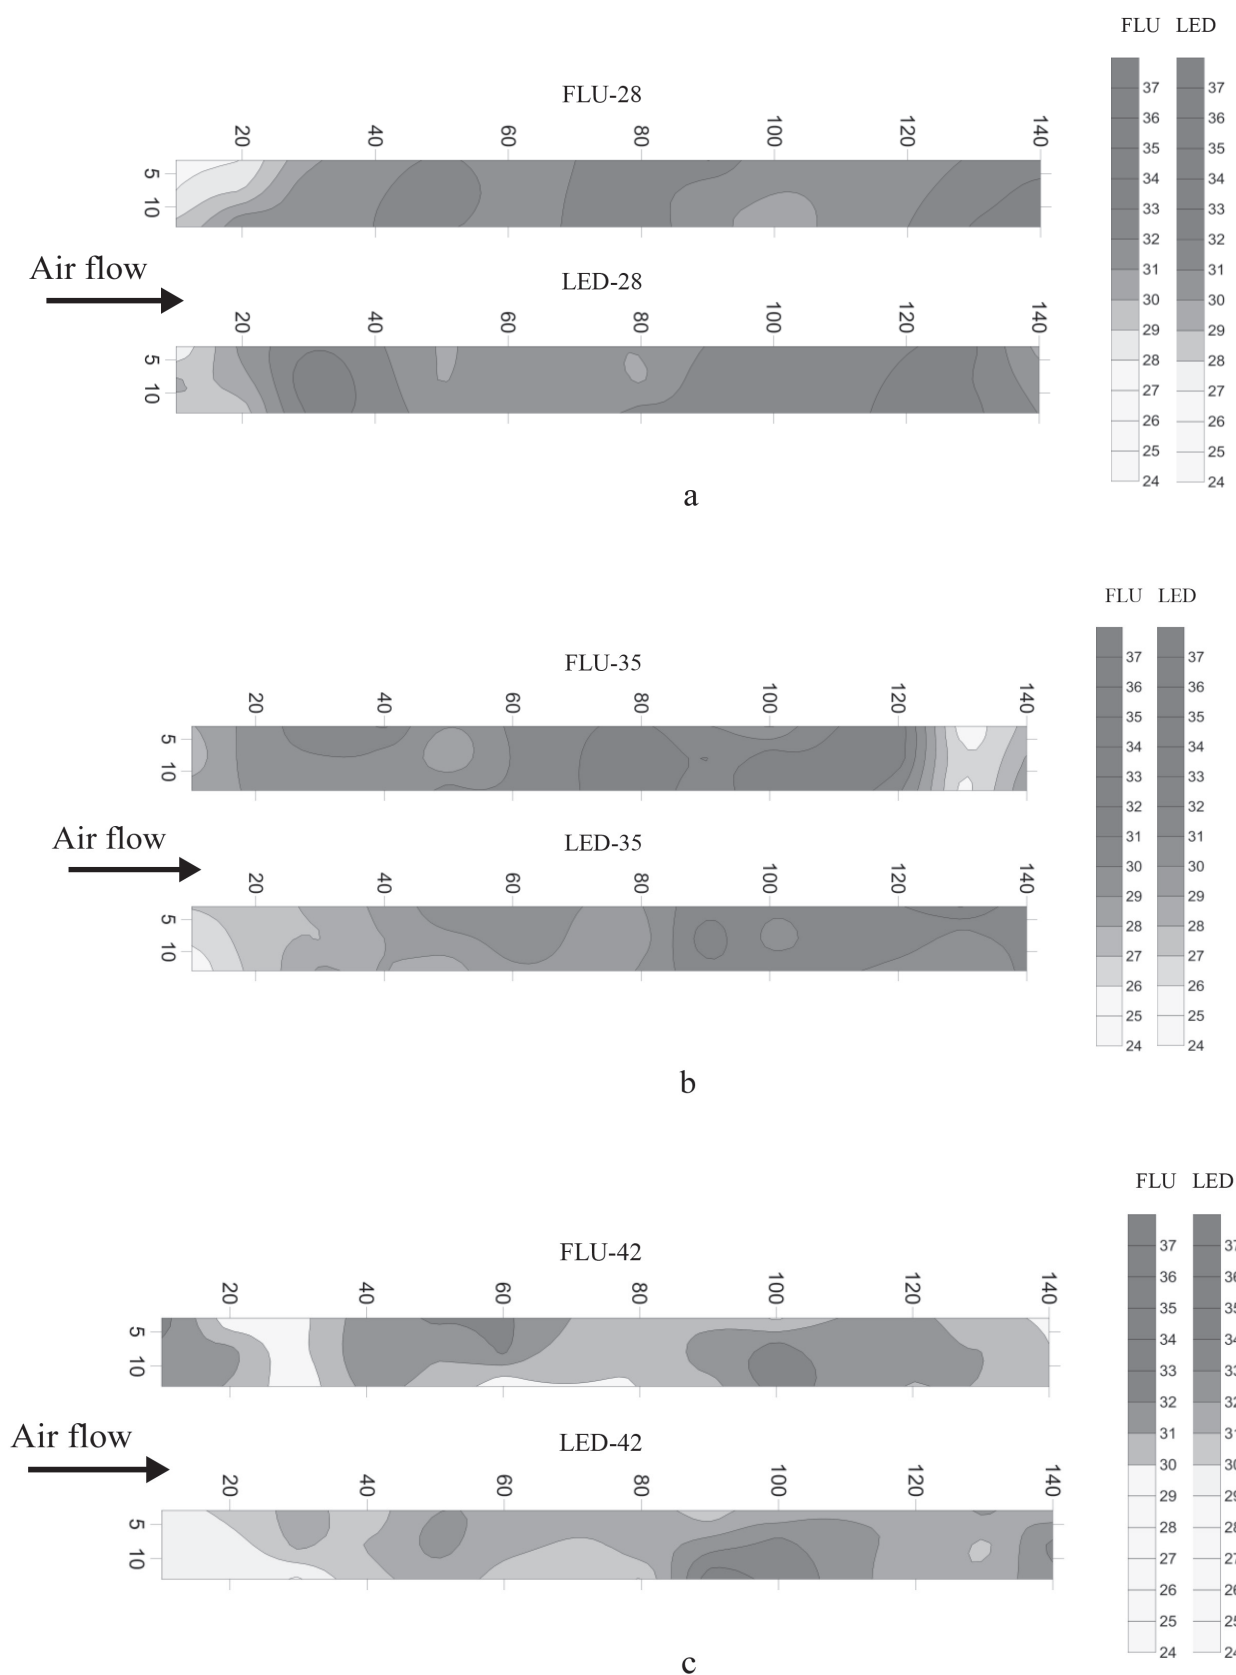


Figure 2 – Surface temperature (Ts) of broilers at 28 days of age inside broiler house with fluorescent lamps (FLU - 28) or with LED lamps (LED - 28) (a); at 35 days of age inside broiler house with fluorescent lamps (FLU - 35) or with LED lamps (LED - 35) (b); and at 42 days of age inside broiler house with fluorescent lamps (FLU - 42) or with LED lamps (LED - 42) (c); per quadrant (range 0.5 °C), corresponding to the finisher rearing phase.



Studies comparing changes in broiler surface temperature suggest that this variation is associated with room temperature or with dietary energy content (Ferreira *et al.*, 2011). In addition, average broiler T_s is also related with the temperatures of features of the rearing environment, such as side curtains and litter surface temperature (Baracho *et al.*, 2011; Nascimento *et al.*, 2014). Body surface temperature can vary in the different body parts as the broiler grows, depending on air temperature and the birds' feathering (Nääs *et al.*, 2010). In the present study, possibly both evaluated broiler houses (with fluorescent and LED light sources) maintained ideal environmental conditions for each phase of the grow-out period.

Caneppele *et al.* (2014) reported that LED lamps are more energy-efficient because of its manufacturing process allows the inclusion of sources emitting light at different wavelength. Rosa & Araújo (2010) commented that the LED is much more efficient from the point of view of energy use than other types of lamp and, therefore, are more affordable to consumers.

Relative to broiler behavior, there were no differences in the number of movements of comfort or discomfort, and normal or abnormal behaviors ($p = 0.224$) indicating that the behavior of broilers in both houses was similar (Table 3). Broilers exposed to different light intensities tend to show differences in some behaviors such as scratching; however, eating and drinking behaviors are not affected by light intensity (Kristensen *et al.*, 2007). Alvino *et al.* (2009) found that groups of broilers submitted to the same light intensity showed some degree of synchrony of behaviors and similar levels of inactivity. However, no effect of the light source on any of the evaluated behaviors was found in the present study.

Table 3 – Comfort (MC) and discomfort (MD) movement behaviors classified as abnormal and normal of broilers reared in houses equipped with fluorescent (FLU) light source or with light emitting diode (LED) light source.

Rating	Broiler behavior			
	MC	MD		
	FLU	LED	FLU	LED
Abnormal	45	41	7	4
Normal	15	19	5	8

n=104; significance level of 95%

The long life and energy savings obtained with the LED light source suggest its use in broiler production.

CONCLUSIONS

Broiler surface temperature in both broiler houses showed great variability, independently of the light source used. The evaluated light sources did not affect the behavior of broilers.

REFERENCES

- Abeyesinghe SM, Wathes CM, Nicol CJ, Randall JM. The aversion of broiler chickens to concurrent vibrational and thermal stressors. *Applied Animal Behaviour Science* 2001;73:199-215.
- Aerts M, Wathes CM, Berckmans D. Dynamic data-based behavior of heat production and growth of broiler chickens: development of an integrated management system. *Biosystems Engineering* 2003;84:257-266.
- Alvino GM, Archer GS, Mench JA. Behavioural time budgets of broiler chickens reared in varying light intensities. *Applied Animal Behaviour Science* 2009;118:54-61.
- Amaral AG, Yanagi Junior T, Lima RR, Teixeira VH, Schiassi L. Efeito do ambiente de produção sobre frangos de corte sexados criados em galpão comercial. *Arquivo Brasileiro de Medicina Veterinária e Zootecnia* 2011;63:649-658.
- Baracho MS, Nääs IA, Nascimento GR, Cassiano JA, Oliveira KR. Surface temperature distribution in broiler houses. *Brazilian Journal of Poultry Science* 2011;13:177-182.
- Berk J. Light-choice by broilers. *Proceedings of the 29th International Congress of the Society for Applied Ethology*; 1995; Potters Bar. UK: Universities Federation for Animal Welfare; 1995. p.525-26
- Bizeray D, Estevez I, Leterrier C, Faure JM. Effects of increasing environmental complexity on the physical activity of broiler chickens. *Applied Animal Behaviour Science* 2002;79:27-41.
- Caneppele FL, Marquesini IA, Gabriel Filho LRA, Seraphim OJA. Sensibilidade espectral do olho das aves e a importância da composição espectral das fontes de luz artificial [cited 2014 Mar 13]. *Anais do 3º Simpósio de Sustentabilidade e Ciência Animal*; 2013; Pirassununga, São Paulo. Brasil. Available from: eha://sisca.com.br/resumos/SISCA_2013_064.pdf.
- Cangar Ö, Aerts J-M, Buyse J, Berckmans D. Quantification of the spatial distribution of surface temperatures of broilers. *Poultry Science* 2008;87:2493-2499.
- Cobb – Cobb Vantress Brasil. Manual de manejo de frangos de corte Cobb. Guapiacu; 2009. p.1-65.
- Ferreira VMOS, Francisco NS, Belloni M, Aguirre GMZ, Caldara FR, Nääs IA, *et al.* Infrared thermography applied to the evaluation of metabolic heat loss of chicks fed with different energy densities. *Brazilian Journal of Poultry Science* 2011;13:113-118.
- Gongruttananun N, Guntapa P. Effects of red light illumination on productivity, fertility, hatchability and energy efficiency of Thai indigenous hens. *Kasetsart Journal of Natural Science* 2012;46:51-63.
- Kristensen HH, Prescott NB, Perry GC, Ladewig J, Ersbøll AK, Overvad KC, Wathes CM. The behavior of broiler chickens in different light sources and illuminances. *Applied Animal Behaviour Science* 2007;103:75-89.
- Lin H, Jiao HC, Buyse J, Decuyper F. Strategies for preventing heat stress in poultry. *World's Poultry Journal* 2006;62:71-85.



- Malheiros RD, Moraes VMB, Bruno LDG, Malheiros EB, Furlan RL, Macari M. Environmental temperature and cloacal and surface temperatures of broilers chicks in first weekpost hatch. *Journal of Applied Poultry Research* 2000;9:111-117.
- Medcalc. Statistical software version 13.3 [cited 2014 Apr 20]. Available from: http://www.medcalc.org/calc/odds_ratio.php.
- Mendes AS, Reffati R, Restelatto R, Paixão SJ. Visão e iluminação na avicultura moderna. *Revista Brasileira de Agrociência* 2010;16:05-13.
- Nääs IA, Romanini CEB, Neves DP, Nascimento GR, Vercellino R. A. Broiler surface temperature distribution of 42 day old chickens. *Scientia Agricola* 2010;67:497-502.
- Nascimento GR, Nääs IA, Baracho MS, Pereira DF, Neves DP. Termografia infravermelho na estimativa de conforto térmico de frangos de corte. *Revista Brasileira de Engenharia Agrícola e Ambiental* 2014;18:658-663.
- Olanrewaju HA, Thaxton JP, Dozier WA, Purswell J, Roushand WB, Branton SL. A Review of lighting programs for broiler production. *International Journal of Poultry Science* 2006;5(4):301-308.
- Prayitno DS, Phillips CJC, Stokes DK. The effects of color and intensity of light on behavior and leg disorders in broiler chickens. *Poultry Science* 1997;76:1674-1681.
- Rosa ECA, Araujo GF. Diodo emissor de luz. 2010 [cited 2014 Feb 13]. Available from: <http://www.demar.eel.usp.br/eletronica/2010/LED.pdf>.
- Rozenboim I, Biran I, Uni Z, Robinson B, Halevy O. The effect of monochromatic light on broiler growth and development. *Poultry Science* 1999; 78: 135-138.
- Shinder D, Rusal M, Tanny J, Druyan S, Yahav S. Thermoregulatory responses of chicks (*Gallus domesticus*) to low ambient temperatures at an early age. *Poultry Science* 2007;86:2200-2209.
- Surfer. Contouring 3D surface mapping for scientists and engineers. 2010 [cited 2014 Mar 12]. Available from: <http://www.goldensoftware.com>.
- Tao X, Xin H. Acute synergistic effects of air temperature, humidity, and velocity on homeostasis of market-size broilers. *Transactions of the ASAE* 2003;46:491-497.
- Vassarstat. Website for statistical computation [cited 2014 Apr 20]. Available from: <http://vassarstats.net/>.
- Yahav S, Straschnow A, Luger, D, Shinder D, Tanny J, Cohen S. Ventilation, sensible heat loss, broiler energy, and water balance under harsh environmental conditions. *Poultry Science* 2004;83:253-258.
- Yahav S, Shinder D, Tanny J, Cohen S. Sensible heat loss: the broiler's paradox. *World's Poultry Science Journal* 2005;61:419-434.