



Revista Brasileira de Ciência do Solo

ISSN: 0100-0683

revista@sbc.org.br

Sociedade Brasileira de Ciência do Solo  
Brasil

Corrêa, Rodrigo Studart; White, Robert Edwin; Weatherley, Anthony James  
MODELLING THE RISK OF NITRATE LEACHING FROM TWO SOILS AMENDED WITH FIVE  
DIFFERENT BIOSOLIDS

Revista Brasileira de Ciência do Solo, vol. 29, núm. 4, 2005, pp. 619-626

Sociedade Brasileira de Ciência do Solo

Viçosa, Brasil

Available in: <http://www.redalyc.org/articulo.oa?id=180214035014>

- How to cite
- Complete issue
- More information about this article
- Journal's homepage in redalyc.org

redalyc.org

Scientific Information System

Network of Scientific Journals from Latin America, the Caribbean, Spain and Portugal

Non-profit academic project, developed under the open access initiative

# SEÇÃO IX - POLUIÇÃO DO SOLO E QUALIDADE AMBIENTAL

## MODELLING THE RISK OF NITRATE LEACHING FROM TWO SOILS AMENDED WITH FIVE DIFFERENT BIOSOLIDS<sup>(1)</sup>

Rodrigo Studart Corrêa<sup>(2)</sup>, Robert Edwin  
White<sup>(3)</sup> & Anthony James Weatherley<sup>(4)</sup>

### SUMMARY

High N concentrations in biosolids are one of the strongest reasons for their agricultural use. However, it is essential to understand the fate of N in soils treated with biosolids for both plant nutrition and managing the environmental risk of  $\text{NO}_3^-$ -N leaching. This work aimed at evaluating the risk of  $\text{NO}_3^-$ -N leaching from a Spodosol and an Oxisol, each one treated with 0.5–8.0 dry Mg ha<sup>-1</sup> of fresh tertiary sewage sludge, composted biosolids, limed biosolids, heat-dried biosolids and solar-irradiated biosolids. Results indicated that under similar application rates  $\text{NO}_3^-$ -N accumulated up to three times more in the 20 cm topsoil of the Oxisol than the Spodosol. However, a higher water content held at field capacity in the Oxisol compensated for the greater nitrate concentrations. A 20 %  $\text{NO}_3^-$ -N loss from the root zone in the amended Oxisol could be expected. Depending on the biosolids type, 42 to 76 % of the  $\text{NO}_3^-$ -N accumulated in the Spodosol could be expected to leach down from the amended 20 cm topsoil.  $\text{NO}_3^-$ -N expected to leach from the Spodosol ranged from 0.8 (composted sludge) to 3.5 times (limed sludge) the amounts leaching from the Oxisol treated alike. Nevertheless, the risk of  $\text{NO}_3^-$ -N groundwater contamination as a result of a single biosolids land application at 0.5–8.0 dry Mg ha<sup>-1</sup> could be considered low.

**Index terms:** biosolids, sewage sludge, nitrogen leaching.

---

<sup>(1)</sup> Research at the University of Melbourne sponsored by CNPq and SEMARH/DF. Recebido para publicação em abril de 2003 e aprovado em maio de 2005.

<sup>(2)</sup> Lecturer at the Department of Forestry of the “Universidade de Brasília”. Caixa Postal 10.814, CEP 70324-980 Brasília (DF), Brazil. E-mail: rodmanager@yahoo.com.br

<sup>(3)</sup> Professor of Soil Science at the University of Melbourne – ILFR. Victoria 3010, Australia. E-mail: r.white@landfood.edu.au

<sup>(4)</sup> Lecturer at the Institute of Land and Food Resources of the University of Melbourne-ILFR. Victoria 3010, Australia. E-mail: weatherley@landfood.edu.au

**RESUMO:** *MODELAGEM DO RISCO DE LIXIVIAÇÃO DE NITRATO EM DOIS SOLOS TRATADOS COM CINCO DIFERENTES BIOSSÓLIDOS*

*Concentrações altas de nitrogênio (N) em bioossólidos são uma das maiores razões para a utilização agrônômica deles. Entretanto, é essencial entender o destino do N em solos tratados com bioossólidos, tanto por motivos de nutrição vegetal quanto para manejar o risco ambiental representado pela lixiviação de nitrato. Este trabalho teve como objetivo avaliar o risco de lixiviação de nitrato em um Espodosolo e em um Latossolo, cada um tratado com doses de 0,5 a 8,0 Mg ha<sup>-1</sup> de bioossólido fresco, bioossólido compostado, bioossólido caleado, bioossólido seco a calor e bioossólido irradiado por sol. Os resultados mostraram que, para doses iguais de aplicação, o nitrato acumulou-se até três vezes mais na camada superficial de 20 cm do Latossolo do que do Espodosolo. Entretanto, a maior capacidade de campo do Latossolo compensou as maiores concentrações de nitrato e espera-se a lixiviação de 20 % do nitrato acumulado na camada superficial desse solo. Dependendo do tipo de bioossólido, entre 42 e 76 % do nitrato acumulado no Espodosolo serão lixiviados. A expectativa de lixiviação de nitrato no Espodosolo variou de 0,8 (bioossólido compostado) a 3,5 vezes (bioossólido caleado) em relação ao Latossolo tratado de maneira similar. Entretanto, o risco de contaminação de aquíferos por lixiviação de nitrato nos solos tratados com uma dose única de bioossólidos entre 0,5 e 8,0 Mg ha<sup>-1</sup> foi considerado baixo.*

*Termos de indexação: bioossólidos, lodo de esgoto, lixiviação de nitrato.*

## INTRODUCTION

The constantly growing quantities of sewage sludge (biosolids) have led to their use as a source of organic matter for soils (Pascual et al., 1997). The idea of feeding valuable organic matter, containing primarily nitrogen (N) and phosphorus (P), back into the natural cycle forms the basis of using biosolids on land (Frank, 1998). High concentrations of N and P compared to manures and other organic matter sources are one of the strongest reasons for applying biosolids to soils.

Heavy metals, diseases, and environmental hazards related to the high N and P contents in biosolids stand out among the problems arising with the application of sewage materials to land. Therefore, health safety standards, maximum rates and frequency of application have been set according to the concentrations of pathogens, N, and heavy metals in biosolids. The USEPA Part 503 rule (USEPA, 1995) alludes to the need for the application of biosolids at agronomic rates based on biosolids' N content and the crop's N need.

Nutrient enrichment may lead to eutrophication of surface water and contamination of groundwater, which is strongly linked to N and P pollution originating from agriculture and waste sources (Sharpley et al., 1999). P in water is not considered directly toxic to humans and animals and therefore drinking water standards for P have not been established so far. On the other hand, NO<sub>3</sub><sup>-</sup> is reduced to NO<sub>2</sub> in human intestine and can cause methemoglobinemia in human infants if NO<sub>3</sub><sup>-</sup> is

present in sufficient quantity in drinking water. As a result, water is considered inappropriate for human consumption when NO<sub>3</sub><sup>-</sup>-N concentrations reach values of 10 mg L<sup>-1</sup> or higher (Haering et al., 2000). According to Polgase & Robison (1996), NO<sub>3</sub><sup>-</sup> leaching and subsequent groundwater contamination is potentially one of the most important factors limiting the long-term viability of biosolids application to land.

Two broad considerations in modelling NO<sub>3</sub><sup>-</sup> leaching are generally taken into account: the net input of NO<sub>3</sub><sup>-</sup> into soil and the transport of NO<sub>3</sub><sup>-</sup> with water through the soil (White et al., 1998). NO<sub>3</sub><sup>-</sup>-N leaching can be simulated by several models at various levels of detail and complexity in respect of temporal and spatial scales. One of the simplest simulations is the screening analysis that provides a rapid means of identifying potential NO<sub>3</sub><sup>-</sup> leaching problems (Shaffer et al., 1991). The screening approach uses a simplified water balance and the amount of NO<sub>3</sub><sup>-</sup>-N available for leaching. Shaffer et al. (1991) encourage the use of a screening analysis first, and then the use of more detailed approaches if significant amounts of NO<sub>3</sub><sup>-</sup>-N are expected to leach.

Our study aimed at evaluating the environmental risk associated with the agronomic use of biosolids. This risk was evaluated through the potential leaching of N as NO<sub>3</sub><sup>-</sup>-N from two contrasting soils incubated with the five most common stabilized biosolids: biologically activated sewage sludge, composted biosolids, limed biosolids, heat-dried biosolids and solar-irradiated biosolids.

## MATERIAL AND METHODS

### Sludge stabilization

A 500 kg sample of fresh tertiary treated biological domestic sewage sludge was taken at Coliban Water Treatment Works in Victoria (Australia) as raw material for stabilized biosolids (composted, limed, heat dried, and solar irradiated biosolids). The fresh sample was analysed in triplicate for gravimetric water content (105 °C for 48 h), total-N (dry combustion method), and mineral-N (Kjeldahl steam distillation -  $\text{NH}_4^+\text{-N} + \text{NO}_3^-\text{-N}$ ) method as described in Rayment & Higginson (1992).

Then, fresh sewage sludge (878 g  $\text{kg}^{-1}$  moisture, bulk density = 1.2  $\text{Mg m}^{-3}$ , C/N ratio = 6.2) were mixed with enough hardwood sawdust and woodchips (bulk agents) to achieve a C/N ratio = 25:1. Three 450 L composting piles were pitched on a sheltered cement pavement, run at 35–65 °C for 34 days, let to mature for another 60 days and sieved at 2 mm. Lime stabilization used CaO at a 30 % rate to fresh biosolids' dry solids (weight/weight). Heat drying was performed in a furnace at 250 °C until constant weight. The heat-dried biosolids were ground and passed through a 2 mm sieve. For the solar irradiation process, three 10 kg fresh sludge samples were stored in freely drained plastic bowls under transparent plastic-covers under sunny conditions for 14 days during Melbourne's summer (Australia), with daily temperatures ranging from 12.8–26.5 °C. The stabilization criteria established in USEPA (1995) were achieved in all the employed processes. All biosolids were analysed in triplicate for gravimetric water, total-N, mineral-N, using the same analytical methods for the fresh sludge (Table 1).

### Soils

Two contrasting soils (Table 2) were selected to be amended with the five biosolids: a sandy "Espodossolo Cárbico Órtico" (Spodosol) and a clayey "Latossolo Vermelho Perférico" (Oxisol) (Embrapa, 1999). Both soils had their 10 cm top layer removed before being collected from native areas. The aim was to simulate barren land situations, namely low

organic matter and nutrient contents. Such conditions can better isolate the effects of biosolids from any other organic matter previously present in the soils. A 200 kg sample of the Spodosol was collected from 10–30 cm depth. Another 200 kg sample of the Oxisol was collected from 10–50 cm depth. Both soils were air-dried for 2 weeks and then passed through a 4 mm sieve.

### Soil physical characteristics

Blank and biosolids-amended soil samples were analysed in triplicate for texture, bulk density- $\rho_b$ , total porosity-PSR and field capacity-FC (Cassel & Nielsen, 1986) before incubation for the simulation of  $\text{NO}_3^-\text{-N}$  leaching (Table 2).

### Mineralisation experiment

Triplicate 1.5 kg soil samples were amended with 0.5, 1.0, 2.0, 4.0, 6.0, and 8.0 dry Mg biosolids  $\text{ha}^{-1}$  and filled in 1.7 L free-draining pots. The amended-soils were wetted with deionised water to their pot capacity, as described by Cassel & Nielsen (1986), and covered with plastic lids punched with three 4 mm holes.

**Table 2. Some characteristics of the two selected soils (means  $\pm$  standard deviations, n = 3)**

Characteristic	Spodosol	Oxisol
	(10–30 cm)	(10–50 cm)
Total-N ( $\text{g kg}^{-1}$ )	0.38 $\pm$ 0.03	1.6 $\pm$ 0.11
Mineral-N ( $\text{mg kg}^{-1}$ )	0.1 $\pm$ 0.01	5.0 $\pm$ 0.08
pH [1:5 water $_{(w/v)}$ ]	4.9 $\pm$ 0.1	5.0 $\pm$ 0.1
Clay ( $\text{g kg}^{-1}$ )	48 $\pm$ 3	499 $\pm$ 38
Silt ( $\text{g kg}^{-1}$ )	37 $\pm$ 1	145 $\pm$ 9
Sand ( $\text{g kg}^{-1}$ )	915 $\pm$ 21	356 $\pm$ 19
$\theta_b$ ( $\text{Mg m}^{-3}$ )	1.6 $\pm$ 0.1	0.9 $\pm$ 0.1
PSR ( $\text{m}^3 \text{m}^{-3}$ )	0.41 $\pm$ 0.01	0.67 $\pm$ 0.08
FC ( $\text{m}^3 \text{m}^{-3}$ )	0.07 $\pm$ 0.02	0.31 $\pm$ 0.02

**Table 1. Moisture ( $\theta_g$ ), total-N, and mineral-N of biosolids (means  $\pm$  standard deviations, n = 3)**

Material	$\theta_g$	Total-N	Mineral-N
	$\text{g kg}^{-1}$		$\text{mg kg}^{-1}$
Fresh sludge	878 $\pm$ 2	65.1 $\pm$ 0.20	624 $\pm$ 54
Composted biosolids	551 $\pm$ 12	15.9 $\pm$ 0.71	277 $\pm$ 5
30 %-CaO biosolids	763 $\pm$ 0.2	40.1 $\pm$ 1.71	93.8 $\pm$ 4.6
250 °C-dried biosolids	34 $\pm$ 1	64.8 $\pm$ 0.31	356 $\pm$ 15
Solar-irradiated biosolids	801 $\pm$ 2	65.3 $\pm$ 0.63	803 $\pm$ 13

Pots containing amended soils were incubated at 25 °C ( $\pm 1$  °C) in a high humidity chamber (95 % air moisture) for 12 hours light/day during 23 weeks for a non-leaching experiment. Three pots containing 1.5 kg blank-Spodosol and three with blank-Oxisol were placed together with the others as control. Blank control soils and amended soils were mixed prior to each sampling, which occurred on day 0 and after 1, 3, 7, 15, and 23 weeks. Pots were randomised weekly and deionised water was sprayed over the surface every second week to replace moisture losses.

### Nitrate recovery from incubated soils

Incubated soil samples were extracted in triplicate from each pot with a 2 mol L<sup>-1</sup> KCl solution at 1:10 material/solution ratio and shaken for 1 hour. Extracts were immediately filtered through Whatman 42 paper filters and analysed on the same day for NO<sub>3</sub><sup>-</sup>-N by the Kjeldahl steam distillation method as described by Rayment & Higginson (1992). Means from each pot were grouped per treatment (three pots each) to calculate treatment means.

### Data for modelling

The modelling of NO<sub>3</sub><sup>-</sup>-leaching was based on the data collected from soil samples analysed on day 0 and in the 1<sup>st</sup>, 3<sup>rd</sup>, 7<sup>th</sup>, 15<sup>th</sup> and 23<sup>rd</sup> weeks of incubation (six months of trial). Monthly rainfall and pan-evaporation data (long-term means for Melbourne, latitude 37.81 South and longitude 144.97 East) were provided by the Bureau of Meteorology. Pan-evaporation values were converted to effective evapotranspiration by multiplying by the crop factor - 0.8 (Table 3).

**Table 3. Some long-term climate data for Melbourne**

Month	Rainfall	Effective evapotranspiration	Surplus water for leaching
mm			
January	48.7	148.8	-100.1
February	47.5	127.7	-82.2
March	51.0	101.7	-50.7
April	57.8	62.4	-4.6
May	57.3	48.1	9.2
June	50.0	29.6	20.4
July	48.2	38.7	9.5
August	50.5	44.6	5.9
September	59.0	62.4	-3.4
October	67.3	91.8	-24.5
November	59.9	112.8	-59.9
December	59.6	136.3	-76.7

Source: BOM (1999).

### NO<sub>3</sub><sup>-</sup>-N leaching model

NO<sub>3</sub><sup>-</sup>-N expected to leach from the amended 20 cm topsoils was modelled based on the studies of Shaffer et al. (1991) and White et al. (1998). Shaffer et al. (1991) introduced the Nitrate Leaching and Economic Analysis Package - NLEAP as a rapid and site-specific model for the estimation of NO<sub>3</sub><sup>-</sup>-N leaching potential. NLEAP uses an exponential probability density function (pdf) for predicting N leached for periods of time or cumulative drainage, which can be calculated as precipitation in excess of evaporation from meteorological data (White et al., 1998). Because the input variables are easily measured, White et al. (1998) point out the great potential of exponential pdf as a management tool. Edis (1998) explains that indigenous solutes such as NO<sub>3</sub><sup>-</sup>-N formed in soil are generally distributed throughout the water-filled porosity, which means that pdf-based models could describe changes in drainage flux of NO<sub>3</sub><sup>-</sup>-N concentrations advantageously (White et al., 1998). Using such a pdf approach, NO<sub>3</sub><sup>-</sup>-N expected to leach (N<sub>L</sub>) from the incubated soils' 20 cm layer was calculated by the formula:

$$N_L = N_0 \left[ 1 - \exp\left(\frac{-R}{FC}\right) \right] \quad (\text{Equation 1})$$

where N<sub>0</sub> is the amount of NO<sub>3</sub><sup>-</sup>-N available in a given soil layer (kg ha<sup>-1</sup>), R is surplus water for leaching (mm), and FC the field capacity of the soil layer (mm). Values of N<sub>0</sub> (kg ha<sup>-1</sup>) were derived from the NO<sub>3</sub><sup>-</sup>-N concentrations (mg kg<sup>-1</sup> soil) measured in weeks 0, 1, 3, 7, 15 and 23 of soil incubation.

The distance the leachate was transported through the soil profile in time was calculated according to White (1997):

$$z(t) = \frac{R}{FC} \quad (\text{Equation 2})$$

where Z is the distance (mm), t is a given time, R is surplus water for leaching (mm), and FC is the field capacity of the soil layer (m<sup>3</sup> m<sup>-3</sup>).

Data transformation from mg kg<sup>-1</sup> to kg ha<sup>-1</sup> and mg L<sup>-1</sup> considered a 20 cm soil layer, soil FC and bulk density. Analysis of variance and Tukey test were performed with Minitab® 12.1 for Windows.

## RESULTS AND DISCUSSION

### NO<sub>3</sub><sup>-</sup>-N available for leaching (N<sub>0</sub>)

From the environmental point of view, NO<sub>3</sub><sup>-</sup>-N accumulation in soils should be avoided. However, mineralization of biosolids' organic N and nitrification occurred in all amended soil samples



thereafter. Nitrification increased  $N_0$  according to both application rate and time and as a result accumulated a maximum of  $36 \text{ kg ha}^{-1}$  of  $\text{NO}_3^-$ -N in the Spodosol and  $86 \text{ kg ha}^{-1}$  of  $\text{NO}_3^-$ -N in the Oxisol after 23 weeks of biosolids-soil incubation (Table 4). Based on the concept that N loss is related to the amount of potentially leachable N present in soil, the risk of  $\text{NO}_3^-$ -N leaching from soils treated with biosolids would be greater with increased application rates and time.

For the same biosolids and application rate, amounts of nitrified and accumulated N varied in the two contrasting soils. Nitrification in the Spodosol was highest for solar-irradiated biosolids, then fresh = 30 %-CaO > composted = 250 °C-dried biosolids.  $\text{NO}_3^-$ -N accumulated three times as much in the Spodosol treated with solar-irradiated biosolids as with 250 °C-dried biosolids (Table 4). Amounts of  $\text{NO}_3^-$ -N produced in incubated Oxisol could be ranked as fresh = solar-irradiated > 250 °C-dried = composted, which is equivalent to 30 %-CaO biosolids. There was also an approximately three-fold difference between the highest and the lowest  $\text{NO}_3^-$ -N contents accumulated in the Oxisol (Table 4). Finally, the Spodosol and Oxisol treated with fresh and solar-irradiated biosolids ended up with the highest  $\text{NO}_3^-$ -N concentrations. These two biosolids manifested the highest potential for nitrate leaching, whereas the application of composted or 250 °C-dried biosolids to the soils would pose the least risk under the given experimental conditions.

The 250 °C-dried biosolids incubated in the Spodosol remained under  $4 \text{ mg NO}_3^-$ -N  $\text{kg}^{-1}$  soil throughout the entire trial, which poses no threat to groundwater. Low nitrification rates are frequently reported when heat-dried biosolids are incorporated into soils (Smith et al., 1998). Considering that soil pH, temperature and moisture were not unfavourable for the occurrence of nitrification during the experiment, the heat treatment, which sterilises sewage sludge for all kinds of organisms, must have caused a shortage of nitrifying organisms in the 250 °C-dried biosolids.

Smith et al. (1998) observed different  $\text{NO}_3^-$ -N concentrations in twelve biosolids incubated in soils. They found that the  $\text{NO}_3^-$ -N accumulation rate in soils was controlled by soil type and stability of the organic N contained in biosolids. Dewatering significantly reduces  $\text{NO}_3^-$  formation in amended soils through the removal of soluble  $\text{NH}_4^+$ -N (Smith et al., 1998). Similar results were found by Shepherd (1996) who reported that a lower initial  $\text{NH}_4^+$ -N content and mineralisation rates result in lower  $\text{NO}_3^-$ -N formation and less leaching from sludge-amended soils.

Modelling  $\text{NO}_3^-$ -N leaching based on incubated amended soils over time and without plant N uptake displays the worst scenario since  $\text{NO}_3^-$  leaching is higher in fallow soils than those where plants grow

(Laverman, 2000). Crop N uptake reduces leaching and  $\text{NO}_3^-$ -N losses from planted fields are likely to occur only when the crop N need is exceeded (Shepherd, 1996).

The Oxisol accumulated up to three times more  $N_0$  in the 20 cm topsoil ( $\text{kg ha}^{-1}$ ) than the Spodosol treated alike (Table 4). But as the Oxisol can hold approximately four times more water at FC than the Spodosol (Table 2), it can compensate higher  $N_0$  values.

### Soil water infiltration (R)

Water drainage is the most important factor for nitrate movement downwards into the soil profile (Edis, 1998). Under the present experimental conditions, the water drained in June was twice as much as in May and July and over three times as much as in August (Table 3). Since the highest risk of  $\text{NO}_3^-$ -N leaching from biosolids-amended soils occurred in June, this was the only month considered for modelling.

### Field capacity (FC)

Soil incorporation of biosolids is frequently reported to improve the soil structure and a higher amount of water held at FC may be expected (Joshua et al., 1998). Nevertheless, there were no significant changes in the physical characteristics of the Oxisol and the Spodosol caused by biosolids incorporation at  $0.5\text{--}8.0 \text{ dry Mg ha}^{-1}$ , except through the

**Table 4. Maximum  $\text{NO}_3^-$ -N concentrations retrieved from blank and amended-soils during 23 weeks of incubation**

Treatment	$\text{NO}_3^-$ -N	$\text{NO}_3^-$ -N (0–20 cm)
	$\text{mg kg}^{-1}$	$\text{kg ha}^{-1}$
Spodosol		
Blank-soil	0.99 a	2.9 a
Fresh bisolids	10.6 b	30 b
Composted biosolids	4.56 c	13.1 de
30 %-CaO-biosolids	9.44 b	27 b
250 °C-dried biosolids	3.72 c	10.7 d
Solar-irradiated biosolids	12.4 d	36 c
Oxisol		
Blank-soil	8.96 b	15.2 e
Fresh bisolids	50.4 e	86 f
Composted biosolids	19.2 fg	33 c
30 %-CaO-biosolids	17.2 g	29 b
250 °C dried biosolids	20.5 f	35 c
Solar-irradiated biosolids	50.5 e	86 f

Means with same letter within rows are not statistically different by the Tukey test.


incorporation of composted biosolids in the Spodosol (Figure 1). The application of composted biosolids linearly increased the water content held at FC, which may significantly reduce water percolation from the 20 cm amended topsoil.

Although not significant at  $p = 0.10$ , an opposite effect was noticed in the Spodosol treated with 30 %-CaO biosolids where the water content at FC tended to decrease (Figure 1). A reasonable explanation could not be found, but the application of CaO on the Spodosol seems to have a negative effect on the soil structure and needs to be further investigated.

Biosolids rates required to alter the soil's physical characteristics have been reported as very high. Epstein (1997) had to incorporate 100 dry Mg ha<sup>-1</sup> of fresh sewage sludge to a silt loam soil to observe a shifted soil water retention curve. Magesan et al. (1996) had to apply domestic sewage sludge consecutively for five years to a sandy soil in order to increase PSR and hydraulic conductivity. Such high application rates are not justified to avoid water percolation from soils, since the produced and leached NO<sub>3</sub><sup>-</sup>-N amounts would probably offset the higher water amounts retained at FC.

### NO<sub>3</sub><sup>-</sup>-N expected to leach (N<sub>L</sub>)


Data fitted to Equation 1 have shown that NO<sub>3</sub><sup>-</sup>-N expected to leach from amended soils (N<sub>L</sub>) ranged from 20 % to 76 % of the NO<sub>3</sub><sup>-</sup>-N available for leaching (N<sub>0</sub>), depending on both biosolids and soil types (Figure 2). Higher NO<sub>3</sub><sup>-</sup>-N concentrations in the Oxisol were in fact counterbalanced by higher amounts of water held at FC. As a result, top NO<sub>3</sub><sup>-</sup>-N concentrations expected to leach down from Oxisol treated with fresh or solar-irradiated biosolids reached 17 kg ha<sup>-1</sup> against 21–24 kg ha<sup>-1</sup> from Spodosol amended with solar-irradiated and 30 %-CaO biosolids (Figure 2).

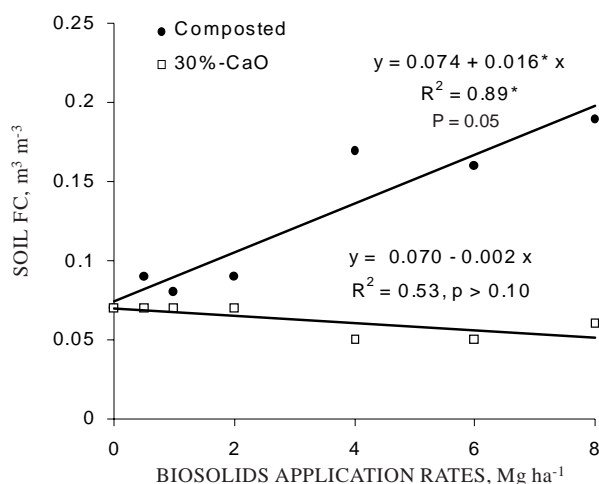

**Figure 1.** Spodosol's field capacity (FC) responses to the application of composted and 30 %-CaO biosolids.

Figure 2 depicts the combined effect of N<sub>0</sub> and FC on N<sub>L</sub>. As biosolids applied at 0.5–8.0 dry Mg ha<sup>-1</sup> did not change the Oxisol's water content at FC, N<sub>L</sub> depended on the amounts of mineralised and nitrified N in this soil over the trial period. A fixed 20 % loss of the nitrate stocked in the 20 cm amended-Oxisol topsoil (N<sub>0</sub>) was expected to leach regardless of the biosolids type (Figure 2). Composted and 30 %-CaO biosolids altered water content at FC in the Spodosol and different N<sub>0</sub> proportions were due to leach (N<sub>L</sub>) from this soil: N<sub>L</sub> was 42 % of N<sub>0</sub> from Spodosol treated with composted biosolids, 66 % for soil samples treated with fresh, 250 °C-dried and solar-irradiated biosolids, and 76 % of N<sub>0</sub> from the Spodosol treated with 30 %-CaO biosolids (Figure 2). As long as NO<sub>3</sub><sup>-</sup>-N contamination of groundwater is a concern, solar-irradiated and 30 %-CaO biosolids should not be applied to Spodosols. Composted and 250 °C-dried biosolids would be more appropriate to be used in such soils.

At a similar NO<sub>3</sub><sup>-</sup>-N concentration in both soils, nitrate would leach between 3–4 times more from the Spodosol's topsoil than from the Oxisol's (Figure 2). However, mineralization and nitrification rates of biosolids were different in the two soils. As a result, at the same biosolids and application rate the amounts of NO<sub>3</sub><sup>-</sup>-N expected to leach from the Spodosol's 20 cm topsoil (kg ha<sup>-1</sup>) ranged from 0.8 (composted biosolids) to 3.5 the amounts due to leaching from the topsoil of the Oxisol (Table 4 versus Figure 2). Nevertheless, leachate from the Spodosol was from 0.6 (composted biosolids) to 4.5 times (30 %-CaO biosolids) the nitrate concentrations leached from the Oxisol (Table 5).

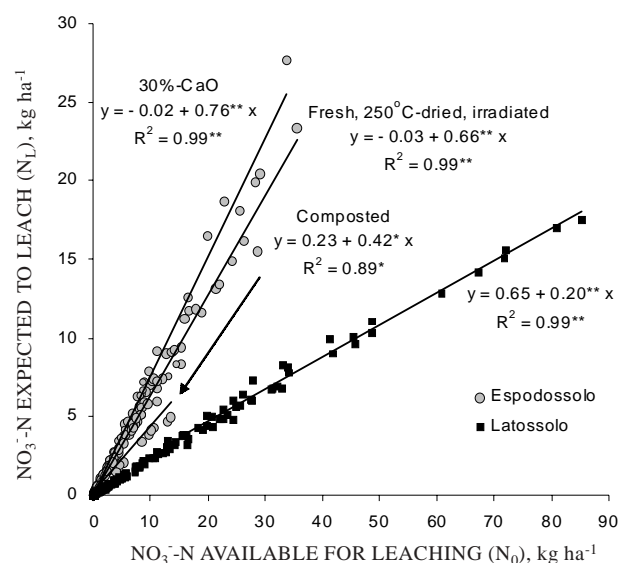

**Figure 2.** Regression of NO<sub>3</sub><sup>-</sup>-N expected to leach (N<sub>L</sub>) on NO<sub>3</sub><sup>-</sup>-N available for leaching (N<sub>0</sub>) for amended Spodosol and Oxisol considering 20 cm topsoil.

**Table 5. Leachate's maximum  $\text{NO}_3^-$ -N concentrations expected to leave the 20 cm amended-topsoils with 20.4 mm of drainage**

Treatment	Spodosol	Oxisol
	mg L <sup>-1</sup>	
Fresh sludge	75.5a	85.8f
Composted biosolids	28.4b	44.1g
30 %-CaO biosolids	135.8c	29.9b
250 °C-dried biosolids	35.3d	40.2g
Solar-irradiated biosolids	114.2e	83.3f

Means with same letter are not statistically different by the Tukey test.

### $\text{NO}_3^-$ -N leaching-distance into soil profile [z(t)]

As  $\text{NO}_3^-$ -N moves downward into the soil profile, the risk of groundwater contamination is reduced by dilution, since more water is needed for percolation and also because part of the  $\text{NO}_3^-$ -N is retained in a given soil layer. This effect was well demonstrated by Mitchell et al. (2000) who applied approximately 20 dry Mg ha<sup>-1</sup> of digested sewage sludge to a forested Spodosol in Scotland to recover 10 kg ha<sup>-1</sup>  $\text{NO}_3^-$ -N from the O<sub>1</sub> horizon, but only 4 kg ha<sup>-1</sup> from approximately 50 cm deeper.

Maximum surplus water under Melbourne conditions over a year (Table 3) would leach  $\text{NO}_3^-$ -N 64 cm deeper into the Spodosol's 20 cm toplayer, and 15 cm deeper into the Oxisol profile according to Equation 2. Such short distances travelled in a year do not threaten deep groundwater on a short-term basis. Lysimeter studies also indicated that the amount of  $\text{NO}_3^-$ -N leaching from an Argissolo (Ultisol) amended with sewage sludge at 30 dry Mg ha<sup>-1</sup> would not significantly affect groundwater (Barry et al., 1998).

Joshua et al. (1998) applied sewage sludge at 30–120 dry Mg ha<sup>-1</sup> to Australian pastures and measured significant  $\text{NO}_3^-$ -N movement in soils as deep as 70 cm after one year. But, as concentrations remained under 10 mg  $\text{NO}_3^-$ -N kg<sup>-1</sup> at such depth, they concluded that a single application of sewage sludge to pastures did not pose risks of groundwater contamination.

For a different rainfall regime the contribution from each factor (N<sub>0</sub>, R, FC) may change. Accordingly, some countries manage  $\text{NO}_3^-$  leaching risk from biosolids through rainfall. For instance, some European countries ban application of digested sludge between late summer and early winter to reduce water pollution by  $\text{NO}_3^-$ -N (Smith et al., 1998). Shepherd (1996) stated that sludges applied early in the United Kingdom autumn presented a greater potential for N leaching because of the greater winter rainfall and drainage.

$\text{NO}_3^-$  leaching is also sensitive to land management practices, with the largest losses usually occurring under bare fallow conditions. The presence of a cover crop may drastically reduce  $\text{NO}_3^-$  leachate since much of the mineralised N is taken up by plants (Edis, 1998; Shepherd, 1996). Values of  $\text{NO}_3^-$ -N expected to leach from 20 cm topsoils (Figure 2 and Table 5) would surely be lower for biosolids-treated soils under a cover crop. However, the relative leaching risks from the two selected soils amended with the five biosolids could be well illustrated here. The adopted approach could figure out the highest risk posed to groundwater by a single biosolids application. Such a risk can be considered low for the application rates used.

## CONCLUSIONS

1.  $\text{NO}_3^-$ -N expected to leach from biosolids incubated in the clayey Oxisol depended exclusively on the amounts of nitrified N. Changes in the sandy Spodosol's field capacity by some biosolids strongly influenced amounts of  $\text{NO}_3^-$ -N expected to leach from this latter soil.

2. The application of solar-irradiated and fresh biosolids at least doubled the risk posed by  $\text{NO}_3^-$ -N to groundwater compared to the application of composted, 250 °C-dried and 30 %-CaO biosolids to the Oxisol.

3. Composting and heat-drying could reduce the  $\text{NO}_3^-$ -N leaching risk of fresh sludge applications to Spodosol to a third.

4. For similar amounts of  $\text{NO}_3^-$ -N present in soils, the risk of  $\text{NO}_3^-$ -N leaching from Spodosol was between 3 and 4 times higher than from the Oxisol.

5. Leaching was limited to 64 cm soil depth below root zone and the risk of  $\text{NO}_3^-$ -N groundwater contamination caused by a single application of biosolids at rates up to 8.0 dry Mg ha<sup>-1</sup> can be considered low for both soils.



# LITERATURE CITED

- BARRY, G.A.; BLOESCH, P.; GARDNER, E.A.; RAYMENT, G.E. & HOGARTH, D.M. Re-use of sewage biosolids on canelands. In: CONFERENCE OF THE AUSTRALIAN SOCIETY OF SUGAR CANE TECHNOLOGISTS, 20., Ballina, 1998. Annals. New South Wales, Editorial Services, 1998. p.69-75.
- BUREAU OF METEOROLOGY - BOM. Melbourne climate data base. Access under < <http://www.bom.gov.au>>. Access date: July 13, 1999.
- CASSEL, D.K. & NIELSEN, D.R. Field capacity and available water capacity. In: KLUTE A., ed. Methods of soil analysis. Part 1: Physical Methods. Madison, American Society of Agronomy & Soil Science Society of America, 1986. p.901-926.
- EDIS, R. Transfer function modelling of bromite and nitrate leaching through soil with and without plants. Melbourne, The University of Melbourne - ILFR, 1998. 277p. (Tese de Doutorado)
- EMPRESA BRASILEIRA DE PESQUISA AGROPECUÁRIA - EMBRAPA. Centro Nacional de Pesquisa de Solos. Rio de Janeiro. Sistema brasileiro de classificação de solos. Brasília, Serviço de Produção de Informação - SPI, 1999. 412p.
- EPSTEIN, E. The science of composting. Pennsylvania, Technomic Publishing Company, 1997. 335p.
- FRANK, R. The use of biosolids from wastewater treatment plants in agriculture. *Env. Manag.*, 9:165-169, 1998.
- HAERING, K.C.; DANIELS, W.L. & FEAGLEY, S.E. Reclaiming mined lands with biosolids, manures, and papermill sludges. In: BARTELS, J., ed. Reclamation of drastically disturbed lands. Madison, American Society of Agronomy, Crop Service Society of America & Soil Science Society of America, 2000. p.615-644.
- JOSHUA, W.D.; MICHALK, D.L.; CURTIS, I.H.; SALT, M. & OSBORNE, G.J. The potential for contamination of soil and surface waters from sewage sludge (biosolids) in a sheep grazing study, Australia. *Geoderma*, 84:135-156, 1998.
- LAVERMAN, A.M.; ZOOMER, H.R.; VAN VERSEVELD, H.A. & VERHOEF, H.A. Temporal and spatial variation of nitrogen transformations in a coniferous forest soil. *Soil Biol. & Bioch.*, 32:1661-1670, 2000.
- MAGESAN, G.N.; CLYDON, J.J. & HARRIS, S. Influence of municipal effluent application on soil physical and hydraulic properties. In: INTERNATIONAL CONFERENCE - CONTAMINANTS AND THE SOIL ENVIRONMENT, 1., Adelaide, 1996. Annals. Adelaide, Australian Soil Science Society, 1996. p.269-270.
- MITCHELL, D.S.; EDWARDS, A.C. & FERRIER, R.C. Changes in fluxes of N and P in water draining a stand of Scots pine treated with sewage sludge. *Forest Ecol. Manag.*, 139:203-213, 2000.
- PASCUAL, J.A.; AYUSO, M.; GARCIA, C. & HERNÁNDEZ. Characterization of urban wastes according to fertility and phytotoxicity parameters. *Waste Manag. Res.*, 15:103-112, 1997.
- POLGASE, P.J. & ROBINSON, M.B. Sustainable use of biosolids in plantation forests. In: INTERNATIONAL CONFERENCE - CONTAMINANTS AND THE SOIL ENVIRONMENT, 1., Adelaide, 1996. Annals. Adelaide, Australian Soil Science Society, 1996. p.121-122.
- RAYMENT, G.E. & HIGGINSON, F.R. Australian laboratory handbook of soil and water chemical methods. Melbourne, Inkata Press, 1992. 225p.
- SHAFFER, M.J.; HALVORSON, A.D. & PIERCE, F.J. Nitrate leaching and economic analysis package (NLEAP): model description and application. In: FOLLETT, R.F., KEENEY, D.R. & CRUSE, R.M. eds. Managing nitrogen for groundwater quality and farm profitability. Madison, Soil Science Society of America, 1991. p.285-332.
- SHARPLEY, A.N.; DANIEL, T.; SIMS, T.; LEMUNYON, J.; STEVENS R. & PARRY, R. Agriculture phosphorus and eutrophication. Washington, United States Department of Agriculture - Agriculture Research Service, 1999. 37p.
- SHEPHERD, M.A. Factors affecting nitrate leaching from sewage sludges applied to sandy soil in arable agriculture. *Agric., Ecosys. Environ.*, 58:171-185, 1996.
- SMITH, S.R.; WOODS, V. & EVANS, T.D. Nitrate dynamics in biosolids-treated soils. I. influence of biosolids type and soil type. *Biores. Technol.*, 66:139-149, 1998.
- UNITED STATES ENVIRONMENTAL PROTECTION AGENCY - USEPA. A guide to the biosolids risk assessments for the EPA Part 503 rule. Washington, United States Environmental Protection Agency - Office of Wastewater Management, 1995. 143p.
- WHITE, R.E. Principles and practices of soil science: the soil as a natural resource. 3.ed. Victoria, Blackwell Science, 1997. 348p.
- WHITE, R.E.; HENG, L.K. & EDIS, R.B. Transfer function approaches to modeling solute transport in soils. In: MA, H.M.S.L., ed. Physical Nonequilibrium in soils: modeling and application. Michigan, Ann Arbor Press, 1998. p.311-347.