



Exacta

ISSN: 1678-5428

exacta@uninove.br

Universidade Nove de Julho
Brasil

Laranci, Paolo; Luz Silveira, José; de Queiróz Lamas, Wendell
SOLAR 1.1 software: a case study of a chicken farm illumination project
Exacta, vol. 10, núm. 1, enero-junio, 2012, pp. 58-69
Universidade Nove de Julho
São Paulo, Brasil

Available in: <http://www.redalyc.org/articulo.oa?id=81023342003>

- How to cite
- Complete issue
- More information about this article
- Journal's homepage in redalyc.org

redalyc.org

Scientific Information System
Network of Scientific Journals from Latin America, the Caribbean, Spain and Portugal
Non-profit academic project, developed under the open access initiative

SOLAR 1.1 software: a case study of a chicken farm illumination project

Aplicativo SOLAR 1.1: estudo de caso do projeto de iluminação de uma granja

Paolo Laranci

Pesquisador Associado do Departamento de Engenharia Industrial da Università degli Studi di Perugia.
Perugia, Umbria – Italia.
paolo.laranci@unipg.it

José Luz Silveira

Professor Titular do Departamento de Energia da Faculdade de Engenharia, campus de Guaratinguetá da Universidade Estadual Paulista.
Guaratinguetá, SP – Brasil.
joseluz@feg.unesp.br

Wendell de Queiróz Lamas

Pesquisador Associado do Laboratório de Otimização de Sistemas Energéticos da Faculdade de Engenharia, campus Guaratinguetá, da Universidade Estadual Paulista (Bolsista de Pós-Doutorado).
Guaratinguetá, SP – Brasil.
wendell@feg.unesp.br

Abstract

The aim of this paper is to describe the use of SOLAR 1.1 software to design an illumination system for a chicken farm. This software version also helps carry out the economic analysis for grid-connected or stand-alone photovoltaic systems for choosing practical values of the investment rate and annuity factor and calculates the payback period of investment in the photovoltaic plant.

Key words: Economic analysis. Photovoltaic cell. Photovoltaic systems. Solar radiation.

Resumo

O objetivo deste artigo é descrever o uso do aplicativo SOLAR 1.1 para projetar um sistema de iluminação para uma granja. Essa versão do aplicativo também possibilita realizar a análise econômica de sistemas fotovoltaicos conectados à rede elétrica ou isolados para escolha de valores práticos de taxa de investimento e fator de anuidade e calcula o período de retorno do investimento na planta fotovoltaica.

Palavras chave: Análise econômica. Célula fotovoltaica. Radiação solar. Sistemas fotovoltaicos.

1 Introduction

The fast increase of population in the world and the continuous improvement in living standards, even if in a restricted number of countries, are the causes which have raised, since the beginning of 20th century to the present, the demand for energy.

Today, the energy demand has reached a non-sustainable level with a consequent decrease in environmental quality and energy resources of the planet.

Also notably, environmental pollution is increasing along with energy production. In fact, the mechanical and thermal energies used are in great part produced by burning fossil fuels, namely petroleum, coal, and natural gas. From these resources is produced heat that can be converted into electrical or mechanical energy.

In industrialized countries, petroleum has been the most utilized source to produce energy. After the Second World War, with industrial expansion, petroleum demand duplicated due to high availability and low cost. Only in the end of 70s, after the energy crisis, was a new thinking introduced in society about the way to deal with the issue of energy. The problem of limited fossil fuel reserves and the growing attention to environmental degradation launched the use of alternative energy sources (EPE, 2008).

The heat from fossil fuels is derived from the chemical reaction of combustion in which carbon and hydrogen are oxidized. This reaction produces some dangerous substances: carbon monoxide and unburned hydrocarbons, through imperfect and incomplete combustion; sulphur dioxide, sulphuric anhydride and sulphuric acid, due to the presence of brimstone in the fuels and nitrogen oxides, through the oxidation of atmospheric nitrogen (EPE, 2008).

Another combustion product is carbon dioxide. This is an inert gas present in the atmosphere and is not dangerous for man. But it is not transparent to the infra-red radiation emitted by the Earth, so great concentrations of carbon dioxide produce the greenhouse effect and the consequent increase of the planet's temperature. For this reason, in 1997, the United Nations Framework Convention on Climate Change (UNFCCC) decided a decrease by 2010 of 5% in climate-altering emissions in the world (Kyoto protocol) (EPE, 2008).

Fossil fuels have also the characteristic of being located in concentrated form: they are found only in few parts of the planet. This is sometimes the cause of international tensions between countries that possess these sources and countries that want to acquire control over them (EPE, 2008).

A small part of energy demand is satisfied by non-emitting or low-emission sources. These are the renewable sources of energy, sources which are alternatives to petroleum and to other fossil fuels (EPE, 2008).

Renewable energy is any source of energy that can be used without depleting its reserves. These sources include sunlight or solar energy and other sources such as, wind, wave, biomass and hydro energy. These latter sources are indirectly derived from solar energy. Biomass refers to any recently produced organic matter. If the organic matter is produced sustainably, then it is considered to be a renewable energy resource (EPE, 2008).

Fossil fuels such as coal, oil and gas come from biomass that was produced in the distant past and has been transformed by geological activity. World reserves of fossil fuels are finite and are being depleted. They are therefore referred to as non-renewable energy sources (EPE, 2008).

Uranium for the generation of nuclear energy is not a fossil fuel but still requires the depletion of finite physical reserves, so it is included as a

non-renewable energy source. Some geothermal resources may be regarded as renewable because they are derived from energy sources deep within the earth's interior. The energy sources are so large that the rate of depletion by a geothermal energy extraction project is negligible. Projects based on using the remnant heat stored in shallowly-placed igneous rocks may be non-renewable. However, the use of energy from such sources does not produce greenhouse gases (EPE, 2008).

Another renewable resource, tidal power, results from harnessing tidal currents, which are caused mainly by the gravitational force of the moon on the oceans as it circles the earth (EPE, 2008).

Biomass is the only renewable energy source in use that releases carbon dioxide. However the carbon dioxide emitted is balanced by the incorporation of carbon from the atmosphere into the biomass while it grows. If the biomass resource is being used sustainably, there are no net carbon emissions over the time frame of a cycle of biomass production. This could be a year for agricultural crop waste, such as bagasse, or decades for forest products. In addition, minor amounts of greenhouse gases may be created in producing the technology to transform the renewable energy resource into usable energy (EPE, 2008).

Because the use of renewable energy creates so few greenhouse gas emissions, it is an important part of the world's response to the enhanced greenhouse effect.

The sun provides the energy to heat and light the earth, making it habitable. This energy is not traded commercially and hence is not included in energy statistics.

More than 80% of the world's commercial energy comes from non-renewable fossil fuels, Figure 1 (EPE, 2008).

It is evident that to contain polluting emissions and to avoid climatic alterations it is neces-

2006

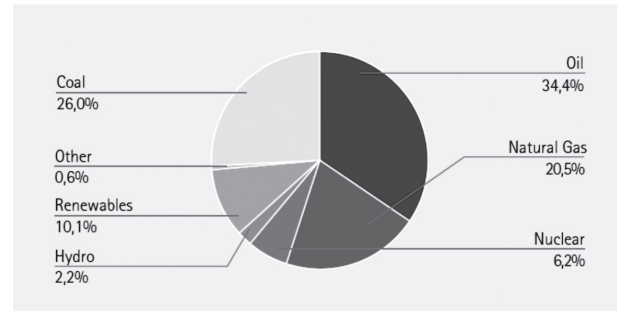
11741: 10⁶ toe

Figure 1: Share of world energy use by source (2006)

Source: Empresa de Pesquisa Energética – EPE (2008).

sary to make a greater use of renewable sources in the production of energy.

There are many technologies to use these sources to produce mechanical, thermal and electrical energy.

Solar energy is used to produce heat and electricity. Photovoltaic (PV) technology enables the transformation of solar energy into electric energy (NREL, 2009).

In this paper, a kind of renewable source is studied: the sun, and the technologies (photovoltaic systems) to convert solar radiation energy into electrical energy.

Renewable sources of energy are distributed almost evenly throughout the planet; so, differently from non-renewable sources, they offer the possibility of producing energy by working with local resources.

Particularly, photovoltaic energy represents an opportunity to produce electricity in all places in the world, especially in developing countries, where electricity grids are often unreliable or non-existent and making investments in grid expansion is inconvenient. Often, in remote locations, photovoltaic power is the most economic option. In addition, many developing countries have high insolation levels year-round (NREL, 2009).

Photovoltaic systems cause few environmental problems. The generating component produces electricity silently and does not emit any harmful gases during operation. The basic photovoltaic material for most common modules made out of silicon is entirely benign and is available in abundance (NREL, 2009).

One criticism of early PV modules was that they consumed more energy during their production than they generated during their lifetime. With modern production methods and improved operational efficiencies this allegation is no longer true. The exact energy payback is obviously dependent on the available solar resource and on the degree to which the system is operational. High levels of solar irradiation and utilization factors will offer more rapid energy paybacks than if there is less sun and less usage; but, typically, energy payback will be realized within three to four years (NREL, 2009).

Moreover, in the economic remarks relative to the use of energetic sources, the caused environmental damages are not considered. If they were, the energy produced by photovoltaic as well as by other renewable sources would be more competitive in comparison with traditional non-renewable sources (NREL, 2009).

Table 1 shows applications in which photovoltaic technologies can be used.

Photovoltaic systems create no emissions in the production of electricity. Avoided emissions are a very positive aspect. A study done by Kroposki and De Blasio (2000) showed that a 10kW photovoltaic system in Colorado avoids 10,105kg in CO₂ emissions and 1,801kg in NO_x emissions.

No pollution of the photovoltaic system can be inserted in the economic analysis. The Denver Service Guideline estimated the costs associated with the production of carbon dioxide (CO₂) at 0.0088US\$/kg, of sulphur dioxide (SO₂) at 1.65US\$/kg, and of nitrogen oxides (NO_x) at 7.48US\$/kg (EFFERT; THOMPSON, 2000).

Table 1: Applications for PV systems

Agriculture	<ul style="list-style-type: none"> • water pumping, irrigation • electric fencing for livestock and range management
Community	<ul style="list-style-type: none"> • water pumping, desalination and purification systems • lighting for schools and other community buildings
Domestic	<ul style="list-style-type: none"> • lighting, enabling studying, reading, income-producing activities and general increase in living standards • TV, radio, and other small appliances • water pumping
Healthcare	<ul style="list-style-type: none"> • lighting forwards, operating theatre and staff quarters • medical equipment • refrigeration for vaccines • communications (telephone, radio communications systems) • water pumping • security lighting
Small enterprises	<ul style="list-style-type: none"> • lighting systems, to extend business hours and increase productivity • power for small equipment, such as sewing machines, freezers, grain grinders, battery charging • lighting and radio in restaurants, stores and other facilities

The mean installation costs (including the devices) of photovoltaic systems were 5.7US\$/W_p for grid-connected systems and 13.9US\$/W_p for stand-alone systems in the USA (MORTENSEN, 2001). These high costs make the electricity produced by the photovoltaic plant expensive.

The panels' costs have an important influence on the final installation cost, between 40 and 75% (DELAHOY; KISS, 2000). Photovoltaic energetic sources will be a very attractive alternative when the panels' costs decrease, as is expected.

Hybrid options based on sustainable sources, mainly photovoltaic, have been studied as a solution for small rural villages' energy demand, such as in Chendo; Salawu, 1989; Dhere, 1989; Bailey et al., 1991; Song, 1994; Leitch; Van Der Linde, 1995; De Groot, 1997; Harford, 1998 and Valente; Almeida, 1998.

2 Methodology

The study presents the SOLAR 1.1 software, developed with the purpose of aiding in choosing among photovoltaic panels available commercially, including the electrical requirements calculation for the installation, applied to a case study for illumination of a chicken farm in Sao Paulo, Brazil. This new version of the program also helps to carry out economic analyses of grid-connected or stand-alone photovoltaic systems for choosing practical values of the investment rate and annuity factor, and it calculates the payback period of the investment in the photovoltaic plant.

For these evaluations, exergoeconomic modelling was used, as explained in Annex 1.

3 Project of a photovoltaic system for the illumination of a chicken farm

This section presents a project for a photovoltaic system using SOLAR 1.1 software (LARANCI et al., 2009a; LARANCI et al., 2009b).

The project objective is an electricity generator for a chicken farm located in Sao Paulo, Brazil. The electricity demand is for running the lights necessary to stir the chickens up during the night.

For this, it is necessary to produce energy to supply electricity for 232 lights of 25W each.

The projected photovoltaic plant is also compared with an alternative solution, in the form of a biogas engine.

3.1 Biogas engine case

The first solution presented to satisfy the energy demand is a biogas engine. In Table 2 all the parameters relative to the engine are shown.

The electricity production cost can be calculated through Equation (1) from these available values.

Table 2: Biogas engine

YANMAR MODELO NSB STANDARD 75	
Power	5.8kW
Biogas LHV (Low Heat Value)	22,000kJ/Nm ³
Biogas Price	1.00US\$/Nm ³
Engine Price	US\$350.00
Biodigester Price	US\$300.00
Maintenance Cost	0.01US\$/kWh
System Efficiency	0.27
Electricity Rate	0.08US\$/kWh

$$C_{elB} = \frac{I_{EG} + I_{BG}}{P \cdot H} \cdot f + C_{op} + C_{maEG} + C_{maBG} \quad (1)$$

Where:

C_{elB} = electricity production cost in the biogas engine system [US\$/kWh];

I_{EG} = investment for the engine and generator [US\$];

I_{BG} = investment for the biodigester [US\$];

P = installed power [kW];

H = equivalent period of utilisation number [h/year];

f = annuity factor [1/year];

C_{op} = operation costs [US\$/kWh];

C_{maEG} = maintenance cost for the engine and generator [US\$/kWh];

C_{maBG} = maintenance cost for the biodigester [US\$/kWh].

Table 3 shows the values of these parameters.

The electricity generation cost results in $C_{elB} = 0.069\text{US\$/kWh}$.

Now the expected annual savings can be calculated through Equation (2)

$$S_{eB} = P \cdot H \cdot (P_{el} - C_{elB}) \quad (2)$$

Where:

S_{eB} = expected annual savings in the biogas engine system [US\$/year];

P_{el} = electricity tax [US\$/kWh].

Table 3: Assumptions

I_{EG}	investment for the engine and generator [US\$]	350.00
I_{BG}	investment for the biodigester [US\$]	300.00
H	equivalent period of utilisation number [h/year]	2,5
C_{op}	operation costs [US\$/kWh]	0.007
C_{maEG}	maintenance cost for the engine and generator [US\$/kWh]	0.010
C_{maBG}	maintenance cost for the biodigester [US\$/kWh]	0.001
r	interest rate [%]	12
K	amortisation period [years]	1
F	annuity factor [1/year]	1.12

Substituting the values in Equation (2), the expected annual savings for the investment in the biogas electricity generator results in $S_{eB} = 165.09\text{US\$}/\text{year}$.

So, with the biogas engine, electricity is produced at a cost of $0.069\text{US\$}/\text{kWh}$; and comparing this cost with that for grid electricity, $0.08\text{US\$}/\text{kWh}$, results in an annual benefit of $165.09\text{US\$}/\text{year}$.

Now, the calculation of costs and expected annual savings will be made in the case of the photovoltaic plant in order to make a comparison between the two systems and to evaluate if the photovoltaic plant can be a practical alternative for producing the energy demanded.


3.2 Photovoltaic system case

For the project of the photovoltaic system, SOLAR 1.1 software was used to help with the calculations.

The project begins with the calculation of the daily and mean annual insolation of the site. To be able to do this operation, the software requires the value of the latitude and of the mean annual cloud cover.


For the town of Sao Paulo these values are: latitude: $23^{\circ}33'0''$ South and mean annual cloud cover of 5.0 tenths.

Inserting those values yields the results shown in Figure 2.

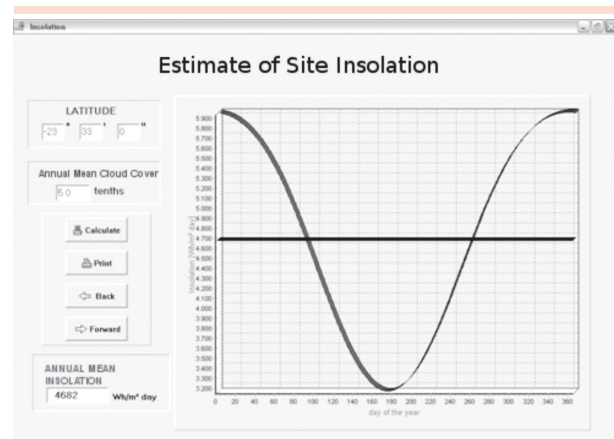
Figure 2: Site insolation

The estimated annual mean insolation is $4,682 \text{ Wh}/\text{m}^2$ per day; this value will be used in the following calculation for projecting the photovoltaic plant.

The energetic input data of the project are 232 lights of 25W each for an operation period of 10 hours per day (during the night). With insolation equal to the calculated value, the resulting value of peak power is $13,764.30\text{W}_p$ (Figure 3).

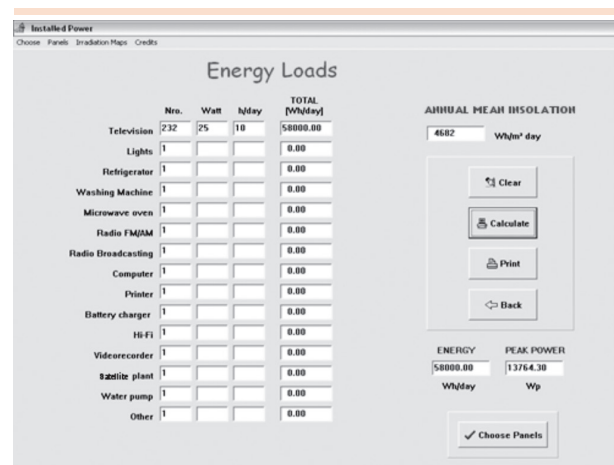
Figure 3: Calculation of peak power

Now it is possible to proceed with choosing the panels, clicking on the button Choose Panels.

Figure 4 shows the panels selected by the software.

	PRODUCER	CODE	TOTAL POWER (W)	EFFICIENCY (%)	TOTAL COST (R\$)	TOTAL NUM	TOTAL SURFACE (m²)
✓ MONOCRYSTALLINE	Astropower	AP-1206	13880	12.3	65913.40	115	112.83
✓ MULTICRYSTALLINE	SOLON	SOLON alpha	13790	10.7	53812.70	197	128.90
✓ AMORPHOUS	BP Solarex	MST-43-LV	13883	5.3	53873.43	321	263.81

Power Demand: 13764.30 Wp

Figure 4: Choosing the Panels

The chosen panels are: monocrystalline Astropower AP-1206; multicrystalline Solon Alpha; and amorphous BP Solarex MST-43-LV.

The choice with the lowest module cost is represented by the multicrystalline type. This solution is composed by 197 Solon Alpha panels for a total installed power of 13,790W_p and a total cost of US\$53,012.70.

Additional details about this type of panel are shown in Figure 5.

Now the economic analysis can begin.

Figure 5: Additional details on the SOLON Alpha panel

The required photovoltaic system can be a stand-alone type. In this case a battery is necessary to accumulate the electrical energy produced during the day in order to use it during the night. For a grid-connected type, the produced energy during the day will be fed to the grid; and during the night it will be taken from the grid.

Below are the results of the economic analysis for both photovoltaic system types.

After the insertion of the information for the economic analysis (Figure 6), it is possible to do the calculations. The results are shown in the Figure 7.

Figure 6: Information input for the economic analysis of the stand-alone PV system

Figure 7: Results of the economic analysis of the stand-alone PV system

For the calculation we inserted a value of the electricity current tariff of 0.08US\$/kWh and a marginal cost of expansion of the electricity offer of 0.2US\$/kWh (Figure 6).

Also, the results of costs calculation are compared with the case in which there is a governmental subsidy rate equal to 50% for the installation of the photovoltaic plant (Figure 6).

The first case analysed is the stand-alone system.

Among the results shown in this window (Figure 7), there is the estimate of the total energy produced by the photovoltaic plant during a year: about 26,500kWh.

Opening the electricity cost window, the values of the electricity production cost in the photovoltaic stand-alone system for the different values of interest rate and amortisation period can be seen (Figure 8).

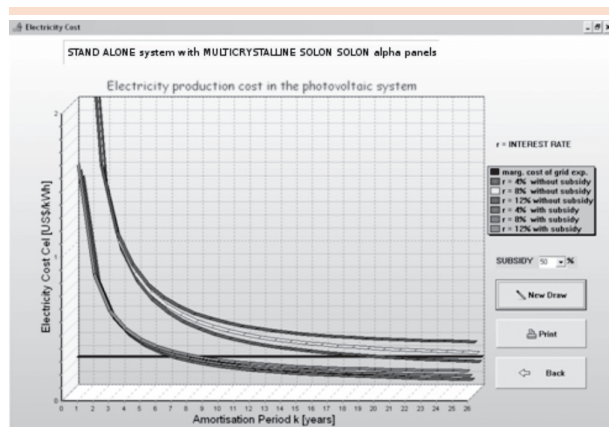


Figure 8: Electricity production cost in the stand-alone PV system

Figure 9 shows a zoomed-in view in which is possible to see the values for which the electricity production cost is lower than the marginal cost of expansion of the offer of electric energy.

Figure 10 shows the result of the calculation of the expected annual saving. In the figure there is a window of the SOLAR software showing curves of the annual saving as a function of the amortisation period. The different curves are rela-

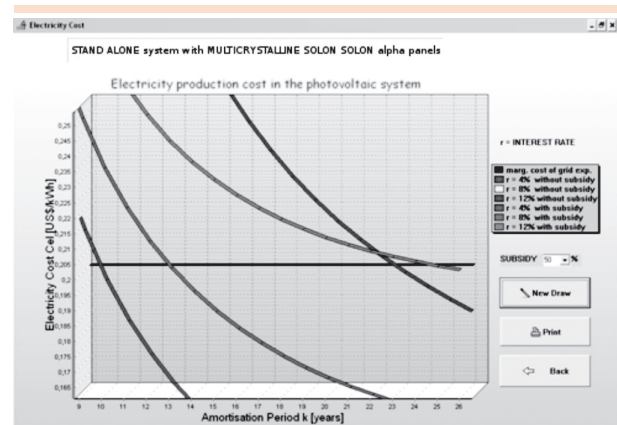


Figure 9: Zoomed-in view of electricity production cost in the stand-alone PV system

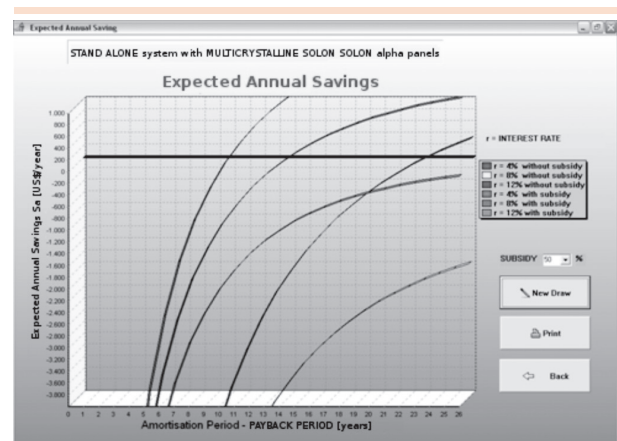


Figure 10: Expected annual savings in the stand-alone PV system

tive to different values of the interest rate and the governmental subsidy rate.

The conditions necessary for having electricity costs lower than the marginal cost of expansion of the grid are:

- an amortisation period greater than 11 years when the interest rate is 4% and the governmental subsidy rate is 50%;
- an amortisation period greater than 14 years when the interest rate is 8% and the governmental subsidy rate is 50%;
- an amortisation period greater than 24 years when the interest rate is 4% and there is no governmental subsidy rate.

Analysing the curves, the following results emerge: to have an annual savings greater than 170US\$/year, which is the value of the annual savings for the biogas engine, it is necessary to adopt:

- an amortisation period of 11 years with an interest rate of 4%, for an annual savings of 395US\$/year;
- an amortisation period of 15 years with an interest rate of 8% for an annual savings of 295US\$/year.

These values are both relative to the case of a governmental subsidy rate of 50%.

Without the subsidy rate, the value of amortisation period that gives an annual savings of 170US\$/year is 24 years.

Figure 11 shows the expected annual savings curves when the governmental subsidy rate is 25%. In this case, to have an annual savings greater than 170US\$/year, an amortisation period of 17 years and an interest rate of 4% that gives an annual benefit of 310US\$/years is necessary.

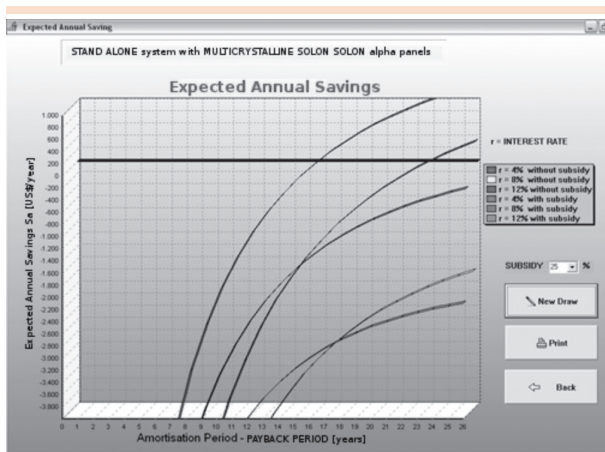


Figure 11: Expected annual savings in the stand-alone PV system with a governmental subsidy rate of 25%

Now, the results for the case of a grid-connected system will be analysed.

Figure 12 shows the results for a photovoltaic system of the grid-connected type.

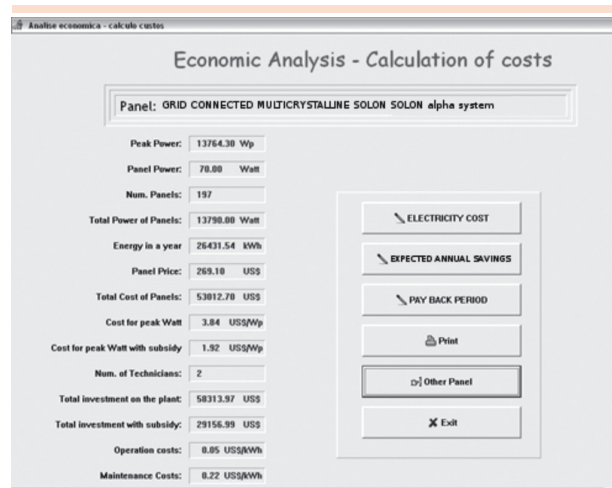


Figure 12: Results of the economic analysis for the grid-connected PV system

Figure 13 shows the electricity cost trend in this case.

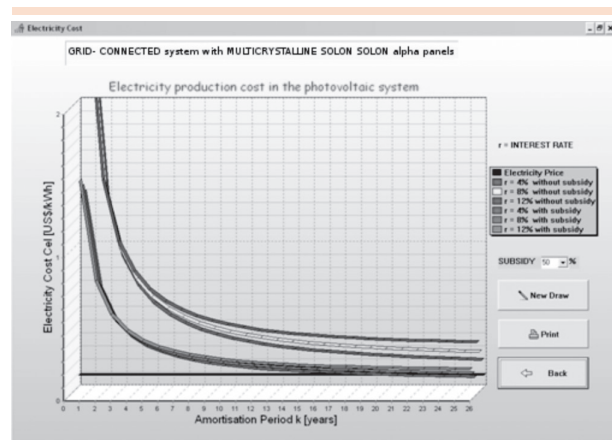


Figure 13: Electricity production costs in the grid-connected PV system

In the diagram shown in the window (Figure 13), it is possible to see that the electricity production cost in the grid-connected photovoltaic system is always greater than the electricity rate, equal to 0.08US\$/kWh. This will influence the value of the expected annual savings, which will always be less than zero (Figure 14 and Figure 15).

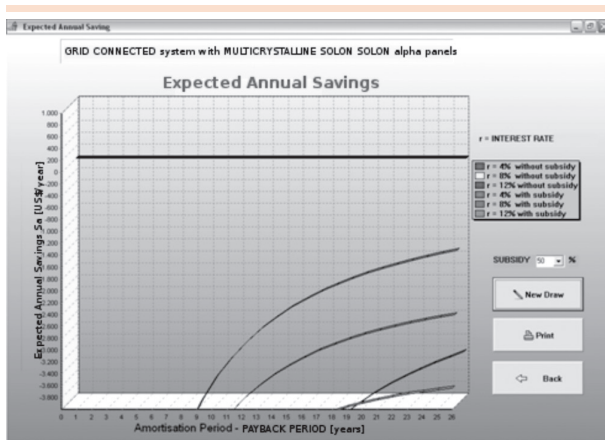


Figure 14: Expected annual savings in the grid-connected PV system

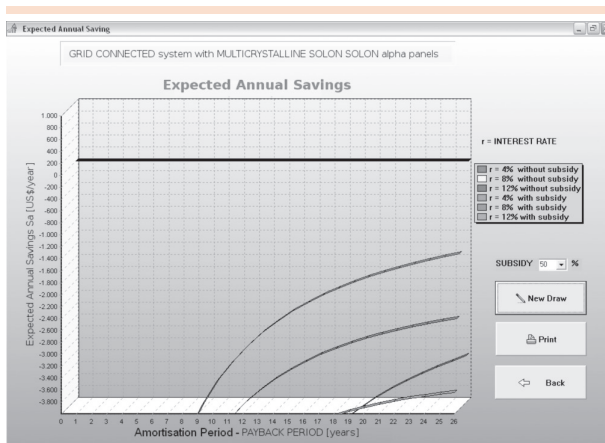


Figure 15: Expected annual savings in the grid-connected PV system

4 Conclusions

The analysis that was made in this case study gives the following results for the project case:

- a grid-connected photovoltaic system is not practical, as the expected annual savings is always negative, even when the value of the governmental subsidy rate is high;
- the stand-alone photovoltaic system represents an economically competitive alternative to the biogas engine, but only when the va-

lue of the governmental subsidy rate is high (about 50%);

- to have a higher benefit, the investment for installing the photovoltaic system requires an amortisation period longer than that for the investment for installing the biogas engine.

In conclusion, for Brazilian conditions, the use of the biogas engine to run a small electric generator can be a better solution than the photovoltaic system because its price makes the investment more practical.

The possibility of reducing the cost of panels is dependent on the government's initiative of giving incentives for the installation of photovoltaic systems.

References

- BAILEY, B.; PEREZ, R.; DOTY, J.; ELSHOLZ, K.; STEWART, R.; HUSE, W. Early experiences of the 15 kW NMPC demand-side management photovoltaic project. *Solar Cells*, v. 30, n. 1-4, p. 529-533, 1991.
- CHENDO, M. A. C.; SALAWU, R. I. Design considerations of a total energy power system for a rural health centre in Nigeria. *Solar & Wind Technology*, v. 6, n. 6, p. 747-54, 1989.
- DE GROOT, P. A photovoltaic project in rural Africa: a case study. *Renewable Energy*, v. 10, n. 2-3, p. 163-168, 1997.
- DELAHOY, A. E.; KISS, Z. J. *Photovoltaics: heading towards thin film*. New Jersey, USA: Energy Photovoltaic, Inc., 2000.
- HERE, N. G. The development of solar photovoltaic energy in Brazil. *Solar Cells*, v. 26, n. 1-2, p. 13-23, 1989.
- EFFERT, P.; THOMPSON, A. U.S. guidelines the economic analysis of building integrated photovoltaic power systems. *NREL National Renewable Energy Laboratory*, TP 710-25266, Colorado, USA, 2000.
- EPE. EMPRESA DE PESQUISA ENERGETICA (BRAZIL). *Brazilian Energy Balance 2008: year 2007*. Rio de Janeiro, RJ: EPE, 2008.
- HARFORD, J. R. J. BP solar and photovoltaic projects: a case study health centre rehabilitation project in Zambia. *Renewable Energy*, v. 15, n. 1-4, p. 491-495, 1998.

KROPOSKI, B. E.; DE BLASIO, R. Technologies for the new millennium: photovoltaics as a distributed resource. NREL – National Renewable Energy Laboratory, IEEE Power Engineering Society (PES), Seattle, Washington, July 16th-20th, 2000.

LARANCI, P.; SILVEIRA, J. L.; LAMAS, W. Q. SOLAR software applied to design a photovoltaic system to supply the energy demand of an Italian school. *Engenharia Térmica*, v. 8, n. 2, p. 84-91, 2009a.

LARANCI, P.; SILVEIRA, J. L.; LAMAS, W. Q. SOLAR 1.1: development of software for selecting commercially available photovoltaic panels, including the economic analysis. *Engenharia Térmica*, v. 8, n. 2, p. 21-34, 2009b.

LEITCH, A. W. R.; VAN DER LINDE, H. A. A photovoltaic project for the rural areas of the Eastern Cape, South Africa. *Renewable Energy*, v. 6, n. 5-6, p. 549-551, 1995.

MORTENSEN, J. Factors associated with photovoltaic system cost. NREL – National Renewable Energy Laboratory, TP 620-29649, 2001. Available at: <<http://www.nrel.gov/docs/fy01osti/29649.pdf>>. Accessed at: 12 June 2009.

NREL. NATIONAL RENEWABLE ENERGY LABORATORY (USA). *Solar Research*. Golden, CO: NREL, 2009.

SONG, J. Recent progress in national photovoltaic project in Korea. *Solar Energy Materials and Solar Cells*, v. 34, n. 1-4, p. 51-56, 1994.

VALENTE, L. C. G.; ALMEIDA, S. C. A. Economic analysis of a diesel-photovoltaic hybrid system for decentralized power in Northern Brazil. *Energy Journal*, v. 23, n. 4, p. 317-323, 1998.

ANNEX 1

Electric Energy Production Cost

$$C_{el} = \frac{I_{pl} \times \left(1 - \frac{Sub}{100}\right)}{E_p} \times f + C_{op} + C_{ma}$$

(a1)

Annuity Factor

$$f = \frac{q^k \times (q - 1)}{q^k - 1}$$

(a2)

$$q = 1 + \frac{r}{100}$$

(a3)

Energy Produced

$$E_p = \frac{\eta_M}{100} \times R_A \times A$$

(a4)

Total Investment Cost

$$I_{pl} = C_m \times n_m + C_d + C_b$$

(a5)

Operation Costs

Total Investment Cost

$$C_{op} = \frac{n_{tec} \times Sal \times n_m}{E_p}$$

(a6)

Expected Annual Savings

$$S_e = E_p \times (P_{el} - C_{el})$$

(a7)

Expected Annual Savings for Standalone System

$$S_e = E_p \times (C_{m_{ex}} - C_{el})$$

(a8)

Daily Demand Energy

$$E = \sum_{i=1}^k n_i \times P_i \times H_i$$

(a9)

Nominal Plant Power (Peak Power)

$$P_p = \frac{E \times 1,000}{0.9 \times R}$$

(a10)

In Eq. (A10), “1,000” is a standard value of irradiance, in W/m².

Energy Produced in a Year

$$E_p = R_A \times A \times \frac{\eta}{100} \quad (\alpha 11)$$

Annual Insolation

$$R_A = \int_0^{365} R dt \quad (\alpha 12)$$

Cost of Panel in Function of the Nominal Power for: Monocrystalline Panels, Equation (A13); Multicrystalline Panels, Equation (A14); and Amorphous Panels, Equation (A15)

$$C_m = 182.322875 \times 1.013406^{P_p} \quad (\alpha 13)$$

$$C_m = 306.118327 \times 1.008568^{P_p} \quad (\alpha 14)$$

$$\log(C_m) = 0.0180791 \times P_p + 4.73025 \quad (\alpha 15)$$

Nomenclature

- A PV panel surface, m²
- C_b cost of battery, US\$
- C_d cost of acquisition and installation of peripheral components, US\$
- C_{el} cost of electric energy production in the photovoltaic system, US\$/kWh

- C_{el} cost of electricity production in the PV system, US\$/kWh
- C_m cost of a photovoltaic module, US\$
- C_{ma} maintenance cost, US\$/kWh
- C_{mex} marginal cost of expansion of the electric energy offer, US\$/kWh
- C_{op} operation costs, US\$/kWh
- E daily demand energy, Wh/day
- E_p produced energy in a year, kWh/year
- F annuity factor, year⁻¹
- H_i number of daily operation of the i-load, h/day
- I_{pl} total investment in the plant, US\$
- K amortisation period, years
- n_i number of the i-load
- n_m number of module in the PV system
- n_w number of working months, generally 13
- n_{tec} number of technicians needed for the operation
- P_{el} electric tax, US\$/kWh
- P_i power of the i-load, W
- P_p peak power, W_p
- R annual mean daily insolation, Wh/m².day
- R annual interest rate, %
- R_A annual insolation, kWh/m².year
- S_{al} monthly salary of a technicians, US\$/month
- S_e expected annual savings, US\$/year
- S_{ub} governmental subsidy rate for the installation, %

Greek symbols

- η panel efficiency, %
- η_M module efficiency, %

Recebido em 29 jun. 2011 / aprovado em 23 mar. 2011

Para referenciar este texto

LARANCI, P.; SILVEIRA, J. L.; LAMAS, W. Q. SOLAR 1.1 software: a case study of a chicken farm illumination project. *Exacta*, São Paulo, v. 10, n. 1, p. 58-69, 2012.